



HP USB-C Mini Dock

Brand : HP

Product code: 1PM64AA

Product name : USB-C Mini Dock

USB-C Mini Dock

HP USB-C Mini Dock:


Stylish palm-sized power, ports, and portability

Be productive on the go with streamlined, pocket-sized port expansion that's fashionable and functional. The HP USB-C™ Mini Dock has a modern, textured design and packs pass-through charging^[1] and data, video, network, and device connectivity^[2] into a compact, portable dock.


HP USB-C Mini Dock. Connectivity technology: Wired, Host interface: USB 3.2 Gen 1 (3.1 Gen 1) Type-C. Ethernet LAN data rates: 10,100,1000 Mbit/s. Product colour: Black, Country of origin: China, Brand compatibility: HP. Power source type: AC, Output voltage: 15 V. Width: 145 mm, Depth: 55 mm, Height: 17.5 mm



| Ports & interfaces | | Performance | |
|----------------------------|----------------------------------|-----------------------------------|---|
| Connectivity technology * | Wired | Compatibility | HP x2 1012 G2 Tablet; HP x2 612 G2 Tablet; HP ProBook 470 G5; HP ProBook 450 G5; HP ProBook 440 G5; HP ProBook 430 G5; HP Elitebook x360; HP ChromeBook 13 G1; HP EliteBook x360 1020 G2; HP EliteBook Folio G1; HP EliteBook 1040 G4 |
| Host interface * | USB 3.2 Gen 1 (3.1 Gen 1) Type-C | | |
| USB 2.0 ports quantity * | 2 | | |
| HDMI ports quantity * | 1 | | |
| VGA (D-Sub) ports quantity | 1 | | |
| Microphone in * | ✗ | | |
| Network | | HP segment | Business |
| Ethernet LAN * | ✓ | Power | |
| Ethernet LAN (RJ-45) ports | 1 | Power source type | AC |
| Ethernet LAN data rates | 10,100,1000 Mbit/s | Output voltage | 15 V |
| Performance | | Operational conditions | |
| Card reader integrated * | ✗ | Operating temperature (T-T) | 0 - 40 °C |
| Product colour * | Black | Storage temperature (T-T) | -20 - 60 °C |
| Country of origin | China | Operating relative humidity (H-H) | 5 - 90% |
| Brand compatibility | HP | Storage relative humidity (H-H) | 5 - 95% |
| | | Weight & dimensions | |
| | | Width | 145 mm |
| | | Depth | 55 mm |
| | | Height | 17.5 mm |
| | | Weight | 132 g |
| | | Logistics data | |
| | | Harmonized System (HS) code | 84733020 |

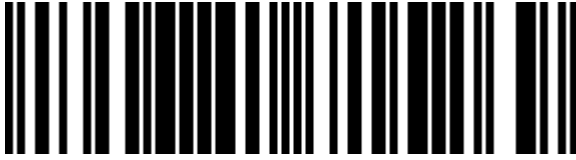


0190781715269




190781715269



0190781715283



190781715283

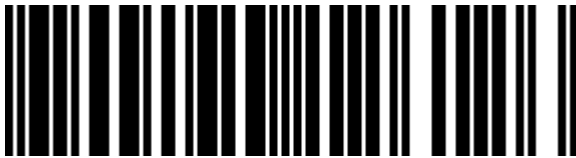

5704174126126

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.