



HP LaserJet Enterprise MFP M528f, Print, copy, scan, fax, Front-facing USB printing; Scan to email; Two-sided printing; Two-sided scanning

Brand : HP

Product family: LaserJet Enterprise

Product code: 1PV65A

Product name : HP LaserJet Enterprise MFP M528f, Print, copy, scan, fax, Front-facing USB printing; Scan to email; Two-sided printing; Two-sided scanning



- Front-facing USB printing; Scan to email; Two-sided printing; Two-sided scanning
 - Print, copy, scan, fax
 - Print speed up to 52 ppm (black) (HP High Speed)
 - Up to 1200 x 1200 dpi
- LaserJet Enterprise MFP M528f

HP LaserJet Enterprise MFP M528f, Print, copy, scan, fax, Front-facing USB printing; Scan to email; Two-sided printing; Two-sided scanning:

Choose an HP LaserJet Enterprise MFP designed to handle business solutions securely and efficiently, and helps conserve energy with HP EcoSmart toner black. Keep up with the demands of growing business with a printer you can rely on.^[1]

Dynamic security enabled printer Certain HP printers are intended to work only with cartridges that have a new or reused HP chip or electronic circuitry. These printers use dynamic security measures to block cartridges using a non-HP chip or electronic circuitry. Periodic firmware updates will maintain the effectiveness of these measures and block cartridges that previously worked. Reused HP chips and electronic circuitry enable the use of reused, remanufactured, and refilled cartridges.



Printing		Network	
Duplex printing mode	Auto	Ethernet LAN *	✓
Print resolution black	1200 x 1200 DPI	Cabling technology	10/100/1000Base-T(X)
Print technology *	Laser	Ethernet LAN data rates	10,100,1000 Mbit/s
Printing *	Mono printing	Security algorithms	SNMPv3, EAP-TLS, HTTPS, EAP-PEAP, IPsec, FIPS 140, SSL/TLS
Duplex printing *	✓	Mobile printing technologies	Google Cloud Print, Apple AirPrint, HP ePrint, Mopria Print Service
Maximum resolution *	1200 x 1200 DPI	Performance	
Print speed (black, normal quality, A4/US Letter) *	43 ppm	Maximum internal memory	3840 MB
Warm-up time	202 s	Memory slots	1
Time to first page (black, normal)	6 s	Internal storage capacity	500 GB
N-in-1 print function	✓	Internal memory *	1780 MB
Watermark printing	✓	Built-in processor	✓
Secure printing	✓	Processor frequency	1200 MHz
Copying		Sound pressure level (printing)	54 dB
Duplex copying *	✓	Sound pressure level (scanning)	52 dB
Copying *	Colour copying	Sound power level (printing)	6.8 dB
Maximum copy resolution *	600 x 600 DPI	Sound power level (standby)	25 dB
Copy speed (black, normal quality, A4)	43 cpm	Design	
Time to first copy (black, normal)	6.5 s	Product colour *	Black, White
Maximum number of copies	9999 copies	Market positioning *	Business
Copier resize	25 - 400%	Built-in display *	✓
N-in-1 copy function	✓	Display	LCD
Book copy function	✓	Display diagonal	20.3 cm (8")
ID-card copy function	✓	Display resolution	1024 x 768 pixels
Auto fit function	✓	Touchscreen	✓
Scanning		Control type	Touch

Scanning		Design	
Duplex scanning *	✓	Colour display	✓
Scanning *	Colour scanning	Power	
Optical scanning resolution *	600 x 600 DPI	Power consumption (average operating)	629 W
Maximum scan resolution	600 x 600 DPI	Power consumption (PowerSave)	0.06 W
Maximum scan area	216 x 356 mm	Power consumption (printing)	629 W
Scanner type *	Flatbed & ADF scanner	Power consumption (ready)	28.8 W
Scan technology	CIS	Power consumption (sleep)	5.3 W
Scan to	E-mail, Network folder, USB	Power consumption (off)	0.06 W
Scan speed (colour)	38 ppm	Energy Star Typical Electricity Consumption (TEC)	0.446 kWh/week
Scan speed (black)	43 ppm	AC input voltage	100 - 240 V
Image formats supported	MTIFF, JPEG, TIFF	AC input frequency	50/60 Hz
Document formats supported	XPS, PDF	Brand-specific features	
Input colour depth	24 bit	HP Auto-On/Auto-Off	✓
Greyscale levels	256	System requirements	
Fax		Windows operating systems supported	Windows 7, Windows 8.1, Windows 10, Windows 8, Windows 11
Faxing *	Mono faxing	Mac operating systems supported	Mac OS X 10.14 Mojave, Mac OS X 10.13 High Sierra, Mac OS X 10.12 Sierra
Fax resolution (black)	300 x 300 DPI	Linux operating systems supported	✓
Fax transmission speed	3 sec/page	Other operating systems supported	Android, iOS
Modem speed	33.6 Kbit/s	Operational conditions	
Fax memory	500 pages	Operating relative humidity (H-H)	10 - 80%
Auto-redialing	✓	Recommended humidity operating range	30 - 70%
Speed dialling	✓	Operating temperature (T-T)	10 - 32.5 °C
Fax forwarding	✓	Certificates	
Fax broadcasting	210 locations	Certification	CISPR 22:2008 (International) - Class A, CISPR32:2012 (International) - Class A, EN 55032:2012 (EU) - Class A, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 55024:2010, EMC Directive 2014/30/EU, FCC CFR 47 Part 15 Class A/ICES-003, Issue 6 Class A. Other EMC approvals as required by individual countries.
Fax delayed sending	✗	Sustainability	
Auto reduction	✓	Sustainability compliance	✓
Features		Sustainability certificates	EPEAT Silver, ENERGY STAR, Blue Angel
Recommended duty cycle	2000 - 7500 pages per month	Sustainable technologies and materials	Mercury free
Maximum duty cycle *	150000 pages per month	Doesn't contain	Mercury
Duplex functions *	Print, Copy, Scan	Weight & dimensions	
Digital sender	✓	Width	482 mm
Number of print cartridges *	1	Depth	496 mm
Printing colours *	Black	Height	497 mm
Page description languages	PCL 6, PDF 1.7, PostScript 3	Weight	21.9 kg
Printer fonts	PostScript, Scalable, TrueType, Windows	Packaging data	
All-In-One-multitasking	✓	Package width	735 mm
Country of origin	Mexico, Netherlands, China	Package depth	592 mm
HP segment	Business	Package height	613 mm
Input & output capacity		Package weight	29.2 kg
Total number of input trays *	2	Packaging content	
Total input capacity *	650 sheets	Cables included	AC
Total output capacity *	250 sheets	Warranty card	✓
Paper tray 1 input capacity	100 sheets	Quick installation guide	✓
Paper tray 2 input capacity	550 sheets		
Multi-Purpose tray	✓		
Multi-Purpose tray input capacity	100 sheets		
Paper input type	Sheetfed		
Auto document feeder (ADF)	✓		
Auto document feeder (ADF) input capacity	100 sheets		
Maximum number of input trays	5		
Maximum input capacity	2300 sheets		
Maximum output capacity	250 sheets		
Paper handling			
Maximum ISO A-series paper size *	A4		
Maximum print size	212 x 352 mm		

Paper handling		Logistics data	
Paper tray media types *	Envelopes, Rough paper, Letterhead, Bond paper, Plain paper, Card stock, Transparencies, Labels, Recycled paper	Harmonized System (HS) code	84433100
ISO A-series sizes (A0...A9) *	A4, A5, A6	Pallet gross weight	199 g
ISO B-series sizes (B0...B9)	B5	Layers per pallet	3 pc(s)
ISO C-series sizes (C0...C9)	C5, C6	Products per pallet	6 pc(s)
Non-ISO print media sizes	Oficio, 16K	Technical details	
JIS B-series sizes (B0...B9)	B5, B6	Master (outer) cases per pallet layer	2 pc(s)
Envelopes sizes	B5, C5, C6, DL		(ABT) 192545079563; (ABY) 192545079570; (ACQ) 192545079587; (B13) 192545079600; (B19) 192545079617; (BAZ) 192545079624
Photo paper sizes	10x15 cm	EAN/UPC/GTIN and local identifier(s)	
Custom media width	76.2 - 215.9 mm		192545079563, 192545079570, 192545079587, 192545079600, 192545079617, 192545079624
Custom media length	127 - 355.6 mm	EAN/UPC/GTIN identifier(s)	
Paper tray media weight	60 - 200 g/m ²		
Ports & interfaces		Other features	
Standard interfaces	Ethernet, USB 2.0	Number of users	15 user(s)
USB port	✓	Pallet dimensions (W x D x H)	1200 x 800 x 1973 mm
USB 2.0 ports quantity	4	Recommended system requirements	2 GB available hard disk space, Internet connection, USB port, Internet browser.
		Acoustic power emissions (ready)	40 dB
		Acoustic pressure emissions bystander (ready)	26 dB



0192545079662



192545079662



0192545079556



192545079556



0192545079631



192545079631



0192545079495




192545079495



0192545079501



192545079501

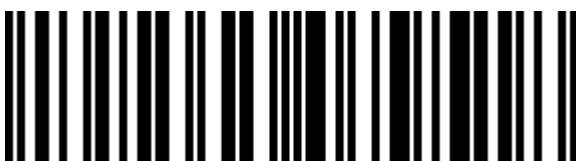

0192545079518



192545079518



0192545079525



192545079525



0192545079563



192545079563



0192545079570



192545079570



0192545079648




192545079648



0192545079532




192545079532

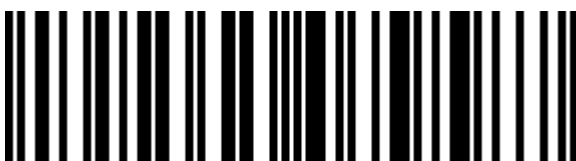

0192545079587



192545079587

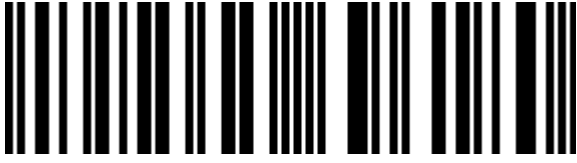

0192545696180



192545696180



0192545079594



192545079594



0192545079679



192545079679



0192545079624




192545079624



0192545079549



192545079549

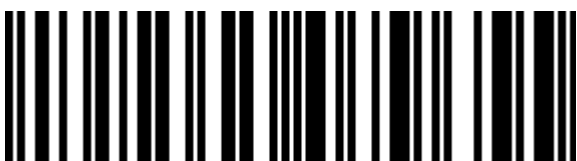

0192545079655



192545079655



0192545079600



192545079600



0192545079617



192545079617

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.