



HP LaserJet Enterprise MFP M430f, Black and white, Printer for Business, Print, copy, scan, fax, 50-sheet ADF; Two-sided printing; Two-sided scanning; Front-facing USB printing; Compact Size; Energy Efficient; Strong Security



Brand : HP

Product family: LaserJet Enterprise

Product code: 3PZ55A

Product name : HP LaserJet Enterprise MFP M430f, Black and white, Printer for Business, Print, copy, scan, fax, 50-sheet ADF; Two-sided printing; Two-sided scanning; Front-facing USB printing; Compact Size; Energy Efficient; Strong Security

- 50-sheet ADF; Two-sided printing; Two-sided scanning; Front-facing USB printing; Compact Size; Energy Efficient; Strong Security
 - Print, copy, scan, fax
 - Up to 40 ppm (black)
 - Up to 1200 x 1200 dpi
- LaserJet Enterprise MFP M430f

HP LaserJet Enterprise MFP M430f, Black and white, Printer for Business, Print, copy, scan, fax, 50-sheet ADF; Two-sided printing; Two-sided scanning; Front-facing USB printing; Compact Size; Energy Efficient; Strong Security:

Dynamic security enabled printer Certain HP printers are intended to work only with cartridges that have a new or reused HP chip or electronic circuitry. These printers use dynamic security measures to block cartridges using a non-HP chip or electronic circuitry. Periodic firmware updates will maintain the effectiveness of these measures and block cartridges that previously worked. Reused HP chips and electronic circuitry enable the use of reused, remanufactured, and refilled cartridges.

Printing		Network	
Duplex printing mode	Auto	Cabling technology	10/100/1000Base-T(X)
Print resolution black	1200 x 1200 DPI	Ethernet LAN data rates	10,100,1000 Mbit/s
Print technology *	Laser	Wi-Fi Direct	✓
Printing *	Mono printing	Security algorithms	EAP-PEAP, EAP-TLS, FIPS 140, HTTPS, IPsec, SNMPv3, SSL/TLS
Duplex printing *	✓	Mobile printing technologies	Apple AirPrint, HP ePrint, Mopria Print Service
Maximum resolution *	1200 x 1200 DPI	Performance	
Print speed (black, normal quality, A4/US Letter) *	38 ppm	Maximum internal memory	2048 MB
Warm-up time	180 s	Internal storage capacity	16 GB
Time to first page (black, normal)	6.5 s	Card reader integrated	✗
N-in-1 print function	✓	Internal memory *	2048 MB
Watermark printing	✓	Built-in processor	✓
Secure printing	✓	Processor frequency	800 MHz
Copying		Sound pressure level (printing)	54 dB
Duplex copying *	✓	Sound pressure level (scanning)	48 dB
Copying *	Mono copying	Sound power level (printing)	6.4 dB
Copy speed (black, normal quality, A4)	38 cpm	Design	
Time to first copy (black, normal)	7.2 s	Product colour *	White
Scanning		Market positioning *	Business
Duplex scanning *	✓	Built-in display *	✓
Scanning *	Colour scanning	Display	LCD
Optical scanning resolution *	600 x 600 DPI	Display diagonal	10.9 cm (4.3")
Maximum scan resolution	600 x 600 DPI	Control type	Touch
Maximum scan area	216 x 297 mm	Colour display	✓

Scanning		Power	
Scanner type *	Flatbed & ADF scanner	Power consumption (average operating)	525 W
Scan technology	CIS	Power consumption (PowerSave)	0.08 W
Scan speed (colour)	20 ppm	Power consumption (printing)	525 W
Scan speed (black)	29 ppm	Power consumption (ready)	10.1 W
Duplex scan speed (colour)	37 ppm	Power consumption (sleep)	1.2 W
Input colour depth	24 bit	Power consumption (off)	0.08 W
Greyscale levels	256	Energy Star Typical Electricity Consumption (TEC)	0.463 kWh/week
Scan drivers	TWAIN	AC input voltage	110 - 240 V
Fax		AC input frequency	50/60 Hz
Faxing *	Mono faxing	Brand-specific features	
Fax resolution (black)	300 x 300 DPI	HP Auto-On/Auto-Off	✓
Fax transmission speed	3 sec/page		(ABT) 193905205448; (ABY) 193905205455; (ACQ) 193905205462; (B13) 193905418831; (B19) 193905205479; (BAZ) 193905205486
Modem speed	33.6 Kbit/s	HP GTIN (EAN/UPC) with options	193905205448, 193905205455, 193905205462, 193905418831, 193905205479, 193905205486
Auto-redialing	✓	HP GTIN (EAN/UPC)	193905205448, 193905205455, 193905205462, 193905418831, 193905205479, 193905205486
Speed dialling	✓	System requirements	
Fax forwarding	✓	Windows operating systems supported	Windows 8, Windows 7, Windows 11, Windows 8.1, Windows 10
Fax delayed sending	✗	Mac operating systems supported	Mac OS X 10.14 Mojave, Mac OS X 10.13 High Sierra, Mac OS X 10.15 Catalina, Mac OS X 10.12 Sierra
Auto reduction	✓	Other operating systems supported	iOS, Android
Features		Operational conditions	
Recommended duty cycle	900 - 4800 pages per month	Operating relative humidity (H-H)	10 - 90%
Maximum duty cycle *	100000 pages per month	Recommended humidity operating range	30 - 70%
Duplex functions *	Print, Copy, Scan	Storage temperature (T-T)	-20 - 40 °C
Digital sender	✓	Operating temperature (T-T)	15 - 32.5 °C
Number of print cartridges *	1	Certificates	
Printing colours *	Black	Certification	CISPR 22:2008 (International) Class A, CISPR 32:2012 (International)/ EN 55032:2012, CISPR 35:2016 (International)/ EN 55035:2017, EN 55024:2010 +A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, FCC CFR 47 Part 15 Class A, ICES-003, Issue 6 Class A. Other EMC approvals as required by individual countries.
Page description languages	PCL 5, PCL 6, PDF 1.7, PostScript 3	Sustainability	
Printer fonts	PostScript, Scalable, TrueType, Windows	Sustainability compliance	✓
All-In-One-multitasking	✓	Sustainability certificates	Blue Angel, ENERGY STAR, EPEAT Silver
Country of origin	China, Mexico	Sustainable technologies and materials	Mercury-free
Replacement cartridges	Declared yields based on ISO/IEC 19752 and continuous printing. Actual yields vary considerably based on images printed and other factors	Doesn't contain	Mercury
HP segment	Business	Weight & dimensions	
Input & output capacity		Width	420 mm
Total number of input trays *	2	Depth	390 mm
Total input capacity *	350 sheets	Height	323 mm
Total output capacity *	150 sheets	Weight	13 kg
Paper tray 1 input capacity	100 sheets	Packaging data	
Paper tray 2 input capacity	250 sheets	Package width	497 mm
Auto document feeder (ADF)	✓	Package depth	398 mm
Auto document feeder (ADF) input capacity	50 sheets	Package height	490 mm
Maximum number of input trays	3	Package weight	14.7 kg
Maximum input capacity	10 sheets	Paper handling	
Maximum output capacity	150 sheets	Maximum ISO A-series paper size *	A4
Paper handling		Maximum print size	212 x 352 mm
Maximum ISO A-series paper size *	A4	Paper tray media types *	Bond paper, Envelopes, Heavy paper, Labels, Letterhead, Plain paper, Pre-printed, Recycled paper, Rough paper, Thick paper
Maximum print size	212 x 352 mm	ISO A-series sizes (A0...A9) *	A4, A5, A6
Paper tray media types *	Bond paper, Envelopes, Heavy paper, Labels, Letterhead, Plain paper, Pre-printed, Recycled paper, Rough paper, Thick paper	ISO B-series sizes (B0...B9)	B5
ISO A-series sizes (A0...A9) *	A4, A5, A6	ISO C-series sizes (C0...C9)	C5, C6
ISO B-series sizes (B0...B9)	B5	Non-ISO print media sizes	16K
ISO C-series sizes (C0...C9)	C5, C6	JIS B-series sizes (B0...B9)	B5, B6
Non-ISO print media sizes	16K	Envelopes sizes	B5, C5, C6, DL
JIS B-series sizes (B0...B9)	B5, B6		
Envelopes sizes	B5, C5, C6, DL		


Paper handling		Packaging content	
Photo paper sizes	10x15 cm	Cartridge(s) included	✓
Custom media width	76 - 216 mm	Included cartridge capacity (black)	3000 pages
Custom media length	127 - 356 mm	Cables included	AC
Paper tray media weight	60 - 200 g/m ²	Logistics data	
Multi-Purpose Tray media weight	60 - 120 g/m ²	Pallet gross weight	441.92 g
Ports & interfaces		Layers per pallet	4 pc(s)
Direct printing *	✗	Products per pallet	24 pc(s)
USB port	✓	Technical details	
USB 2.0 ports quantity	3	Master (outer) cases per pallet layer	6 pc(s)
Network		Other features	
Wi-Fi *	✗	Number of users	10 user(s)
Ethernet LAN *	✓	Pallet dimensions (W x D x H)	1200 x 1000 x 2451 mm
		Recommended system requirements	2 GB available hard disk space Internet connection or USB port Internet browser.
		Pallet dimensions (W x D x H) (imperial)	1199.9 x 1000 x 2450.8 mm (47.2 x 39.4 x 96.5")
		Pallet weight (imperial)	441.9 kg (974.3 lbs)



0193905711765




193905711765

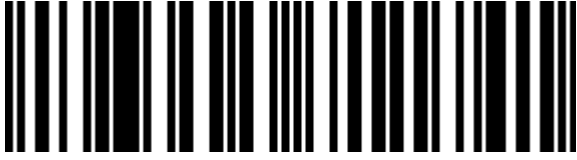

0193905711741




193905711741

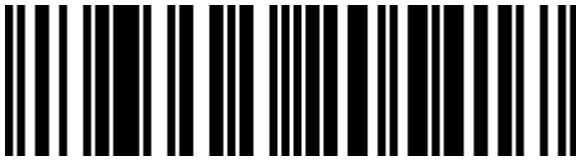

0193905205417



193905205417

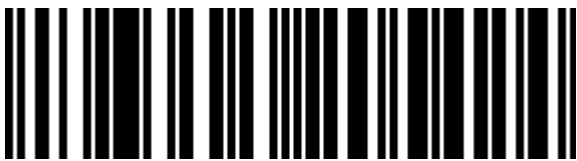

0193905205424




193905205424



0193905205486



193905205486

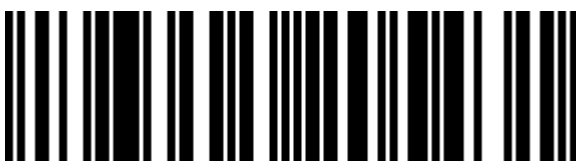

0193905205431



193905205431



0193905205455




193905205455



0193905205493




193905205493

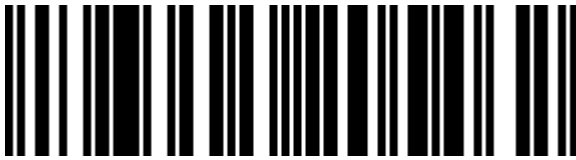

0193905205462



193905205462

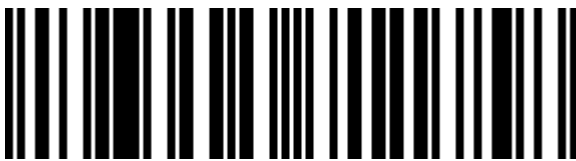

0193905711758



193905711758



0195122905293




195122905293



0193905205448



193905205448

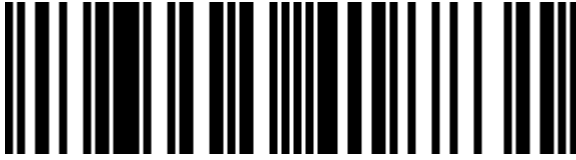

0193905418831



193905418831



0193905205479



193905205479

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.