



## HP color LaserJet 4600dn printer Colour 600 x 600 DPI A4 Wi-Fi

Brand : HP

Product code: C9661A

Product name : color LaserJet 4600dn printer

hp color LaserJet 4600dn printer

[HP color LaserJet 4600dn printer Colour 600 x 600 DPI A4 Wi-Fi:](#)

The HP Color LaserJet 4600 series is a simple, reliable, affordable way to add high-quality, high-speed colour laser printing to your business.

HP color LaserJet 4600dn printer. Print technology: Laser, Colour. Number of print cartridges: 4, Maximum duty cycle: 85000 pages per month. Maximum resolution: 600 x 600 DPI. Maximum ISO A-series paper size: A4. Print speed (black, normal quality, A4/US Letter): 16 ppm, Duplex printing. Network ready, Wi-Fi. Product colour: Grey



<b>Printing</b>		<b>Weight &amp; dimensions</b>	
Print speed (colour, normal quality, A4/US Letter)	16 ppm	Maximum dimensions (W x D x H)	480 x 548 x 578 mm
Colour *	✓	Weight	40.5 kg
Print technology *	Laser	<b>Packaging data</b>	
Duplex printing *	✓	Package width	798 mm
Maximum resolution *	600 x 600 DPI	Package depth	645 mm
Print speed (black, normal quality, A4/US Letter) *	16 ppm	Package height	820 mm
Warm-up time	120 s	Package weight	60 kg
Time to first page (black, normal)	17.5 s	<b>Packaging content</b>	
<b>Features</b>		Drivers included	✓
Maximum duty cycle *	85000 pages per month	Manual	✓
Printing colours *	Black, Cyan, Magenta, Yellow	Cables included	AC
Number of print cartridges *	4	<b>Other features</b>	
<b>Input &amp; output capacity</b>		Non-operating relative humidity (non-condensing)	10 - 85%
Total input capacity *	600 sheets	Recommended operating temperature range (T-T)	17 - 25 °C
Total output capacity *	250 sheets	Mac compatibility	✓
Paper tray 2 input capacity	500 sheets	I/O ports	1 x IEEE 1284 1 x FIR
Paper input type	Paper tray	Input capacity for envelopes (primary tray)	20 sheets
Maximum input capacity	1100 sheets	Standard media sizes	A4, Letter, Legal, Executive, B5 (JIS), A5
Maximum output capacity	250 sheets	Print margin bottom (A4)	5 mm
<b>Paper handling</b>		Print margin left (A4)	5 mm
Maximum ISO A-series paper size *	A4	Print margin right (A4)	5 mm

Paper handling		Other features	
Paper tray media types *	Card stock, Envelopes, Glossy paper, Labels, Plain paper, Recycled paper, Transparencies	Print margin top (A4)	5 mm
Media types supported	Paper (plain, recycled, glossy), glossy film, envelopes, transparencies, labels, cardstock	Typefaces	80 TrueType
		Media weights by paper path	60 g/m <sup>2</sup> - 163 g/m <sup>2</sup> ; 60 g/m <sup>2</sup> - 105 g/m <sup>2</sup> ; 75 g/m <sup>2</sup> - 105 g/m <sup>2</sup>
		Recommended media weight	75 g/m <sup>2</sup>
		Maximum input capacity for envelopes	20
Network		Printer management	HP Web Jetadmin, HP embedded web server, HP Printer Status & Alerts
Network ready	✓	Acoustic power emissions	6.5 B(A)
Wi-Fi *	✓	Acoustic pressure emissions	51 dB
Ethernet LAN *	✗	Power requirements	100 - 127V / 220 - 240V, 50/60 Hz (+/- 2 Hz)
Wi-Fi standards	802.11b	Print quality (colour, best quality)	600 DPI
Performance		Duty cycle letter size (maximum)	85000 pages per month
Internal memory *	96 MB	Print speed (colour, full-page colour, normal quality, A4)	16 ppm
Maximum internal memory	416 MB	Print speed (colour, best quality, A4)	16 ppm
Card reader integrated	✗	Print speed (black, best quality, A4)	16 ppm
Built-in processor	✓	Compatibility	CE, CISPR 22/EN 55022 class B; EN 55024; EN 61000-3-2; EN 61000-3-3 FCC Title 47 CFR; Part 15 class B /ICES-003, Ed. 3; AS /NZS; EPA ENERGY STAR-compatible; TÜV-GS; UL/cUL; IEC 60950/EN 60950; IEC 60825-1/EN 60825-1
Processor model	RISC	Standard input trays	2
Processor frequency	400 MHz	Print quality (black, best quality)	600 x 600 DPI
Noise level (idle)	51 dB	Wireless technology	IEEE 802.11b, IrDA, Bluetooth
Design		Duplex supported media size	A4, Letter, Legal, Executive, JIS B5
Product colour *	Grey	Maximum paper trays	3
System requirements		Compatible operating systems	Microsoft Windows (3.1x, 95, 98, Me, NT 4.0, 2000, XP), Mac OS (8.6 +), OS/2, Unix, Linux; DOS
Windows operating systems supported	Windows 2000, Windows 2000 Professional, Windows 3.x, Windows 95, Windows 98, Windows 98SE, Windows ME, Windows NT, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	Package dimensions (WxDxH)	798 x 645 x 820 mm
Mac operating systems supported	Mac OS 8.6, Mac OS 9.0, Mac OS 9.1, Mac OS 9.2, Mac OS X 10.1 Puma, Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.3 Panther, Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks		
Linux operating systems supported	✓		
Minimum system requirements for Macintosh	.		
Operational conditions			
Operating temperature (T-T)	10 - 30 °C		
Storage temperature (T-T)	0 - 35 °C		
Operating relative humidity (H-H)	10 - 80%		
Operating altitude	0 - 2600 m		



0808736061322



808736061322



0808736061469



808736061469



0808736061452



808736061452



0808736061483



808736061483



0808736061490



808736061490



0808736061506



808736061506



0808736061513



808736061513




0808736061520



808736061520



0808736061537



808736061537



0808736061544



808736061544



0808736061551



808736061551



0808736061568



808736061568



0808736061575



808736061575




0808736061582



808736061582



0808736061599



808736061599



0808736061193



808736061193



0808736235587



808736235587



0808736235594



808736235594



0808736061209



808736061209



0808736061216



808736061216



0808736061223



808736061223



0808736061230



808736061230



0808736061247



808736061247



0808736061254



808736061254



0808736061261



808736061261




0808736061278



808736061278



0808736061285



808736061285



0808736061292



808736061292



0808736061308



808736061308



0808736061315



808736061315



0808736061339




808736061339



0808736061346



808736061346

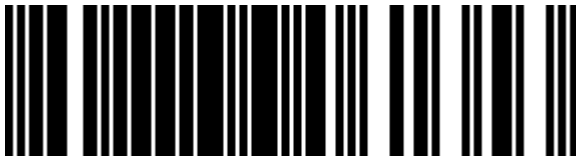


0808736061353



808736061353



0808736061360



808736061360



0808736061377



808736061377



0808736061384



808736061384



0808736061391



808736061391




0808736061407



808736061407



0808736061414



808736061414



0808736061421



808736061421



0808736061438



808736061438



0808736061445



808736061445



0808736061476



808736061476

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.