



HP OfficeJet E709n Thermal inkjet A4 4800 x 1200 DPI 13 ppm Wi-Fi

Brand : HP

Product family: OfficeJet

Product code: CB057A

Product name : E709n



Officejet 6500 Wireless All-in-One Printer, Thermal Inkjet, 13ppm, A4, 192MHz, 64MB, LCD

HP OfficeJet E709n Thermal inkjet A4 4800 x 1200 DPI 13 ppm Wi-Fi:

Professional colour for up to 40% less cpp and energy use than lasers, speeds equivalent to a laser printer with up to 7 ppm black / 7 ppm colour, print/copy at up to 32 ppm black / 31 ppm colour, 4 individual HP OfficeJet Ink cartridges, wireless and Ethernet networking, duplex printing, 35-page one-sided ADF, digital solutions including scan-to-computer and fax to PC/Mac, ENERGY STAR®, HP Smart Web Printing

HP OfficeJet E709n. Print technology: Thermal inkjet, Printing: Colour printing, Maximum resolution: 4800 x 1200 DPI, Print speed (colour, normal quality, A4/US Letter): 10 ppm. Copying: Colour copying, Maximum copy resolution: 4800 x 1200 DPI. Scanning: Colour scanning, Optical scanning resolution: 2400 x 2400 DPI. Faxing: Colour faxing. Maximum ISO A-series paper size: A4. Wi-Fi. Direct printing. Product colour: Black, White



Printing		Paper handling	
Print technology *	Thermal inkjet	Non-ISO print media sizes	Executive, Statement
Printing *	Colour printing	JIS B-series sizes (B0...B9)	B5
Duplex printing *	✓	Envelopes sizes	C6
Maximum resolution *	4800 x 1200 DPI	Photo paper sizes (imperial)	4x6,5x7,8x10
Print speed (black, normal quality, A4/US Letter) *	13 ppm	Custom media width	76 - 216 mm
Print speed (colour, normal quality, A4/US Letter)	10 ppm	Custom media length	102 - 762 mm
Print speed (black, draft quality, A4/US Letter)	32 ppm	Envelope feeder	✗
Print speed (colour, draft quality, A4/US Letter)	31 ppm	Maximum input capacity for cards	80
Time to first page (black, normal)	20 s	Ports & interfaces	
Time to first page (colour, normal)	21 s	Standard interfaces	Ethernet, USB 2.0, Wireless LAN
Copying		Direct printing *	✓
Copying *	Colour copying	USB port	✓
Maximum copy resolution *	4800 x 1200 DPI	USB 2.0 ports quantity	1
Copy speed (black, normal quality, A4)	32 cpm	Network	
Copy speed (colour, normal quality, A4)	31 cpm	Wi-Fi *	✓
Maximum number of copies	100 copies	Ethernet LAN *	✓
Copier resize	25 - 400%	Performance	
Maximum copy speed (black, A4)	32 cpm	Maximum internal memory	64 MB
Maximum copy speed (colour, A4)	31 cpm	Card reader integrated	✓
Scanning		Internal memory *	64 MB
Scanning *	Colour scanning	Compatible memory cards	Memory Stick (MS), miniSD, MMC, MMCmicro, MS Duo, MS PRO, MS PRO Duo, SD, SDHC, xD
Optical scanning resolution *	2400 x 2400 DPI	Processor frequency	192 MHz
Maximum scan resolution	19200 x 19200 DPI	Mac compatibility	✓
Maximum scan area	Legal (216 x 356)	Minimum system requirements	IE 6.0+
Scanner type *	Flatbed & ADF scanner	Design	
Scan technology	CIS	Product colour *	Black, White
Input colour depth	48 bit	Market positioning *	Home & office
Greyscale levels	256	Built-in display *	✓
Fax		Display	LCD
Faxing *	Colour faxing	Display number of lines	2 lines

Fax		Power	
Fax resolution (black)	300 x 300 DPI	Power consumption (average operating)	50 W
Fax transmission speed	3 sec/page	Power consumption (PowerSave)	6.5 W
Modem speed	33.6 Kbit/s	Power consumption (standby)	7.1 W
Fax memory	100 pages	Power consumption (off)	0.6 W
Auto-redialing	✓	AC input frequency	50 - 60 Hz
Fax speed dialing (max numbers)	100	System requirements	
Fax forwarding	✓	Windows operating systems supported	Windows 2000, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Fax broadcasting	48 locations	Mac operating systems supported	Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard
Fax delayed sending	✓	Minimum RAM	128 MB
Auto reduction	✓	Minimum storage drive space	200 MB
Distinctive ring	✓	Minimum processor	Intel Pentium II/Celeron
Features		Operational conditions	
Recommended duty cycle	800	Operating relative humidity (H-H)	20 - 90%
Maximum duty cycle *	7000 pages per month	Recommended humidity operating range	25 - 80%
Digital sender	✗	Recommended operating temperature range (T-T)	15 - 32 °C
Number of print cartridges *	4	Storage temperature (T-T)	-40 - 60 °C
Printing colours *	Black, Cyan, Magenta, Yellow	Operating temperature (T-T)	5 - 40 °C
Page description languages	PCL 3	Sustainability	
Input & output capacity		Sustainability certificates	ENERGY STAR
Total input capacity *	250 sheets	Weight & dimensions	
Total output capacity *	50 sheets	Width	476 mm
Auto document feeder (ADF)	✓	Depth	473 mm
Auto document feeder (ADF) input capacity	35 sheets	Height	258 mm
Maximum input capacity for envelopes	30	Weight	7.8 kg
Maximum input capacity for transparencies	50 sheets	Packaging data	
Maximum input capacity for 10 x 15 cm photographs	80 sheets	Package width	568 mm
Standard output capacity for envelopes	15 sheets	Package depth	333 mm
Standard output capacity for cards	25	Package height	534 mm
Paper handling		Package weight	13.1 kg
Maximum ISO A-series paper size *	A4	Other features	
Maximum print size	216 x 356 mm	Dimensions (WxDxH)	476 x 410 x 258 mm
Paper tray media types *	Card stock, Envelopes, Labels, Photo paper, Plain paper	Acoustic power emissions	6.8B(A)
ISO A-series sizes (A0...A9) *	A4, A5, A6	Acoustic pressure emissions	55 dB
ISO B-series sizes (B0...B9)	B5, B6	Power requirements	100 - 240V
		Minimum system requirements for Macintosh	Power PC G3/G4/G5, Intel Core 256MB RAM 500MB HDD
		Compatible operating systems	Windows 7 Windows Vista (32/64-bit) Windows XP Professional SP1 (32/64-bit) Windows XP Home SP1 (32/64-bit) Windows 2000 SP4 Windows Foundation Server 2008 Windows Small Business Server 2008 Standard Mac OS X v10.4, v10.5, v10.6 Linux
		Automatic paper sensor	✓
		All-in-one functions	Copy, Fax, Print, Scan
		Colour all-in-one functions	Copy, Fax, Print, Scan



0884420425137




884420425137



8844206172978



0884420425144




884420425144



0884420617297




884420617297

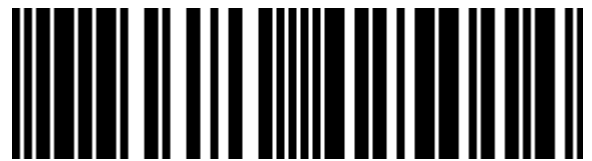

0884420425014



884420425014

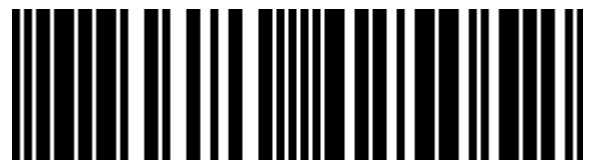

0884420425052



884420425052




0884420478942



884420478942




0884420425083




884420425083



0884420425076



884420425076

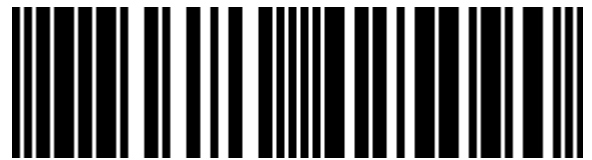

0884420425090



884420425090



0884420425045



884420425045



0884420425069



884420425069



0884420425021




884420425021



0884420425038



884420425038

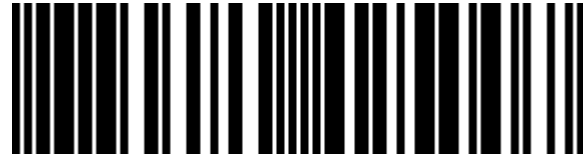


0884420425007



884420425007



0884420478959



884420478959



0884420713975



884420713975



0884420713982



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.