



# HP LaserJet P2015dn Printer 1200 x 1200 DPI

Brand : HP

Product family: LaserJet

Product code: CB368A

Product name : LaserJet P2015dn Printer



This compact, black-and-white LaserJet printer lets workteams produce professional-quality documents at true 1200 dpi, on demand. Fast enough at 26 ppm to keep up with your business's growing printing needs, it's also easy to set up and use.

## HP LaserJet P2015dn Printer 1200 x 1200 DPI:

This compact, black-and-white LaserJet printer produces professional-quality documents at true 1200 dpi. Workteam productivity improves with fast print speeds of 26ppm and Instant-on technology ensures no wait for a first printed page. Its high performance features include integrated networking [p1] for easy sharing, a fast 400 MHz processor and expandable memory up to 288 MB. Simple to set up, use and manage, it delivers outstanding results with original HP LaserJet print cartridges.



ABU - United Kingdom - UK English localization

| Printing  |   | Other features                              |   |
|---|---|---|---|
| Print speed (black, draft quality, A4/US Letter)    | 26, 27  |   |   |
| Colour *  | ✗   |   |   |
| Duplex printing *                                   | ✓   | Minimum system requirements                 | Microsoft Windows 2000, XP Home, XP Professional: 333 MHz processor, 64 MB RAM; Windows Server 2003: 550 MHz processor, 128 MB RAM; 200 MB available hard disk space (all systems); 1 GHz processor, 512 MB RAM (Windows Vista Ready, check user guide for minimum hard drive space)                        |
| Maximum resolution *                                | 1200 x 1200 DPI   |   |   |
| Print speed (black, normal quality, A4/US Letter) * | 26 ppm  |   |   |
| Time to first page (black, normal)                  | 8.5 s   | Envelope feeder                             | ✗   |
| Economical printing                                 | ✓   | Printer management                          | HP toolbox, HP Embedded Web Server, HP Web Jetadmin   |
| <b>Features</b>                                     |   | Acoustic power emissions                    | 6.4 B(A)  |
| Maximum duty cycle *                                | 15000 pages per month   | Acoustic pressure emissions                 | 50 dB   |
| Number of print cartridges *                        | 1   | Power requirements                          | 110 - 127 / 220 - 240 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz)  |
| <b>Input &amp; output capacity</b>                  |   | Duplex print options                        | Automatic (standard)  |
| Total input capacity *                              | 300 sheets  | Print speed (black, best quality, A4)       | 26 ppm  |
| Total output capacity *                             | 150 sheets  |   |   |
| Maximum input capacity                              | 550 sheets  |   |   |
| Maximum output capacity                             | 150 sheets  |   |   |
| <b>Paper handling</b>                               |   | Electromagnetic compatibility               | CISPR 22:1993+A1+A2/EN 55022:1994+A1+A2 Class B, EN 61000-3-2:2000, EN 61000-3-3:1995+A1, EN 55024:1998+A1+A2 FCC Title 47 CFR, Part 15 Class B (USA), ICES-003, Issue 4, (Canada), GB9254-1998, EMC Directive 89/336/EEC with CE Marking (Europe) other EMC approvals as required by individual countries. |
| Maximum print size                                  | 203.2 x 347 mm  |   |   |
| Duplex media weight                                 | 60 - 105 g/m <sup>2</sup>   |   |   |
| Media types supported                               | Paper (bond, light, heavy, plain, recycled, rough), envelopes, labels, cardstock, transparencies, heavy media | Standard input trays                        | 2   |
| Media size (tray 1)                                 | A4, A5, A6, B5, B6, C5, DL, 76 x 127 - 216 x 356 mm   | Networking features                         | Ethernet, Fast Ethernet   |
| Media weight (tray 1)                               | 60 - 163 g/m <sup>2</sup>   | Print quality (black, best quality)         | 1200 x 1200 DPI   |
| <b>Network</b>                                      |   | Standard output capacity for transparencies | 75 sheets   |
| Network ready                                       | ✓   |   |   |
| Supported network protocols (IPv4)                  | Via HP Jetdirect print servers: TCP/IP  | Driver updates                              | Latest drivers and software available from the HP LaserJet support Web site at <a href="http://www.hp.com/support/ljp2015/">http://www.hp.com/support/ljp2015/</a> ; In countries/regions other than the US at <a href="http://www.hp.com/">http://www.hp.com/</a>  |
| <b>Performance</b>                                  |   | Duplex supported media size                 | A4  |
| Internal memory *                                   | 32 MB   | Media handling                              | Automatic duplexing, manual feed, sheeffed, straight-through paper path   |
| Maximum internal memory                             | 288 MB  |   |   |
| Built-in processor                                  | ✓   |   |   |
| Processor model                                     | Motorola ColdFire V5  |   |   |
| Processor frequency                                 | 400 MHz   |   |   |

| Power   |   | Other features  |   |
|---|---|---|---|
| Power consumption (PowerSave)                 | 7 W   | Control panel   | 6 lights (Jam, Toner low, Paper out, Attention, Ready, Go), 2 buttons (Go, Cancel)  |
| Power consumption (off)                       | 0.1 W   |   |   |
| System requirements                           |   | Maximum paper trays   | 3   |
| Minimum system requirements for Macintosh     | Mac OS X v10.2.8, 10.3, 10.4 and higher; 128 MB RAM minimum (256 MB recommended), 150 MB available hard disk space  | Media size (tray 2)   | A4, A5, B5, C5, DL, 147 x 211 - 216 x 356 mm  |
| Operational conditions                        |   | Media type and capacity (tray 2)                                    | 250   |
| Operating temperature (T-T)                   | 0 - 45 °C   | Media weight (tray 2)   | 60 - 105 g/m <sup>2</sup>   |
| Storage temperature (T-T)                     | -20 - 60 °C   | Media weight (tray 3)   | 60 - 105 g/m <sup>2</sup>   |
| Operating relative humidity (H-H)             | 15 - 80%  | Paper handling optional/input                                       | 250-sheet input tray  |
| Storage relative humidity (H-H)               | 10 - 80%  | Paper handling standard/input                                       | 250-sheet input tray, 50-sheet multi-purpose tray   |
| Non-operating altitude                        | 9144  | Paper handling standard/output                                      | 125-sheet output bin  |
| Sustainability                                |   | Power consumption (active)  | 350 W   |
| Sustainability certificates                   | ENERGY STAR   |   | IEC 60950-1 (International), EN 60950-1 (EU), IEC 60825-1+A1+A2, UL/cUL Listed (US/Canada), GS License (Europe), EN 60825-1+A1+A2 Class 1, 21 CFR Ch. 1/SubCh. J (Class 1 Laser/LED Device) GB4943-2001, Low Voltage Directive 73/23/EEC with CE Marking (Europe). Other safety approvals as required by individual countries |
| Weight & dimensions                           |   | Safety  |   |
| Maximum dimensions (W x D x H)                | 350 x 450 x 256 mm  |   |   |
| Pallet dimensions (W x D x H)                 | 1200 x 1000 x 2551 mm   |   |   |
| Weight  | 11 kg   |   |   |
| Dimensions (WxDxH)                            | 350 x 362 x 256 mm  |   |   |
| Packaging data                                |   | Security management description                                     | SNMP (community name), password-protected HP Embedded Web Server  |
| Package weight                                | 13.2 kg   | Downloadable software   | Windows drivers, full software solution, printing system  |
| Packaging content                             |   | Compatible operating systems  | Windows 98 SE, 2000, Me, XP Home, XP Professional, XP Professional x64 Edition, Windows Server 2003; Mac OS X v10.2.8, 10.3.9, 10.4.3 +; UNIX; Linux; HP OpenVMS; OS/2, Solaris 2.5x, 2.6, 7, 8 Windows 98 SE, 2000, Me, XP Home, XP Professional, Windows Server 2003; Mac OS X v10.2.8, 10.3.9, 10.4.3                      |
| Bundled software                              | HP printer software on CD-ROM: installer/uninstaller, drivers (HP PCL 6, HP PCL 5e, HP Postscript Level 3 emulation), HP Toolbox FX for diagnostic status and configuration, HP Embedded Web Server, control panel simulator, help, documentation | Package dimensions (W x D x H)                                      | 430 x 330.2 x 480.1 mm (16.9 x 13 x 18.9")  |
| Other features                                |   | Pallet dimensions (W x D x H) (imperial)                            | 1201.4 x 1000.8 x 2550.2 mm (47.3 x 39.4 x 100.4")  |
| Additional paper trays                        | Optional input tray   | Product dimensions when open (LxWxD)                                | 35 cm (13.8")   |
| Standard input capacity for transparencies    | 75  | Weight (imperial)   | Without toner cartridge 24.3 lb   |
| Recommended operating temperature range (T-T) | 15 - 32.5 °C  | Acoustic pressure emissions bystander (active, print, copy or scan) | 50 dB(A)  |
| Mac compatibility                             | ✓   | Duplex binding  | ✗   |
| I/O ports                                     | 1 x USB 2.0   | First page out (black&white, A4, ready)                             | 8.5 s   |
| Custom media sizes                            | 76 x 127 - 216 x 356 mm; 147 x 211 - 216 x 356 mm   | First page out (black&white, letter, ready)                         | 8.5 s   |
| Standard media sizes                          | A4, A5, A6, B5, B6, C5, DL  | First page out (black&white, letter, sleep)                         | 8.5 s   |
| Memory upgrade                                | 0.288 GB  | Media sizes supported (imperial)                                    | Letter, legal, executive, index cards, envelopes (No. 10, Monarch)  |
| Print margin bottom (A4)                      | 4 mm  | Operating altitude (imperial)                                       | 13000 ft  |
| Print margin left (A4)                        | 4 mm  | Package weight (imperial)   | 13.2 kg (29 lbs)  |
| Print margin right (A4)                       | 4 mm  | Print speed (black, best quality, letter)                           | Up to 27 ppm  |
| Print margin top (A4)                         | 4 mm  | Size (imperial)   | 35 cm (13.8")   |
| Typefaces                                     | 45 TrueType, 35 PostScript  | Standard input capacity for envelopes                               | 10 sheets   |
| Media weights by paper path                   | 60 - 163 g/m <sup>2</sup>   | Acoustic power emissions (ready)                                    | Inaudible   |
| Standard output capacity for envelopes        | 10 sheets   | Acoustic pressure emissions bystander (ready)                       | Inaudible   |
|   |   | Maximum input capacity (tray 1)                                     | 50 sheets   |
|   |   | SureSupply connection type  | Direct and Network  |
|   |   | SureSupply supported  | ✓   |

#### Other features

|  |                    |
|--|--------------------|
| Typical electricity consumption (TEC) number | 1.816 kWh/Week     |
| Dimension note (imperial)                    | With Tray 1 open   |
| Dimension note (metric)                      | With Tray 1 open   |
| Recommended media weight (duplex, imperial)  | 16 to 28 lb        |
| UNSPSC-code                                  | 43212105           |
| Package dimensions (WxDxH)                   | 430 x 330 x 480 mm |



0882780492394



882780492394



0882780492462



882780492462



0638170284519



638170284519



0808736898966



808736898966



0882780492622



882780492622



0883585106677



883585106677



0883585106684



883585106684



0882780493230



882780493230



0882780493247



882780493247



0884420021889



884420021889



0882780493254



882780493254



0882780493261



882780493261



0882780493278



882780493278



0882780493285




882780493285



0882780492400




882780492400

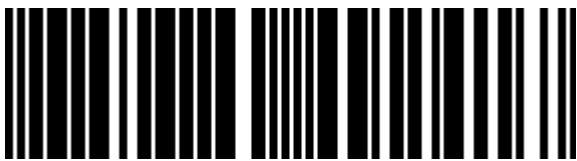

0882780492417



882780492417

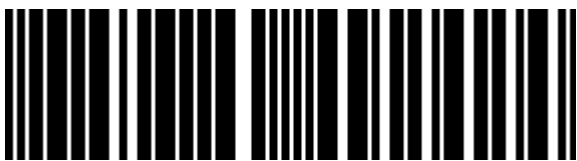

0882780492424



882780492424



0882780492431



882780492431



0882780492448



882780492448



0882780492455



882780492455



0882780492479



882780492479



0882780492486



882780492486



0882780492493



882780492493



0882780492509



882780492509



0882780492516



882780492516



0882780492523



882780492523



0882780492530



882780492530



0882780492547



882780492547



0882780492554



882780492554



0882780492561



882780492561



0882780492578



882780492578



0882780492585



882780492585



0882780492592



882780492592



0882780492608



882780492608



0882780492615



882780492615

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.