



HP LaserJet M2727nf Laser A4 1200 x 1200 DPI 26 ppm

Brand : HP

Product family: LaserJet

Product code: CB532A

Product name : M2727nf

LaserJet M2727nf, 64MB, 26ppm, A4, USB 2.0

HP LaserJet M2727nf Laser A4 1200 x 1200 DPI 26 ppm:

If it's power and functionality you want, then this HP MFP is the device for you. Fast speeds, consistently great print quality, value-featured networking, a new fax solution, and a host of additional features mean serious improvements in user productivity.

HP LaserJet M2727nf. Print technology: Laser, Maximum resolution: 1200 x 1200 DPI. Copying: Mono copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 1200 x 1200 DPI. Faxing: Colour faxing. Maximum ISO A-series paper size: A4. Product colour: Black, Grey



Printing		Operational conditions	
Print technology *	Laser	Recommended operating temperature range (T-T)	15 - 32.5 °C
Printing *	✗	Storage temperature (T-T)	-20 - 40 °C
Duplex printing *	✓	Operating temperature (T-T)	15 - 32.5 °C
Maximum resolution *	1200 x 1200 DPI	Storage relative humidity (H-H)	0 - 95%
Print speed (black, normal quality, A4/US Letter) *	26 ppm	Operating temperature (T-T)	59 - 90.5 °F
Print speed (black, draft quality, A4/US Letter)	26 ppm	Operating altitude (imperial)	Up to 10,000 ft
Warm-up time	38 s	Sustainability	
Time to first page (black, normal)	10 s	Sustainability certificates	ENERGY STAR
Economical printing	✓	Weight & dimensions	
Print speed (black, best quality, A4)	8 ppm	Width	500 mm
Print speed (black, best quality, letter)	< 8 ppm	Depth	406 mm
		Height	457 mm
		Weight	17.2 kg
Copying		Packaging data	
Copying *	Mono copying	Package width	596 mm
Maximum copy resolution *	600 x 600 DPI	Package depth	496 mm
Time to first copy (letter)	< 8.0 sec	Package height	595 mm
Maximum number of copies	99 copies	Package weight	22 kg
Copier resize	25 - 400%		
Copy resolution (black graphics)	600 x 600 dpi		
Copy resolution (colour text and graphics)	600 DPI		
Left metric copy margin	4 mm		
Right metric copy margin	4 mm		
Top metric copy margin	4 mm		

Copying		Packaging content	
Copier settings	Contrast (lighter/darker), resolution copy quality (text, mixed, film photo and picture), draft quality (on/off), multipage (on/off), reduce/enlarge 25 to 400%, copy collation, number of copies, one or 2-sided copying, tray select, paper size, paper type, restore default.	Bundled software	HP Toolbox FX, HP LaserJet Scan, TWAIN 1.9 or WIA scanner drivers, HP LaserJet Fax, HP Fax Setup Wizard, Readiris PRO text recognition software (not installed with other software, separate installation required), printer drivers (HP PCL 6, HP postscript level 3 emulation), installer/uninstaller, HP Director (Macintosh)
Bottom copy margin	4 mm		
Maximum copy speed (black, A4)	26 cpm		
Copy speed (black, best, letter)	Up to 27 cpm (single sheet on flatbed, multiple copies, ADF copy speed is up to 19 cpm)		
Scanning		Logistics data	
Scanning *	Colour scanning	Pallet gross weight	352 kg
Optical scanning resolution *	1200 x 1200 DPI	Other features	
Maximum scan area	216 x 297 mm	Standard input trays	2
Scanner type *	Flatbed scanner	I/O ports	1 USB, 1 Ethernet, 2 RJ-11 fax ports
Image formats supported	BMP, GIF, PNG	Networking features	Ethernet, Fast Ethernet
Input colour depth	24 bit	Dimensions (WxDxH)	500 x 406 x 457 mm
Greyscale levels	256	Acoustic power emissions	6.4 B(A) (continuous print at 27 ppm)
TWAIN version	1.9	Copier smart software features	Simplex or duplex copies, 1 to 99 multiple copies, Collation, Reduce/Enlarge from 25 to 400% (with page size presets), Fit to page, 2 or 4 pages to 1 page, Contrast (lighter/darker), Resolution (copy quality), Draft mode, Tray select
Scan input modes	Front control panel scan, Copy or Fax buttons, scanning via HP LaserJet Scan (Windows), HP Director (Macintosh) or TWAIN-compliant or WIA-compliant software	Custom media sizes	Tray 1: 76 x 127 to 216 x 356 mm; Tray 2: 148 x 210 to 216 x 356 mm; Automatic document feeder: 127 x 127 to 216 x 381 mm Tray 1: 3.0 x 5.0 to 8.5 x 14.0 in; Tray 2: 5.8 x 8.3 to 8.5 x 14.0 in; Automatic document feeder: 5.5 x 5 to 8.5 x 14.0 in
Scanner features	Instant on scanner, device front control panel with Scan-to-folder and e-mail options for direct walk-up scan capability (pre-configuration of walk-up capability required via software provided); software; 50-page automatic document feeder.	Duplex print options	Automatic (standard)
Scan speed (black, normal quality)	Up to 3 ppm	Media weights by paper path	Tray 1, output bin: 60 to 163 g/m ² ; Tray 2: 60 to 120 g/m ² ; automatic document feeder (ADF): 60 to 90 g/m ²
Scan speed (colour, normal quality)	Up to 3 ppm	Network ready	✓
Minimum scan size	No minimum	Pallet dimensions (W x D x H)	1200 x 1000 x 1925 mm
Fax		Power requirements	110 - 127 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz), 4.5 amp; 220 - 240 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz)
Faxing *	Colour faxing	Print quality (black, draft quality)	1200 DPI
Modem speed	33.6 Kbit/s	Printer management	HP Toolbox FX, HP Web Jetadmin, embedded Web server
Fax memory	600 pages	Standard media sizes	Tray 1: A4, A5, A6, B5 (JIS), C5, DL, 16K, Postcard (JIS), Double Postcard (JIS); Tray2: A5, B5 (JIS), A4; automatic document feeder (ADF): A4, A5
Auto-redialing	✓	Typefaces	45 scalable TrueType, 35 PostScript
Fax speed dialing (max numbers)	120	Modem type	V34, Super G3 fax
Fax forwarding	✓	Media types supported	Paper (bond, color, heavy, letterhead, light, plain, preprinted, prepunched, recycled, rough), envelopes, transparencies, labels, cardstock
Fax broadcasting	119 locations	Minimum system requirements for Macintosh	Mac OS X v10.3, 10.4, 10.5, 10.6; PowerPC G3, G4, G5, or Intel processors; 512 MB RAM; 100 MB available hard disk space; CD-ROM drive; USB or network port
Fax delayed sending	✓	Print quality (black, best quality)	1200 x 1200 DPI
Distinctive ring	✓	Print quality (black, normal quality)	1200 DPI
Features		Print margin bottom (A4)	4 mm
Maximum duty cycle *	15000 pages per month	Print margin left (A4)	4 mm
Digital sender	✗	Print margin right (A4)	4 mm
Number of print cartridges *	1	Print margin top (A4)	4 mm
All-In-One-multitasking	✓		
Input & output capacity			
Total input capacity *	300 sheets		
Total output capacity *	125 sheets		
Maximum input capacity for envelopes	Up to 10 envelopes		
Standard output capacity for envelopes	10 sheets		
Maximum input capacity	300 sheets		
Maximum output capacity	125 sheets		

Paper handling		Other features			
Maximum ISO A-series paper size *	A4	Printer smart software features	Instant on scanner, Automatic duplex and booklet printing, N-up printing, Collation, Watermarks, install printer driver only, Economode for toner savings, accepts a variety of paper sizes and types.		
Paper tray media types *	Bond paper, Card stock, Envelopes, Labels, Plain paper, Recycled paper, Transparencies				
ISO A-series sizes (A0...A9) *	A4, A5, A6				
JIS B-series sizes (B0...B9)	B5				
Auto Document Feeder (ADF) media weight	60 - 90 g/m ²			Standard output capacity for transparencies	10 sheets
Envelope feeder	✗			Driver updates	In US, latest drivers available from HP support Web site at http://support/Ljm2727 ; in other countries/regions, latest drivers available from http://
Recommended media weight	60 - 163 g/m ²				
Media weight (tray 1)	60 - 163 g/m ²				
Additional paper trays	Optional second 250-sheet paper tray			Duplex supported media size	A4
Media handling	Sheetfed			Scan file formats	BMP, GIF, PDF, PNG, TIFF
Maximum paper trays	3	Memory technology	Memory Enhancement technology (MEt)		
Paper handling optional/input	Optional second 250-sheet paper tray	Control panel	2-line LCD text display, alphanumeric buttons, navigational buttons plus 3 LEDs (Setup, left, enter, right, cancel), fax buttons plus 1 LED (start fax, phonebook, volume, resolution, redial, one touch keys, shift), copy buttons plus 2 LEDs (start copy, 2 sided, reduce/enlarge, lighter/darker, collate, quality, paper, number of copies, current settings), 2 scan buttons (start scan, scan to).		
Paper handling standard/input	50-sheet media input tray, 250-sheet media input tray, 50-sheet automatic document feeder				
Paper handling standard/output	125-sheet face-down output bin and straight-thru paper path				
Media type and capacity (tray 2)	Sheets: 250				
Paper handling	50-sheet media input tray, 250-sheet media input tray, 50-sheet Automatic Document Feeder, 125-sheet face-down output bin and straight-thru paper path				
Ports & interfaces		Safety	IEC 60950-1: 2001/EN 60950-1: 2001+A11; IEC 60825-1: 1993+A1: 1997+A2: 2001/EN 60825-1: 1994+A1: 2002+A2: 2001 (Class 1 Laser/LED Product); GB4943-1995		
USB 2.0 ports quantity	1				
Network		Upgrade type	Device firmware upgradability via USB direct connection or 10/100 wired Ethernet network connectivity; RAM upgradable from 128 MB up to 320 MB total via a single 144-pin DIMM slot accepting 64 MB, 128 MB, 256 MB RAM memory modules		
Wi-Fi *	✗				
Ethernet LAN *	✓				
Supported network protocols (IPv4)	TCP/IP: IPv4, IPv6, IP Direct Mode, LPD, SLP, Bonjour, BOOTP/DHCP/AutoIP, WINS, SNMP v1, and HTTP				
Performance		Auto document feeder: supported media types and capacity	sheets: 50		
Internal memory *	64 MB	Maximum internal memory	320 GB		
Built-in processor	✓	Media weight (tray 2)	60 - 120 g/m ²		
Processor family	NXP ColdFire V5e	Media weight (tray 3)	60 - 120 g/m ²		
Processor frequency	450 MHz	Media size (tray 2)	A5, B5 (JIS), A4; 148 x 210 to 216 x 356 mm		
Mac compatibility	✓	Compatible operating systems	Windows 2000; Windows Server 2003; Windows XP Home; Windows XP Media Center; Windows XP Professional; Windows XP Professional x64; Windows XP Tablet PC; Mac OS X v10.3 +; Novell NetWare 3.2, 4.2, 5.x, 6; HP-UX 10.20, 11.x; RED HAT Linux 6.x a vyšší; SUSE Linux 6.x +; Solaris 2.5x, 2.6, 7, 8, 9, 10 (SPARC); AIX 3.2.5 +; MPE-iX; Citrix MetaFrame; Terminal Services		
Minimum system requirements	Microsoft Windows 7 ready. For more information go to http://go/windows7 . Some features may not be available. Windows Vista (32-bit and 64-bit): 1 GHz processor, 512 MB RAM, check User's Guide for minimum hard disk space; Windows XP-32 Home, XP-32 Professional, XP-x64: any Pentium II processor (Pentium III or higher recommended), 128 MB RAM; Windows Server 2003, 2000 (print driver, scan driver only): any Pentium II processor or higher, 64 MB RAM, for all systems: 250 MB available hard disk space, SVGA 800 x 600 with 16-bit color display, Internet Explorer 5.5 or higher (full install), CD-ROM drive, USB port				
Design		Automatic paper sensor	✗		
		Downloadable software	Installer, print drivers, HP Send Fax, HP Scan software, HP Toolbox FX for management and support, Readiris PRO text recognition software, HP Software Update, HP Web Jetadmin, Enterprise Installer		
Product colour *	Black, Grey	Functions	Print, copy, scan, fax		
Market positioning *	Business	Maximum scan area (imperial)	21.6 cm (8.5")		
Built-in display *	✓	Package dimensions (W x D x H)	596.1 x 496.1 x 595.1 mm (23.5 x 19.5 x 23.4")		
Display	LCD				


Power		Other features	
Power consumption (average operating)	410 W	Pallet dimensions (W x D x H) (imperial)	1219.2 x 1016 x 1924.8 mm (48 x 40 x 75.8")
Power consumption (PowerSave)	15 W	Pallet weight (imperial)	351.3 kg (774.4 lbs)
Power consumption (standby)	13 W	Weight (imperial)	Weight varies as per configuration
Power consumption (off)	0.1 W	Size (imperial)	37.8 lb
System requirements		Acoustic power emissions (active, print, copy or scan)	50 cm (19.7")
Windows operating systems supported	Windows 2000, Windows Vista, Windows XP	Acoustic power emissions (ready)	69 dB
Mac operating systems supported	Mac OS X 10.3 Panther	Acoustic pressure emissions bystander (active, print, copy or scan)	Inaudible
Server operating systems supported	Windows Server 2003	Acoustic pressure emissions bystander (ready)	55.4 B(A) 50.4 dB(A)
Operational conditions		Auto fax reduction supported	Inaudible
Operating relative humidity (H-H)	10 - 80%	Copier scaling (Auto Document Feeder)	✓
		Dimension note (imperial)	25 to 400%
		Dimension note (metric)	Dimensions vary as per configuration
		Duplex binding	Dimensions vary as per configuration
		First page out (black&white, A4, ready)	✗
		First page out (black&white, letter, ready)	10 s
		First page out (black&white, letter, sleep)	10 s
		Handset	✗
		Junk barrier supported	Yes, using CSI field
		Maximum scan area (ADF) (imperial)	215.9 x 355.6 mm (8.5 x 14")
		Media sizes supported (imperial)	Tray 1, output bin: 16 to 43 lb; Tray 2: 16 to 32 lb; automatic document feeder (ADF): 16 to 24 lb
		Minimum scan area (Auto Document Feeder)	127 x 127 mm (5 x 5")
		Minimum scan area	No minimum
		Multi feed detection	✓
		Package weight (imperial)	22 kg (48.4 lbs)
		Product dimensions optional (metric)	500 x 406 x 546 mm (with optional tray)
		SureSupply connection type	Direct and Network
		SureSupply supported	✓
		Typical electricity consumption (TEC) number	3.041 kWh/Week
		UNSPSC-code	43212110
		Security management description	SNMP v1 (community name); control panel, embedded Web server and HP Toolbox FX (password-protected), Kensington lock included with device
		All-in-one functions	Copy, Fax, Scan
		Colour all-in-one functions	Fax, Scan, No
		Package dimensions (WxDxH)	596 x 496 x 595 mm
		Media size (tray 1)	A4, A5, A6, B5 (JIS), C5, DL, 16K, Postcard (JIS), Double Postcard (JIS); 76 x 127 to 216 x 356 mm
		Electromagnetic compatibility	CISPR 22: 2005/EN 55022: 2006-Class B; EN 61000-3-2: 2000+A2; EN 61000-3-3: 1995+A1; EN 55024: 1998+A1+A2; FCC Title 47 CFR, Part 15 Class B 2/ICES-003, Issue 3; GB9254-1998



0883585138036




883585138036

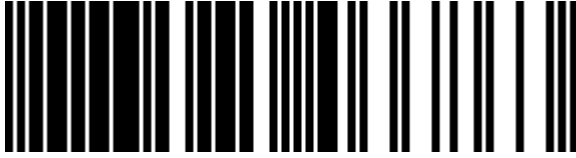


0883585466863



883585466863

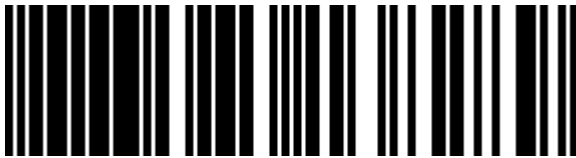

0883585138289



883585138289



0883585138081



883585138081



0883585138302



883585138302



0883585138364



883585138364



0883585138319




883585138319



0883585138159



883585138159

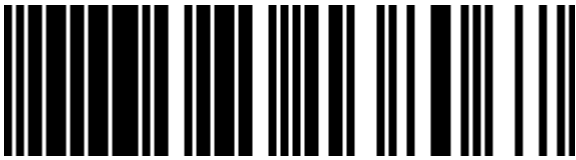

0883585138067




883585138067



0883585138340



883585138340

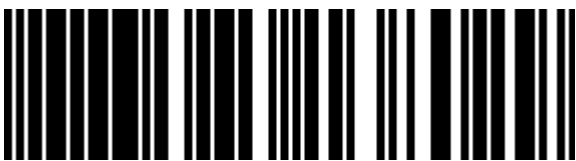

0883585138029



883585138029



0883585138210



883585138210



0883585138098




883585138098




0883585138104



883585138104

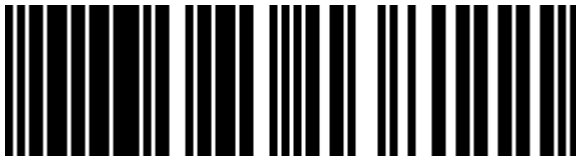

0883585138111



883585138111



0883585138128



883585138128



0883585138135



883585138135



0883585138142



883585138142



0883585138326




883585138326




0883585138166




883585138166

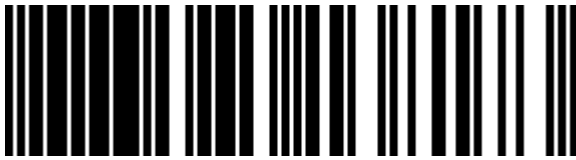

0883585138173



883585138173

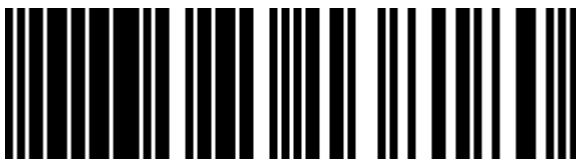

0883585138180



883585138180



0883585138197



883585138197



0883585137954



883585137954



0883585137961




883585137961



0883585137978




883585137978

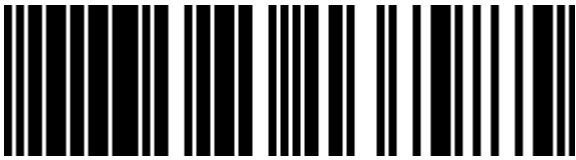

0883585137985




883585137985

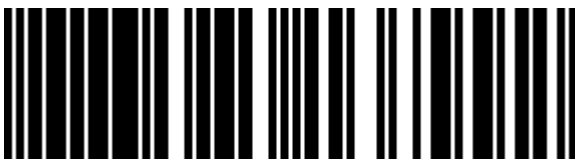

0883585137992



883585137992

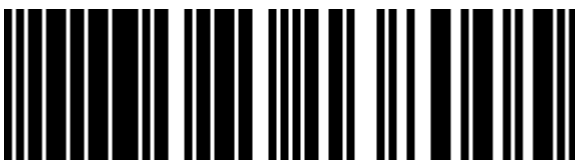

0883585138005



883585138005



0883585138012



883585138012



0883585138043




883585138043



0883585138050




883585138050

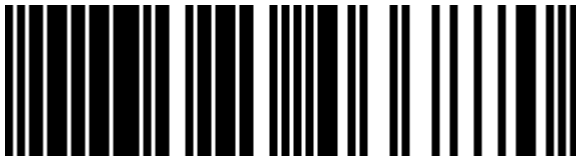

0883585466870




883585466870

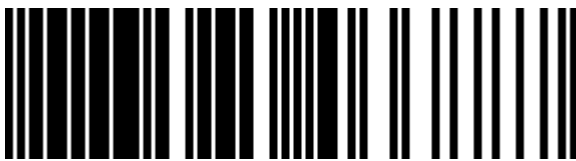

0883585466887



883585466887

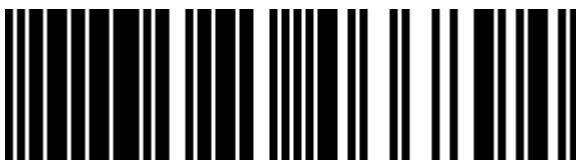

0883585466894



883585466894



0883585466900



883585466900



0883585466917




883585466917



0883585466924




883585466924

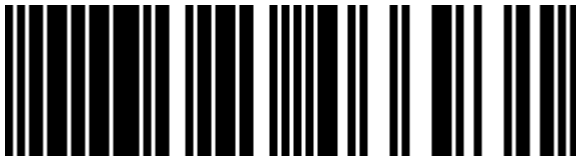

0883585466931




883585466931

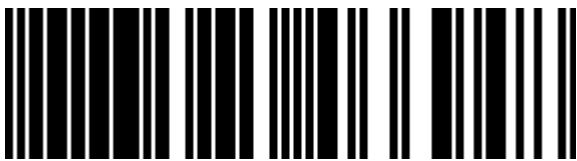

0883585466948



883585466948

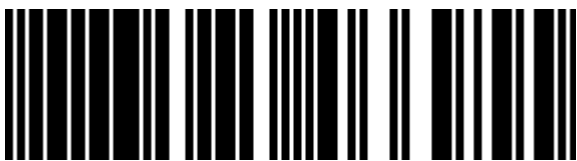

0883585466955



883585466955



0883585515387



883585515387



0883585137930




883585137930




0883585137947



883585137947

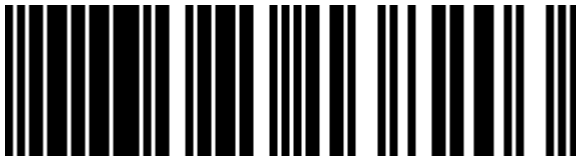

0883585138203



883585138203



0883585138227



883585138227



0883585138234



883585138234



0883585138241



883585138241



0883585138258




883585138258



0883585138265




883585138265

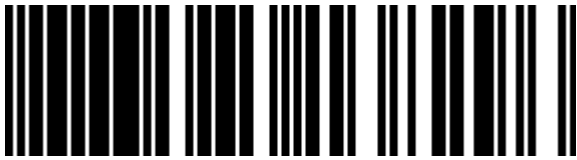

0883585138296



883585138296

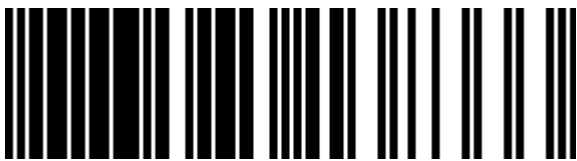

0883585138333



883585138333



0883585138357



883585138357



0883585138272



883585138272



0883585138074



883585138074

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.