



# HP LaserJet Enterprise CM4540fsk Laser A4 600 x 600 DPI 42 ppm

**Brand :** HP

**Product family:** LaserJet

**Product code:** CC421A

**Product name :** Enterprise CM4540fsk



Color LaserJet Enterprise CM4540fsk MFP - 40 ppm, 600 x 600 dpi  
 HP LaserJet Enterprise CM4540fsk. Print technology: Laser, Printing: Colour printing, Maximum resolution: 600 x 600 DPI, Print speed (colour, normal quality, A4/US Letter): 42 ppm. Copying: Colour copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 600 x 600 DPI. Faxing: Mono faxing. Maximum ISO A-series paper size: A4

Printing		Paper handling	
Print technology *	Laser	Envelope feeder	✗
Printing *	Colour printing	Ports & interfaces	
Duplex printing *	✓	Standard interfaces	Ethernet, USB 2.0
Maximum resolution *	600 x 600 DPI	Direct printing *	✗
Print speed (black, normal quality, A4/US Letter) *	42 ppm	USB port	✓
Print speed (colour, normal quality, A4/US Letter)	42 ppm	Network	
Time to first page (black, normal)	12.5 s	Wi-Fi *	✗
Time to first page (colour, normal)	12.5 s	Ethernet LAN *	✓
Copying		Performance	
Copying *	Colour copying	Maximum internal memory	1280 MB
Maximum copy resolution *	600 x 600 DPI	Card reader integrated	✗
Copy speed (black, normal quality, A4)	42 cpm	Internal memory *	1280 MB
Copy speed (colour, normal quality, A4)	42 cpm	Built-in processor	✓
Maximum number of copies	9999 copies	Processor family	Intel
Copier resize	25 - 400%	Processor model	LE80578
		Processor frequency	800 MHz
		Mac compatibility	✓
Scanning		Design	
Scanning *	Colour scanning	Market positioning *	Business
Optical scanning resolution *	600 x 600 DPI	Built-in display *	✓
Maximum scan area	Legal (216 x 356)	Display diagonal	20.3 cm (8")
Scanner type *	Flatbed & ADF scanner	Display resolution	800 x 300 pixels

<b>Scanning</b>		<b>Design</b>	
Scan to	E-mail, FTP, USB	Touchscreen	✓
Scan speed (black)	42 ppm	Control type	Touch
Image formats supported	JPG, TIF	Colour display	✓
Input colour depth	30 bit	<b>Power</b>	
Greyscale levels	256	Power consumption (average operating)	780 W
<b>Fax</b>		Power consumption (PowerSave)	21.5 W
Faxing *	Mono faxing	Power consumption (standby)	91 W
Fax resolution (black)	300 x 300 DPI	Power consumption (off)	0.3 W
Fax transmission speed	6 sec/page	AC input voltage	110 V
Auto-redialing	✓	AC input frequency	60 Hz
Fax speed dialing (max numbers)	100	<b>System requirements</b>	
Fax forwarding	✓	Mac operating systems supported	Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard
Fax broadcasting	100 locations	Server operating systems supported	Windows Server 2003, Windows Server 2003 x64, Windows Server 2008, Windows Server 2008 x64
Fax delayed sending	✗	Minimum storage drive space	220 MB
Auto reduction	✓	<b>Operational conditions</b>	
Distinctive ring	✗	Operating relative humidity (H-H)	10 - 80%
<b>Features</b>		Recommended humidity operating range	30 - 70%
Recommended duty cycle	9000	Recommended operating temperature range (T-T)	15 - 27 °C
Maximum duty cycle *	175000 pages per month	Storage temperature (T-T)	0 - 35 °C
Digital sender	✓	Operating temperature (T-T)	10 - 30 °C
Number of print cartridges *	4	Storage relative humidity (H-H)	10 - 90%
Page description languages	PCL 5c, PCL 6, PDF 1.4, PostScript 3	<b>Certificates</b>	
All-In-One-multitasking	✓	Certification	CISPR 22, EN, FCC, GB, EMC, IEC
<b>Input &amp; output capacity</b>		<b>Sustainability</b>	
Total number of input trays *	5	Sustainability certificates	ENERGY STAR
Total input capacity *	2000 sheets	<b>Weight &amp; dimensions</b>	
Total output capacity *	900 sheets	Weight	88.6 kg
Multi-Purpose tray	✓	<b>Packaging data</b>	
Multi-Purpose tray input capacity	100 sheets	Package weight	110.2 kg
Auto document feeder (ADF)	✓	<b>Other features</b>	
Auto document feeder (ADF) input capacity	50 sheets	Networking features	Gigabit Ethernet
Maximum input capacity for envelopes	10	Dimensions (WxDxH)	1072 x 668 x 1119 mm
<b>Paper handling</b>		Acoustic power emissions	7.3B(A)
Maximum ISO A-series paper size *	A4	Acoustic pressure emissions	57 dB
Maximum print size	216 x 356 mm	Network ready	✓
Paper tray media types *	Card stock, Envelopes, Glossy paper, Labels, Plain paper, Pre-printed, Recycled paper, Transparencies	Minimum system requirements for Macintosh	150MB HDD
ISO A-series sizes (A0...A9) *	A4, A5, A6	Scan file formats	PDF, TIFF, XPS
ISO C-series sizes (C0...C9)	C5	Compatible operating systems	Windows 7 (32/64-bit) Windows Vista (32/64-bit) Windows XP SP2+ (32/64-bit) Windows Server 2008 (32/64-bit) Windows Server 2008 R2 Windows Server 2003 (32/64-bit) Citrix Novell Mac OS X v10.4+ Linux
Non-ISO print media sizes	Executive, Statement	Automatic paper sensor	✓
JIS B-series sizes (B0...B9)	B5	Junk barrier supported	✓
Envelopes sizes	7 3/4, 9, 10, B5, C5, C6, DL	SureSupply supported	✓
Custom media width	76 - 216 mm	Duplex ADF scanning	✓
Custom media length	210 - 356 mm	All-in-one functions	Copy, Digital sender, Fax, Print, Scan
Paper tray media weight	60 - 216 g/m <sup>2</sup>	Colour all-in-one functions	Copy, Print, Scan
Auto Document Feeder (ADF) media weight	60 - 120 g/m <sup>2</sup>		



0885631014981



885631014981



0885631014967



885631014967



0885631014875



885631014875



0885631014998



885631014998



0886112168261



886112168261



0885631015001



885631015001



0885631014929



885631014929



0885631015018



885631015018



0885631014950



885631014950



0885631014974



885631014974



0885631014936



885631014936




0885631014943



885631014943




0887111951403




887111951403




0888793628584



888793628584

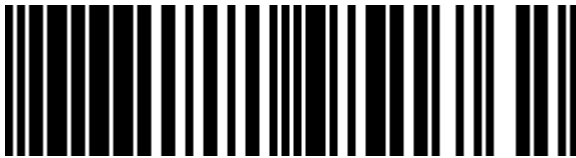

0887111951762



887111951762



0887758172704



887758172704



0885631014882



885631014882



0885631014899



885631014899



0885631014905



885631014905



0885631014912



885631014912

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.