



# HP LaserJet Color CP3525x Printer Colour 600 x 1200 DPI A4

Brand : HP

Product family: LaserJet

Product code: CC471A

Product name : Color LaserJet CP3525x Printer

Color LaserJet CP3525x 30 ppm / 30 ppm / 1200 x 600 dpi / HP ImageREt 3600 / Duplex  
HP LaserJet Color CP3525x Printer. Print technology: Laser, Colour. Number of print cartridges: 4.  
Maximum resolution: 600 x 1200 DPI. Maximum ISO A-series paper size: A4. Print speed (black, normal quality, A4/US Letter): 30 ppm, Duplex printing. Network ready



Printing		Other features	
Print speed (colour, normal quality, A4/US Letter)	30 ppm	Standard output capacity for envelopes	10 sheets
Colour *	✓		Windows Vista: Intel Pentium II or Celeron processor, Adobe Acrobat Reader 5, 512 MB RAM, 220 MB hard disk space, Microsoft Internet Explorer 7, CD-ROM drive; USB port; Microsoft Windows 2000, XP, Server 2003, Server 2008: Intel Pentium II or Celeron processor, Adobe Acrobat Reader 5, 256 MB RAM, 220 MB hard disk space, Microsoft Internet Explorer 6, CD-ROM drive, USB port
Print technology *	Laser	Minimum system requirements	
Duplex printing *	✓		
Maximum resolution *	600 x 1200 DPI		
Print speed (black, normal quality, A4/US Letter) *	30 ppm		
Warm-up time	131 s		
Time to first page (black, normal)	11 s		
Features		Envelope feeder	✗
Number of print cartridges *	4	Printer management	HP Web Jetadmin, HP Easy Printer Care Software, HP Sure Supply, HP Colour Access Controls, HP Embedded Web Server
Input & output capacity		Acoustic power emissions	6.9 B(A) (active/printing), 4.6 B(A) (ready)
Total input capacity *	850 sheets	Power requirements	Input voltage 115 to 127 V ac (+/- 10%), 60 Hz (+/- 2 Hz), 12 A; 220 to 240 V ac (+/- 10%), 50 Hz (+/- 2 Hz), 6 A
Total output capacity *	250 sheets	Print quality (colour, best quality)	1200 DPI
Maximum input capacity	850 sheets	Duplex print options	Automatic (standard)
Maximum output capacity	250 sheets	Print speed (colour, best quality, A4)	30 ppm
Paper handling		Print speed (black, best quality, A4)	30 ppm
Maximum ISO A-series paper size *	A4	Paper handling	100-sheet multipurpose tray, 250-sheet input tray, Optional 500-sheet input tray, 250-sheet top output bin
Paper tray media types *	Bond paper, Envelopes, Glossy paper, Labels, Plain paper, Recycled paper, Transparencies	Electromagnetic compatibility	CISPR 22: 2005/EN 55022: 2006 Class B, EN 61000-3-2: 2000+A2, EN 61000-3-3: 1995+A1, EN 55024: 1998+A1+A2, FCC Title 47 CFR, Part 15 Class B (USA), ICES-003, Issue 4, (Canada), GB9254-1998, EMC Directive 2004/108/EC with CE Marking (Europe), other EMC approvals as required by individual countries
ISO A-series sizes (A0...A9) *	A4, A5	Standard input trays	3
Envelopes sizes	B5, C5, DL		
Duplex media weight	60 - 163, 60 - 220 g/m <sup>2</sup>		
Media types supported	Paper (plain, light, bond, recycled, mid-weight, heavy, mid-weight glossy, heavy glossy, extra heavy, extra heavy glossy, cardstock, card glossy) colour transparency, labels, letterhead, envelope, preprinted, prepunched, coloured, rough, opaque film		
Media size (tray 1)	Letter, legal, executive, 8.5 x 13, A4, A5, B5 (JIS), envelopes (No. 10, Monarch (7 3/4), C5, B5, DL), 98.4 x 148 to 215.9 x 355.6 mm		
Media weight (tray 1)	60 to 216 g/m <sup>2</sup> (plain paper), 105 to 220 g/m <sup>2</sup> (glossy paper)		
Network			
Network ready	✓		

Network		Other features	
Supported network protocols (IPv4)	Via HP Jetdirect print servers: TCP/IP (IP Direct Mode; may require software from the NOS vendor or third-party vendor: LPD, FTP, IPP), IPX/SPX, DLC/LLC, AppleTalk, Auto-IP, Apple Bonjour-compatible, NDS, Bindery, NCP, Telnet, SLP, IGMP, BOOTP/DHCP, WINS, SNMP v 1, 2c, 3, HTTP	Networking features	Via HP Jetdirect Gigabit Ethernet embedded print server: TCP/IP (IP Direct Mode; may require software from the NOS vendor or third-party vendor: LPD, FTP, IPP), IPX/SPX, DLC/LLC, AppleTalk, Auto-IP, Apple Bonjour-compatible, NDS, Bindery, NCP, Telnet, SLP, IGMP, BOOTP/DHCP, WINS, SNMP v 1, 2c, 3, HTTP HP Jetdirect Gigabit Ethernet embedded print server
Performance		Print quality (black, best quality)	1200 x 600 DPI
Internal memory *	512 MB	Wireless option type	Optional, enabled with purchase of a hardware accessory
Maximum internal memory	1 MB	Standard output capacity for transparencies	100 sheets
Built-in processor	✓	Driver updates	For a list of printer drivers and updated HP printer software go to <a href="http://go/cljcp3525_software">http://go/cljcp3525_software</a>
Processor model	Motorola Coldfire V5x Embedded	Duplex supported media size	A4, A5, B5 (JIS)
Processor frequency	515 MHz	Media handling	Sheetfed
Power		Memory technology	NANDFlash, DDR2 SDRAM
Power consumption (printing) *	60 W	Control panel	4-line graphical colour display, 3 lights (Attention, Data, Ready), 7 buttons (Help, Menu, OK, Stop, Back, Down, Up)
System requirements		Maximum paper trays	3
Minimum system requirements for Macintosh	Mac OS X v10.3, v10.4, v10.5; PowerPC G3, G4, G5 or Intel Core processor; 256 MB RAM; 160 MB hard disk space; CD-ROM drive; USB port	Media size (tray 2)	Letter, executive, A4, A5, B5 (JIS), 148 x 210 to 215.9 x 297 mm
Operational conditions		Media type and capacity (tray 2)	sheets (75 g/m <sup>2</sup> paper): 250, cardstock (163 g/m <sup>2</sup> ): 100, transparencies: 100
Operating temperature (T-T)	10 - 30 °C	Media weight (tray 2)	60 to 163 g/m <sup>2</sup> (plain paper), 105 to 220 g/m <sup>2</sup> (glossy paper)
Storage temperature (T-T)	0 - 35 °C	Media weight (tray 3)	60 to 176 g/m <sup>2</sup> (plain paper), 105 to 220 g/m <sup>2</sup> (glossy paper) (CP3525x)
Operating relative humidity (H-H)	10 - 70%	Paper handling standard/input	100-sheet multipurpose tray, 250-sheet input tray, 500-sheet input tray
Storage relative humidity (H-H)	10 - 90%	Paper handling standard/output	250-sheet top output bin
Operating temperature (T-T)	59 - 80.6 °F	Safety	IEC 60950-1 (International), EN 60950-1+A11 (EU), IEC 60825-1+A1+A2, UL/cUL Listed (US/Canada), GS License (Europe), EN 60825-1+A1+A2 (Class 1 Laser/LED Device) GB4943-2001, Low Voltage Directive 2006/95/EC with CE Marking (Europe); other safety approvals as required by individual countries
Sustainability		Upgrade type	Color tables, formatter firmware, software drivers
Sustainability certificates	ENERGY STAR	Compatible operating systems	Microsoft Windows 2000, XP Professional, Server 2003, Server 2008; Windows Vista; Mac OS X v10.3, v10.4, v10.5
Weight & dimensions		Package dimensions (W x D x H)	754.4 x 599.4 x 726.4 mm (29.7 x 23.6 x 28.6")
Maximum dimensions (W x D x H)	822 x 739 x 520 mm	Pallet dimensions (W x D x H) (imperial)	1201.4 x 800.1 x 2280.9 mm (47.3 x 31.5 x 89.8")
Pallet dimensions (W x D x H)	1200 x 800 x 2280 mm	Pallet weight (imperial)	325.7 kg (718 lbs)
Weight	40.5 kg	Product dimensions when open (LxWxD)	82.3 cm (32.4")
Dimensions (WxDxH)	514 x 491 x 520 mm	Weight (imperial)	Includes print cartridge 89.3 lb
Packaging data		Acoustic pressure emissions bystander (active, print, copy or scan)	54 dB(A)
Package weight	48 kg	Duplex binding	✓
Packaging content		First page out (black&white, A4, ready)	11 s
Bundled software	Software for Microsoft Windows: Desktop SureSupply, HP Update. Macintosh: HP Postscript 3 driver software (v4.3.1) and HP Printer Utility for Mac OS X	First page out (black&white, letter, ready)	11 s
Logistics data			
Pallet gross weight	326 kg		
Master (outer) cases per pallet	2 pc(s)		
Layers per pallet	3 pc(s)		
Products per pallet	6 pc(s)		
Other features			
Print quality (black, normal quality)	600 DPI		
Recommended operating temperature range (T-T)	15 - 27 °C		
Mac compatibility	✓		
I/O ports	1 USB-B, 1 10/100/1000 Base-T Ethernet		
Input capacity for envelopes (primary tray)	10 sheets		

Other features		Other features	
Custom media sizes	Multipurpose tray: 98 x 148 to 216 x 356 mm; 250-sheet input tray: 148 x 210 to 216 x 297 mm; optional 500-sheet input tray: 148 x 210 to 216 x 356 mm	First page out (black&white, letter, sleep)	17 s
Standard media sizes	A4, A5, B5 (JIS), envelopes (B5, C5, DL)	Media sizes supported (imperial)	Multipurpose tray: letter, legal, executive, statement, envelopes (No. 9, No. 10, Monarch); 250-sheet input tray: letter, executive; 500-sheet tray 3: letter, legal, executive, 8.5 x 13 in
Typefaces	80 HP font set (plus Greek, Hebrew, Cyrillic, Arabic)	Operating altitude (imperial)	8000 ft
Media weights by paper path	Multipurpose tray: 60 to 216 g/m <sup>2</sup> (plain paper), 105 to 220 g/m <sup>2</sup> (glossy paper); 250-sheet input tray: 60 to 163 g/m <sup>2</sup> (plain paper), 105 to 220 g/m <sup>2</sup> (glossy paper); optional 500-sheet input tray: 60 to 176 g/m <sup>2</sup> (plain paper), 105 to 220 g/m <sup>2</sup> (glossy paper)	Package weight (imperial)	47.9 kg (105.6 lbs)
Recommended media weight	60 - 220 g/m <sup>2</sup>	Print speed (black, best quality, letter)	< 30
		Print speed (colour, best quality, letter)	< 30
		Size (imperial)	51.3 cm (20.2")
		Acoustic power emissions (ready)	46 dB
		Acoustic pressure emissions bystander (ready)	33 dB
		Automatic paper sensor	✘
		SureSupply connection type	Direct and Network
		SureSupply supported	✔
		Typical electricity consumption (TEC) number	4.212 kWh/Week
		Dimension note (imperial)	Dimensions vary as per configuration
		Dimension note (metric)	Dimensions vary as per configuration
		Recommended media weight (duplex, imperial)	16 to 43 lb (automatic duplex), 16 to 58 lb (manual duplex)
		Package dimensions (WxDxH)	755 x 600 x 725 mm



0883585892143




883585892143




0883585892044



883585892044

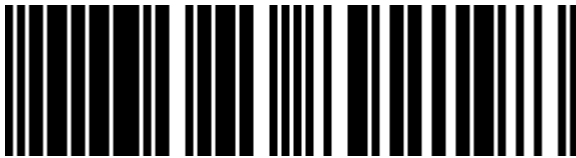

0883585892198



883585892198



0883585892105



883585892105



0883585892259



883585892259



0883585934379



883585934379



0883585892242




883585892242




0883585892235



883585892235

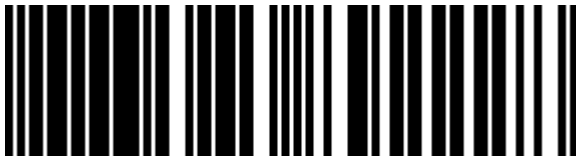

0883585892228



883585892228



0883585892211



883585892211



0883585892204



883585892204



0883585892181



883585892181



0883585892174




883585892174




0883585892167



883585892167

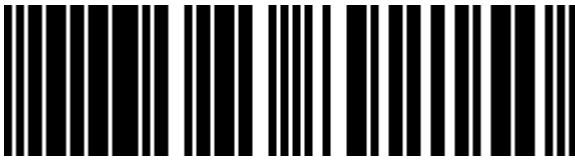

0883585892150



883585892150



0883585892136



883585892136



0883585892129



883585892129



0883585892112



883585892112



0883585892099




883585892099



0883585892082



883585892082

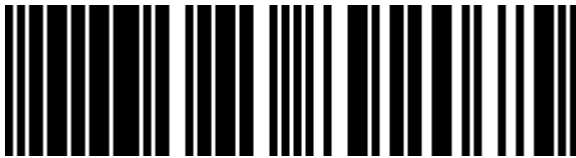

0883585892075



883585892075



0883585892068



883585892068



0883585892051



883585892051

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.