



# HP LaserJet Enterprise 700 color MFP M775f Laser A3 600 x 600 DPI 30 ppm

**Brand :** HP

**Product family:** LaserJet

**Product code:** CC523A

**Product name :** LaserJet Enterprise 700 color MFP M775f

HP LaserJet Enterprise 700 color MFP M775f Printer, Laser, 30ppm, A3, 800MHz, 1536MB, 8.07" CGD

HP LaserJet Enterprise 700 color MFP M775f Laser A3 600 x 600 DPI 30 ppm:

**as HP LaserJet Enterprise 700 color MFP M775dn with standard built-in fax; 1 x 500-sheet tray; 1 x 500-sheet feeder and stand**

Enable large-volume professional-quality colour printing on a wide range of paper sizes up to A3, with paper capacity up to 4,350 sheets<sup>[2]</sup>. Preview and edit scanning jobs. Centrally manage printing policies. Safeguard sensitive business information.

HP LaserJet Enterprise 700 color MFP M775f. Print technology: Laser, Printing: Colour printing, Maximum resolution: 600 x 600 DPI, Print speed (colour, normal quality, A4/US Letter): 30 ppm. Copying: Colour copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 600 x 600 DPI. Faxing: Mono faxing. Duplex functions: Print, Copy, Scan. Maximum ISO A-series paper size: A3. Direct printing. Product colour: Grey, White



Printing		Ports & interfaces	
Duplex printing mode	Auto	Optional connectivity	Wireless LAN
Print resolution colour	600 x 600 DPI	<b>Network</b>	
Print resolution black	600 x 600 DPI	Wi-Fi *	✗
Print technology *	Laser	Ethernet LAN *	✓
Printing *	Colour printing	Cabling technology	10/100/1000Base-T(X)
Duplex printing *	✓	Ethernet LAN data rates	10,100,1000 Mbit/s
Maximum resolution *	600 x 600 DPI	Security algorithms	PEAP, SNMPv3, EAP-TLS, IPsec, WPA2-Enterprise, SSL/TLS
Print speed (black, normal quality, A4/US Letter) *	30 ppm	Mobile printing technologies	Apple AirPrint, HP ePrint, Mopria Print Service
Print speed (colour, normal quality, A4/US Letter)	30 ppm	<b>Performance</b>	
Print speed (colour, normal quality, A3)	15 ppm	Maximum internal memory	1536 MB
Time to first page (black, normal)	10.5 s	Internal storage capacity	500 GB
Time to first page (colour, normal)	10.5 s	Card reader integrated	✗
N-in-1 print function	✓	Internal memory *	1536 MB
Watermark printing	✓	Built-in processor	✓
Secure printing	✓	Processor frequency	800 MHz
<b>Copying</b>		Sound pressure level (printing)	53 dB
Duplex copying *	✓	Sound pressure level (copying)	53 dB
Copying *	Colour copying	Sound power level (printing)	6.7 dB
Maximum copy resolution *	600 x 600 DPI	<b>Design</b>	
Copy speed (black, normal quality, A4)	30 cpm	Product colour *	Grey, White
		Market positioning *	Business

<b>Copying</b>		<b>Design</b>	
Copy speed (colour, normal quality, A4)	30 cpm	Built-in display *	✓
Maximum number of copies	9999 copies	Display	CGD
Copier resize	25 - 400%	Display diagonal	20.5 cm (8.07")
Auto fit function	✓	Touchscreen	✓
<b>Scanning</b>		Control type	Touch
Duplex scanning *	✓	Colour display	✓
Scanning *	Colour scanning	<b>Power</b>	
Optical scanning resolution *	600 x 600 DPI	Power consumption (average operating)	703 W
Maximum scan resolution	600 x 600 DPI	Power consumption (PowerSave)	14.8 W
Maximum scan area	297 x 420 mm	Power consumption (printing)	686 W
Scanner type *	Flatbed & ADF scanner	Power consumption (copying)	703 W
Scan technology	CCD	Power consumption (ready)	85 W
Scan to	E-mail, Network folder, USB, Fax	Power consumption (sleep)	14.8 W
Scan speed (colour)	30 ppm	Power consumption (off)	0.5 W
Scan speed (black)	30 ppm	Energy Star Typical Electricity Consumption (TEC)	3.38 kWh/week
Image formats supported	MTIFF, JPEG, TIFF	AC input voltage	110 - 240 V
Document formats supported	XPS, PDF	AC input frequency	50/60 Hz
Input colour depth	24 bit	<b>System requirements</b>	
Greyscale levels	256	Windows operating systems supported	Windows 7, Windows Vista, Windows 10, Windows 8, Windows XP
<b>Fax</b>		Mac operating systems supported	Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion
Faxing *	Mono faxing	Linux operating systems supported	✓
Fax resolution (black)	300 x 300 DPI	Server operating systems supported	Windows Server 2003, Windows Server 2008
Fax transmission speed	3 sec/page	Other operating systems supported	Linux, Novell
Modem speed	33.6 Kbit/s	<b>Operational conditions</b>	
Auto-redialing	✓	Operating relative humidity (H-H)	10 - 70%
Speed dialling	✓	Recommended humidity operating range	30 - 70%
Fax speed dialling (max numbers)	100	Operating temperature (T-T)	15 - 27 °C
Fax forwarding	✓	<b>Certificates</b>	
Fax broadcasting	100 locations	Certification	CISPR 22: 2008/EN 55022: 2010 Class A, EN 61000-3-2: 2006 +A1:2009 +A2:2009, EN 61000-3-3:2008, EN 55024: 1998+A1+A2, FCC Title 47 CFR, Part 15 Class A (USA), ICES-003, Issue 4, (Canada), GB9254-2008, GB17625.1-2003, EMC Directive 2004/108/EC with CE Marking (Europe), other EMC approvals as required by individual countries
Fax delayed sending	✗	<b>Sustainability</b>	
Auto reduction	✓	Sustainability compliance	✓
<b>Features</b>		Sustainability certificates	EPEAT Silver, ENERGY STAR, Blue Angel
Recommended duty cycle	2500 - 7500 pages per month	<b>Weight &amp; dimensions</b>	
Maximum duty cycle *	120000 pages per month	Width	745 mm
Duplex functions *	Print, Copy, Scan	Depth	668 mm
Digital sender	✓	Height	1143 mm
Number of print cartridges *	4	Weight	96.8 kg
Printing colours *	Black, Cyan, Magenta, Yellow	<b>Packaging data</b>	
Page description languages	PCL 5, PCL 6, PDF 1.4, PostScript 3	Package width	856 mm
Printer fonts	PostScript, Scalable, TrueType, Windows	Package depth	760 mm
All-In-One-multitasking	✓	Package height	1522 mm
Country of origin	Mexico, China	Package weight	116 kg
HP segment	Business		
<b>Input &amp; output capacity</b>			
Total number of input trays *	4		
Total input capacity *	1350 sheets		
Total output capacity *	250 sheets		
Paper tray 1 input capacity	100 sheets		
Paper tray 2 input capacity	250 sheets		
Multi-Purpose tray	✓		
Multi-Purpose tray input capacity	100 sheets		
Paper input type	Paper tray		
Auto document feeder (ADF)	✓		
Auto document feeder (ADF) input capacity	100 sheets		
Maximum number of input trays	4		
Maximum input capacity	1350 sheets		

Input & output capacity		Packaging content	
Maximum output capacity	250 sheets	Cables included	AC
Paper handling		Drivers included	✓
Maximum ISO A-series paper size *	A3	Warranty card	✓
Maximum print size	302 x 454.2 mm	Quick installation guide	✓
Paper tray media types *	Thick paper, Envelopes, Heavy paper, Rough paper, Letterhead, Bond paper, Plain paper, Transparencies, Card stock, Matte paper, Labels, Recycled paper, Glossy paper	Bundled software	Windows Installer, HP PCL 6 discrete driver, Mac Installer, HP Postscript emulation driver
ISO A-series sizes (A0...A9) *	A3, A4, A5, A6	Logistics data	
ISO B-series sizes (B0...B9)	B5	Pallet gross weight	116 g
ISO C-series sizes (C0...C9)	C5, C6	Layers per pallet	1 pc(s)
Non-ISO print media sizes	16K	Products per pallet	1 pc(s)
JIS B-series sizes (B0...B9)	B4, B5, B6	Technical details	
Envelopes sizes	B5, C5, C6, DL	Master (outer) cases per pallet layer	1 pc(s)
Photo paper sizes	10x15 cm	Other features	
Custom media width	76 - 320 mm	Number of users	30 user(s)
Custom media length	127 - 470 mm	Pallet dimensions (W x D x H)	856 x 760 x 1522 mm
Paper tray media weight	60 - 220 g/m <sup>2</sup>	Recommended system requirements	Windows 10, Windows 8, Windows 7, Windows Vista, Windows XP (SP2+), Windows Server 2003 (SP1+), Windows Server 2008, Windows Server 2008 R2; 200 MB available hard disk space; operating system compatible hardware system requirements, see <a href="http://www.micr">http://www.micr</a>
Ports & interfaces		Acoustic power emissions (ready)	56 dB
Standard interfaces	USB 2.0	Acoustic pressure emissions bystander (ready)	42 dB
Direct printing *	✓	All-in-one functions	Copy, Digital sender, Fax, Print, Scan
USB port	✓	Colour all-in-one functions	Copy, Print, Scan
USB 2.0 ports quantity	4		



0886112625542



886112625542




0886112625535



886112625535



0886112625504



886112625504



0887111951601



887111951601



0886112625511




886112625511




0886112625481



886112625481

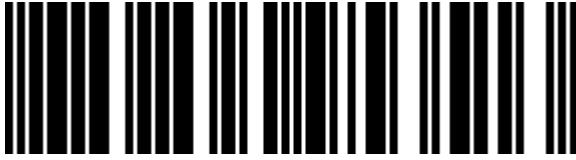


0889894953513



889894953513




0888793628614



888793628614




0886112625443



886112625443



0886112625450



886112625450



0886112625467



886112625467



0886112625474



886112625474



0886112625498



886112625498



0887111951779



887111951779



0887758172711



887758172711



0886112625429



886112625429



0886112625436



886112625436

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.