



HP Photosmart D7260 Printer photo printer Inkjet 4800 x 1200 DPI

Brand : HP

Product family: Photosmart

Product code: CC975B

Product name : Photosmart D7260 Printer



Photosmart D7260, 4800dpi, 34ppm b/w, 8.9cm touch LCD, USB/Pbridge/MCS/RJ-45, A4

HP Photosmart D7260 Printer photo printer Inkjet 4800 x 1200 DPI:

Use the 3.5-inch touchscreen for the fastest and easiest way to print photos at home. Stay efficient with laser-quality documents, blazing print speeds, HP Smart Web Printing, an automated paper tray and built-in Ethernet.

HP Photosmart D7260 Printer. Print technology: Inkjet, Maximum resolution: 4800 x 1200 DPI. Direct printing



| Printing | | Other features | |
|---|--|--|--|
| Print technology * | Inkjet | Package dimensions (WxDxH) | 532 x 233 x 466 mm |
| Maximum resolution * | 4800 x 1200 DPI | Pallet dimensions (W x D x H) | 1215 x 1016 x 2476 mm |
| Print speed (black, draft quality, A4/US Letter) | 34 ppm | Print quality (colour, best quality) | 4800 DPI |
| Print speed (colour, draft quality, A4/US Letter) | 33 ppm | Print speed (black, normal quality, A4/US Letter) | 7.8 ppm |
| Print head nozzles | 3900 | Print speed (colour, normal quality, A4/US Letter) | 7.8 ppm |
| Print speed (black, best quality, A4) | 4.5 ppm | Print quality, vertical alignment accuracy | +/- 0.0508 mm |
| Print speed (colour, best quality, A4) | 34 ppm | Standard input trays | 2 |
| Print speed (black, fast normal quality, A4) | 7.8 ppm | | 10 x 15 cm photos in as fast as 10 seconds; documents up to 34 ppm black/33 ppm colour. 8.9 cm (3.5 inch) interactive touchscreen for previewing and selecting photos without a PC. Direct printing from compatible memory cards, PictBridge cameras and USB flash drive. Organise, enhance, remove red-eye, sharpen and crop photos with HP Photosmart Essential Software. Economical printing with six individual HP Vivera Inks; optional high capacity black (not included). 10 x 15 cm photos in as fast as 10 seconds; documents up to 34 ppm black/33 ppm colour. Built-in Ethernet 802.3 connectivity. 8.9 cm (3.5 inch) interactive touchscreen for previewing and selecting photos without a PC. 100-sheet A4 tray, automated 10 x 15 cm photo tray, optional auto two-sided printing accessory. Direct printing from compatible memory cards, PictBridge cameras and USB flash drive. Organise, enhance, remove red-eye, sharpen and crop photos with HP Photosmart Essential Software. Economical printing with six individual HP Vivera Inks; optio |
| Print speed (colour, fast normal quality, A4) | 8 ppm | | |
| Features | | Technical features | |
| Market positioning * | Home & office | Typefaces | 13 built-in fonts |
| Number of print cartridges | 6 | Networking features | Standard |
| Printing colours | Black, Cyan, Light Cyan, Magenta, Yellow | Paper handling standard/output | 50-sheet output tray |
| Display diagonal | 8.89 cm (3.5") | Compatible operating systems | Microsoft Windows 2000 (SP3), XP Home, XP Professional; Windows Vista; Mac OS X v 10.3.9, Mac OS X v 10.4 |
| Display resolution | 800 x 600 pixels | | |
| Maximum duty cycle | 3000 pages per month | | |

| Features | | Other features | |
|---|--|--|--|
| Electromagnetic compatibility | US/ Canada - CFR 47 Part 15 subparts b,c; EU/EMEA - CISPR22:1997 + A1:2000 + A2:2002/EN55022:1998 + A1:2000 + A2:2003, CISPR24:1997 + A1:2001 + A2:2002/EN55024:1998 + A1:2001 + A2:2003, IEC61000-3-2:2000 A1:2000 + A2:2005/EN61000-3-2:2000 + A2:2005, IEC61000-3-3:1994 + A1:2001 / EN61000-3-3:1995 + A1:2001, EN301 489-1 V1.4.1:2002/EN301 489-17 V1.2.1:2002, EN300 328 V1.6.1:2004-11; Japan - VCCI/CISPR22:1997; China - GB9254-1998, GB17625.1-2003, MII spec. 353:2002; Korea - CISPR22 (2003), KN61000-4-2/IEC61000-4-2:2001, KN61000-4-3/IEC61000-4-3:2002, KN61000-4-4/IEC61000-4-4:2005, KN61000-4-5/IEC61000-4-5:2001, KN61000-4-6/IEC61000-4-6:2004, KN61000-4-8/IEC61000-4-8:2001, KN61000-4-11/IEC61000-4-11:2004, MIC Std. 2006-84, RRL std. 2005-128; Taiwan - CNS13438, DGT-LP0002; Aus/NZ - AS/NZS CISPR22:2004, FCC 15.247 of ETS 300 328 | Print quality (black, draft quality) | 300 DPI |
| | Safety | IEC 60950-1: 2001/EN60950-1: 2001 (for printers and adapters); IEC 60825-1: 1993+A1; 1997+A2: 2001/EN 60825-1: 1994: Class 1 for LEDs; GB4943:2001; CNS14336 | Print quality (black, normal quality) |
| Input & output capacity | | A6 Card | ✓ |
| Total input capacity | 100 sheets | Automatic paper sensor | ✓ |
| Total output capacity | 50 sheets | Camera phone | Direct photo printing from camera phones with the optional HP bt450 Bluetooth Wireless Printer Adapter Yes |
| Standard output capacity for transparencies | 25 sheets | Exifprint supported | Yes, Version 2.2 |
| Maximum input capacity | 100 sheets | Maximum input capacity (photo paper) | 30 sheets |
| Maximum input capacity for transparencies | 30 sheets | Maximum input capacity for 10 x 15 cm photographs | 20 sheets |
| Maximum input capacity for cards | 40 | Maximum print length (imperial) | 24 in |
| Maximum input capacity for envelopes | 10 | Maximum print length | 610 mm |
| Maximum input capacity for labels | 30 | Media handling | Sheetfeed |
| Maximum output capacity | 50 sheets | Media sizes supported (imperial) | Letter, legal, executive, cards, No. 10 envelopes, photo (4 x 6 in, 5 x 7 in, 8 x 10 in), panoramic (4 x 12 in, 4 x 24 in) |
| Maximum paper trays | 1 plus automated 4 x 6-in photo tray | Media weights by paper path | US letter: 60 to 90 g/m ² ; A4: 60 to 90 g/m ² ; legal: 75 to 90 g/m ² ; envelopes: 75 to 90 g/m ² ; cards: up to 200 g/m ² ; photo paper: up to 280 g/m ² |
| Paper handling | | Package dimensions (W x D x H) | 530.9 x 233.7 x 464.8 mm (20.9 x 9.2 x 18.3") |
| Paper tray media types | Card stock, Envelopes, Iron-On Transfers, Labels, Photo paper, Plain paper, Transparencies | Package weight (imperial) | 9.98 kg (22 lbs) |
| ISO A-series sizes (A0...A9) | A4, A5 | Pallet dimensions (W x D x H) (imperial) | 1117.6 x 1016 x 2476.5 mm (44 x 40 x 97.5") |
| Non-ISO print media sizes | Index card | Pallet weight (imperial) | 471.7 kg (1040 lbs) |
| Custom media sizes | 76 x 102 to 216 x 610 mm | Photo proofsheets supported | ✗ |
| Duplex print options | Automatic (optional) | Print head | 6 (1 each black, cyan, magenta, yellow, light cyan, light magenta) |
| Paper handling | 100-sheet input tray, 20-sheet automated 10 x 15 cm photo tray, 50-sheet output tray | Print speed (colour, normal quality, 10 x 15 photo) | As fast as 22 sec As fast as 53 sec |
| Recommended media weight | A4: 65 - 90, HP envelopes: 70 - 90, HP cards: up - 200, HP pho- paper: up - 280 | Printer features | Color Printing |
| Standard media sizes | A4 (210 x 297 mm), A5 (148 x 210 mm), DL (110 x 220 mm), C6 (114 x 162 mm), A6 (105 x 148 mm), 300 x 100 mm, 130 x 180 mm, 100 x 150 mm (with or without tear-off/cut-off tab) | Product dimensions when open (LxWxD) | 46.2 cm (18.2") |
| | | Recommended media weight (imperial) | 16 to 24 lb |
| | | Size (imperial) | 46.2 cm (18.2") |
| | | Skew | +/- 0.006 in |
| | | Standard output capacity for cards | Up to 25 cards |
| | | SureSupply supported | ✓ |
| | | Video action printing supported | ✓ |
| | | Vivera inks supported | ✓ |
| | | Weight (imperial) | 17.6 lb |
| | | Wireless option type | Optional, with HP bt450 Bluetooth Wireless Printer and PC Adapter |
| | | JetDirect Compatible Products | ✗ |
| | | Network ready | ✓ |
| | | UNSPSC-code | 43212104 |
| | | Maximum output capacity (photo paper) | 10 sheets |
| | | Maximum output capacity for labels | 25 sheets |
| | | Maximum output capacity for transparencies | 25 sheets |
| | | Page yield identifier | PSD7200 |
| | | Pallet size (EU) | 1200 x 1000 x 2014 mm |
| | | Print speed (black, best quality, letter) | < 4.5 |
| | | Print speed (black, fast normal quality, letter) | < 7.8 |
| | | Print speed (colour, best quality, letter) | < 34 |

| Paper handling | | Other features | |
|---|---|--|-------------------|
| Recommended media | Paper (inkjet, photo, plain), envelopes, labels, cards (greeting, index), transparencies, iron-on transfers | Print speed (colour, draft quality, 10 x 15 photo) | As fast as 10 sec |
| Paper handling standard/input | 100-sheet input tray, automated 10 x 15 cm photo tray | Print speed (colour, draft quality, letter) | < 33 |
| Ports & interfaces | | Print speed (colour, fast normal, letter) | < 8.0 |
| Direct printing * | ✓ | Skew (transparency) | +/- 0.006 in |
| PictBridge * | ✓ | Standard input capacity for legal | 100 sheets |
| USB port * | ✓ | Standard input capacity for cards | Up to 40 cards |
| USB 2.0 ports quantity | 1 | Standard input capacity for envelopes | 10 sheets |
| I/O ports | 1 USB - compatible with USB 2.0 specifications, 1 PictBridge, 1 Ethernet | Standard input capacity for transparencies | Up to 30 sheets |
| Network | | Standard output capacity for labels | 25 sheets |
| Ethernet LAN * | ✓ | Standard output capacity for legal | 50 sheets |
| Performance | | Wireless technology | Bluetooth |
| Internal memory | 64 MB | Functions | Color Printing |
| Power | | | |
| Power consumption (printing) * | 5 W | | |
| Power consumption (off) | 0.7 W | | |
| Acoustic power emissions | 6.8 B(A) (printing in fast draft mode); 6.0 B(A) (printing in normal mode) | | |
| System requirements | | | |
| Minimum system requirements | Windows 2000 (SP3 or higher) or XP: Any Intel Pentium II, Celeron or compatible processor, 233 MHz or higher, 128 MB RAM, 900 MB hard disk space, CD-ROM, USB port; Microsoft Internet Explorer 6. Windows Vista: Microsoft Internet Explorer, 800 MHz 32- or 64-bit processor, 512 MB RAM, 900 MB hard disk space, CD-ROM, USB port. SVGA 800 x 600 monitor with 16-bit colour; Adobe Acrobat Reader 5 or higher recommended; Internet access recommended., Mac OS X v10.3.9, v10.4 (or later); G3, G4, G5 or Intel Core processor; 128 MB RAM; 200 MB available hard disk space; CD ROM; USB port. SVGA 800 x 600 monitor with 16-bit colour; Adobe Acrobat Reader 5 or higher recommended; Internet access recommended. | | |
| Operational conditions | | | |
| Operating temperature (T-T) | 5 - 40 °C | | |
| Operating temperature (T-T) | 41 - 104 °F | | |
| Storage temperature (T-T) | -40 - 60 °C | | |
| Operating relative humidity (H-H) | 20 - 80% | | |
| Storage relative humidity (H-H) | 5 - 90% | | |
| Recommended operating temperature range (T-T) | 15 - 30 °C | | |
| Sustainability | | | |
| Sustainability certificates | ENERGY STAR | | |
| Weight & dimensions | | | |
| Weight | 8 kg | | |
| Maximum dimensions (W x D x H) | 462.5 x 500 x 236.2 mm | | |
| Packaging data | | | |
| Bundled software | HP Photosmart Essential 2.0 | | |
| Package weight | 10 kg | | |

Logistics data

| | |
|---------------------------------|----------|
| Pallet gross weight | 473 kg |
| Master (outer) cases per pallet | 9 pc(s) |
| Layers per pallet | 5 pc(s) |
| Products per pallet | 45 pc(s) |
| Products per pallet (EU) | 36 pc(s) |

Other features

| | |
|--------------------------------|---|
| Processor frequency | 2000 MHz |
| Dimensions (WxDxH) | 462.5 x 387.3 x 172.9 mm |
| Power requirements | Input voltage 100 to 240 VAC (+/- 10%); 50/60 Hz (+/- 3 Hz) |
| Mac compatibility | ✓ |
| Compatible ink types, supplies | Dye-based (colour), pigment-based (black) |
| Control panel | 4 front-panel buttons (Power, Print, Cancel, Red Eye) |



0883585100187



883585100187



0883585100170



883585100170



0883585100194



883585100194




8835851001706



0883585100224



883585100224

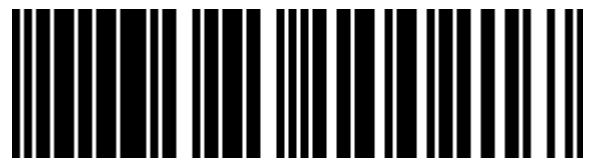

0883585100217



883585100217

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.