



HP LaserJet Enterprise CP5525n Colour 600 x 600 DPI A4

Brand : HP

Product family: LaserJet

Product code: CE707A

Product name : LaserJet Enterprise CP5525n



Color LaserJet Enterprise CP5525n Printer CP5520/CP5525 series

HP LaserJet Enterprise CP5525n. Print technology: Laser, Colour. Number of print cartridges: 4, Maximum duty cycle: 120000 pages per month. Maximum resolution: 600 x 600 DPI. Maximum ISO A-series paper size: A4. Print speed (black, normal quality, A4/US Letter): 30 ppm, Duplex printing. Display: LCD. Network ready

Printing		Network	
Print speed (colour, normal quality, A4/US Letter)	30 ppm	Supported network protocols (IPv6)	DHCPv6, MLDv1, ICMPv6
Colour *	✓	Management protocols	SNMPv3, SSL/TLS, 802.1X, IPP (TLS), IPsec
Print technology *	Laser	Performance	
Duplex printing *	✓	Internal memory *	1024 MB
Maximum resolution *	600 x 600 DPI	Maximum internal memory	1024 MB
Print speed (black, normal quality, A4/US Letter) *	30 ppm	Internal storage capacity	8 GB
Time to first page (black, normal)	10 s	Storage media	HDD
Time to first page (colour, normal)	10 s	Processor frequency	800 MHz
Economical printing	✓	Design	
Features		Display	LCD
Maximum duty cycle *	120000 pages per month	Power	
Recommended duty cycle	10000	Power consumption (printing) *	620 W
Printing colours *	Black, Cyan, Magenta, Yellow	Power consumption (standby)	62 W
Number of print cartridges *	4	Power consumption (PowerSave)	19.5 W
Page description languages *	PCL 5c, PCL 6, PDF 1.4, PostScript 3	Power consumption (off)	0.5 W
Input & output capacity		System requirements	
Total number of input trays *	3	Mac operating systems supported	Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard
Total input capacity *	750 sheets	Server operating systems supported	Windows Server 2003, Windows Server 2008, Windows Server 2008 R2
Total output capacity *	300 sheets	Minimum system requirements for Macintosh	150MB HDD
Multi-Purpose tray	✓	Minimum storage drive space	220 MB
Multi-Purpose tray input capacity	100 sheets	Operational conditions	
Paper handling		Operating temperature (T-T)	15 - 27.2 °C
Maximum ISO A-series paper size *	A4		
Maximum print size	216 x 356 mm		
Paper tray media types *	Card stock, Envelopes, Glossy paper, Labels, Plain paper, Transparencies		

Paper handling		Operational conditions	
ISO A-series sizes (A0...A9) *	A4	Operating temperature (T-T)	59 - 81 °F
Non-ISO print media sizes	Executive, Legal, Letter	Weight & dimensions	
Envelopes sizes	7 3/4, 10	Weight	53.3 kg
Custom media width	76.2 - 320 mm	Dimensions (WxDxH)	544 x 586 x 465 mm
Custom media length	127 - 469.9 mm	Other features	
Paper tray media weight	60 - 120 g/m ²	Mac compatibility	✓
Multi-Purpose Tray media weight	60 - 220 g/m ²	Envelope feeder	✗
Ports & interfaces		Compliance industry standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
Standard interfaces	Ethernet, USB 2.0	Networking features	Gigabit Ethernet
USB 2.0 ports quantity	1	Compatible operating systems	Windows7 x32/64-Bit Windows Vista x32/64-Bit Windows XP (SP2) x32/64-Bit Windows Server 2008/2008 R2 x32/64-Bit Windows Server 2003 x32/64-Bit Citrix/Windows TS Novell Mac OS X v10.4+ Linux Unix
Network		Fonts included	✓
Network ready	✓	Power LED	✓
Wi-Fi *	✗	Stand-by LED	✓
Ethernet LAN *	✓	Dimensions (W x D x H) (imperial)	543.6 x 584.2 x 457.2 mm (21.4 x 23 x 18")
Security algorithms	802.1x RADIUS, SSL/TLS	Supported media weight (imperial)	26.3 kg (58 lbs)
Supported network protocols (IPv4)	Auto-IP, SLP, Telnet, IGMPv2, BOOTP/DHCP, WINS, IP Direct Mode, WS Print	Weight (imperial)	53.2 kg (117.3 lbs)
		Automatic paper sensor	✓
		SureSupply supported	✓



0884962820391



884962820391




0884962820377



884962820377



0884962820353



884962820353



0884962820261



884962820261



0884962820384



884962820384



0884962820285



884962820285




0884962820292




884962820292



0884962820308



884962820308

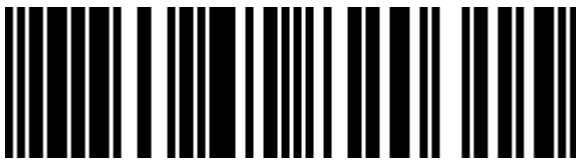

0884962820315



884962820315



0884962820346



884962820346



0884962820322



884962820322



0884962820360



884962820360



0884962820339



884962820339



0884962820278



884962820278

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.