



HP LaserJet Pro 400 M425dn Laser A4 1200 x 1200 DPI 33 ppm

Brand : HP

Product family: LaserJet

Product code: CF286A

Product name : Pro 400 M425dn

LaserJet Pro 400 M425dn - Copy/Scan/Fax/Print, A4, 35 ppm, 1200 x 1200 dpi, 800MHz, 256MB RAM, Black

HP LaserJet Pro 400 M425dn. Print technology: Laser, Printing: Mono printing, Maximum resolution: 1200 x 1200 DPI. Copying: Mono copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 1200 x 1200 DPI. Faxing: Mono faxing. Maximum ISO A-series paper size: A4. Direct printing. Product colour: Black



Printing		Network	
Print technology *	Laser	Wi-Fi *	✗
Printing *	Mono printing	Ethernet LAN *	✓
Duplex printing *	✓	Cabling technology	10/100/1000Base-T(X)
Maximum resolution *	1200 x 1200 DPI	Security algorithms	802.1x RADIUS, SSL/TLS
Print speed (black, normal quality, A4/US Letter) *	33 ppm	Supported network protocols (IPv4)	TCP/IP, FTP, IPP
Duplex print speed (black, normal quality, A4/US Letter)	15 ppm	Supported network protocols (IPv6)	TCP/IP
Time to first page (black, normal)	8 s	Performance	
Copying		Maximum internal memory	256 MB
Copying *	Mono copying	Memory slots	1
Maximum copy resolution *	600 x 600 DPI	Card reader integrated	✗
Copy speed (black, normal quality, A4)	33 cpm	Internal memory *	256 MB
Copy speed (black, normal, US Letter)	35 cpm	Built-in processor	✓
Maximum number of copies	99 copies	Processor frequency	800 MHz
Copier resize	25 - 400%	Sound pressure level (copying)	51 dB
Scanning		Sound pressure level (quiet mode)	6.4 dB
Scanning *	Colour scanning	Mac compatibility	✓
Optical scanning resolution *	1200 x 1200 DPI	Design	
Maximum scan area	216 x 297 mm	Product colour *	Black
Scanner type *	Flatbed & ADF scanner	Market positioning *	Business
Scan to	E-mail, USB	Built-in display *	✓
Scan speed (colour)	9 ppm	Display diagonal	8.89 cm (3.5")
Scan speed (black)	20 ppm	Touchscreen	✓
Input colour depth	30 bit	Control type	Touch
		Colour display	✓


Scanning		Power		
Greyscale levels	256	Power consumption (average operating)	600 W	
TWAIN version	1.9	Power consumption (standby)	9.5 W	
Fax		Power consumption (off)	0.1 W	
Faxing *	Mono faxing	AC input voltage	110 - 240 V	
Fax resolution (black)	300 x 300 DPI	AC input frequency	50 - 60 Hz	
Fax transmission speed	3 sec/page	System requirements		
Modem speed	33.6 Kbit/s	Windows operating systems supported	Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows Vista Business, Windows Vista Home Basic, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	
Fax memory	300 pages			
Auto-redialing	✓	Mac operating systems supported		
Fax speed dialing (max numbers)	120	Linux operating systems supported		✓
Fax forwarding	✓	Minimum RAM		512 MB
Fax broadcasting	119 locations	Minimum storage drive space		400 MB
Distinctive ring	✓	Minimum processor		1GHz
Features		Operational conditions		
Recommended duty cycle	750 - 3000 pages per month	Operating relative humidity (H-H)		10 - 80%
Maximum duty cycle *	50000 pages per month	Storage temperature (T-T)		-20 - 40 °C
Digital sender	✗	Operating temperature (T-T)	17.5 - 25 °C	
Number of print cartridges *	1	Storage relative humidity (H-H)	10 - 90%	
Printing colours *	Black	Sustainability		
Page description languages	PCL 5e, PCL 6, PDF 1.7, PostScript 3	Sustainability certificates	ENERGY STAR	
Input & output capacity		Weight & dimensions		
Total number of input trays *	2	Width	439.9 mm	
Total input capacity *	300 sheets	Depth	382.7 mm	
Total output capacity *	150 sheets	Height	423.5 mm	
Multi-Purpose tray	✓	Weight	15.1 kg	
Multi-Purpose tray input capacity	50 sheets	Packaging data		
Paper input type	Paper tray	Package width	597 mm	
Auto document feeder (ADF)	✓	Package depth	497 mm	
Auto document feeder (ADF) input capacity	50 sheets	Package height	490 mm	
Maximum number of input trays	3	Package weight	19.6 kg	
Maximum input capacity	800 sheets	Other features		
Maximum output capacity	150 sheets	Hardware scan resolution	1200 x 1200 DPI	
Paper handling		Networking features	10/100/1000 Base-TX	
Maximum ISO A-series paper size *	A4	Dimensions (WxDxH)	439.9 x 382.7 x 423.5 mm	
Maximum print size	215 x 355 mm	Network ready	✓	
Paper tray media types *	Envelopes, Labels, Plain paper, Pre-printed, Recycled paper, Transparencies	Power supply type	AC	
ISO A-series sizes (A0...A9) *	A4, A5, A6	Printer management	SNMPv2/v3, HTTP/HTTPS, Telnet, TFTP	
ISO B-series sizes (B0...B9)	B5	Safety	IEC, EN	
JIS B-series sizes (B0...B9)	B5	Maximum scan area (ADF)	216 x 381 mm	
Paper tray media weight	60 - 163 g/m ²	Minimum scan area (ADF)	102 x 127 mm	
Duplex media weight	60 - 120 g/m ²	All-in-one functions	Copy, Fax, Print, Scan	
Ports & interfaces		Colour all-in-one functions	Scan	
Standard interfaces	Ethernet, USB 2.0	Networking standards	IEEE 802.3, IEEE 802.3ab, IEEE 802.3u	
Direct printing *	✓	Package dimensions (WxDxH)	597 x 497 x 490 mm	
USB port	✓			
USB 2.0 ports quantity	1			

Other features

Electromagnetic compatibility CISPR, FCC, ICES




0886112340247




886112340247




0886112340254



886112340254

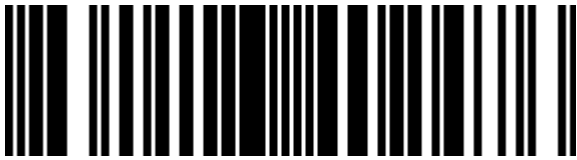


08861123402476

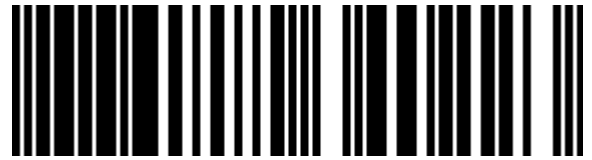

0886112340223



886112340223

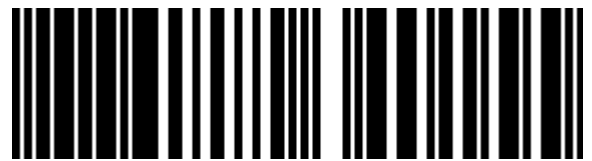

0886112340155



886112340155




0886112340285




886112340285




0886112340292



886112340292

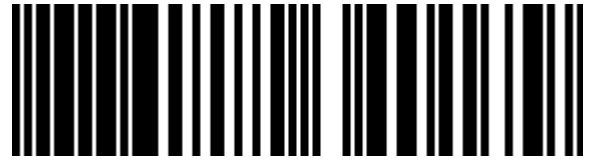


0886112340179




886112340179



0886112340216



886112340216

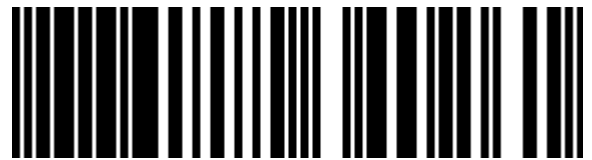

0886112340261



886112340261



0886112340278



886112340278




0886112340186




886112340186



0886112340230



886112340230

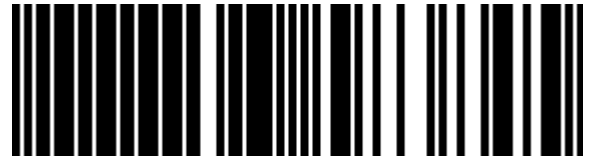

0888793583845




888793583845



0888182819715



888182819715

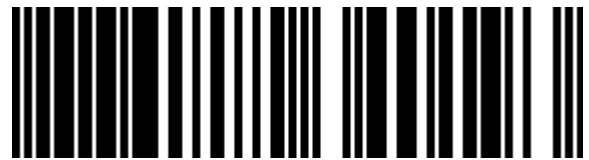

0886112340193



886112340193



0886112340209



886112340209



0886112340162



886112340162

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "As Is" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.