



## D-Link DEM-QX10Q-LR4 network transceiver module Fiber optic 40000 Mbit/s QSFP+ 1331 nm


**Brand :** D-Link

**Product code:** DEM-QX10Q-LR4

**Product name :** DEM-QX10Q-LR4

40G BASE-LR4, Single-mode, 10km, QSFP+

D-Link DEM-QX10Q-LR4. SFP transceiver type: Fiber optic, Maximum data transfer rate: 40000 Mbit/s, Interface type: QSFP+. Product colour: Blue, Silver, Certification: • FCC Class B • CE Class B • VCCI Class B • FDA/CDRH • TUV • CSA. Input voltage: 3.3 V, Maximum current: 1.13 A. Width: 18.4 mm, Depth: 118 mm, Height: 12.9 mm. Number of products included: 1 pc(s), Package width: 74 mm, Package depth: 131 mm

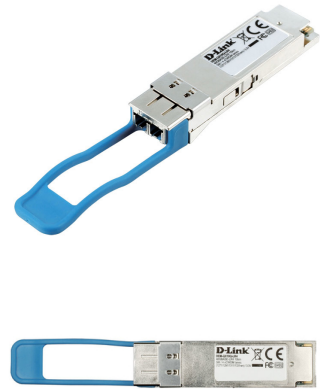

Performance		Weight & dimensions	
SFP transceiver type *	Fiber optic	Depth	118 mm
Maximum data transfer rate *	40000 Mbit/s	Height	12.9 mm
Interface type *	QSFP+	Weight	40 g
Single-mode fiber (SMF) supported	✓	<b>Packaging data</b>	
Fiber optic connector	LC	Number of products included	1 pc(s)
SFP transceiver standard	LR4	Package width	74 mm
Maximum transfer distance	10000 m	Package depth	131 mm
Wavelength	1331 nm	Package height	49 mm
Tx power (min)	-4 dBmW	Package weight	64 g
Tx power (max)	8.3 dBmW	<b>Technical details</b>	
Rx power (min)	3.5 dBmW	Sustainability certificates	RoHS
Rx power (max)	-13.7 dBmW	<b>Logistics data</b>	
Link budget	19.8 dB	Shipping (inner) case length	36 cm
Networking standards	IEEE 802.3ba	Shipping (inner) case width	26 cm
Digital Diagnostics Monitoring (DDM)	✓	Shipping (inner) case height	31 cm
<b>Features</b>		Shipping (inner) case net weight	3.2 kg
Product colour	Blue, Silver	Products per shipping (inner) case	50 pc(s)
Hot-Plug support	✓	Pallet gross weight (air)	272 kg
Certification	• FCC Class B • CE Class B • VCCI Class B • FDA/CDRH • TUV • CSA	Master (outer) cases per pallet (air)	60 pc(s)
<b>Power</b>		Products per pallet (air)	3000 pc(s)
Input voltage	3.3 V	Pallet gross length	102 cm
Maximum current	1.13 A	Pallet gross width	122 cm
<b>Operational conditions</b>		Pallet height (air)	199 cm
Operating temperature (T-T)	0 - 70 °C	Pallet gross weight (sea)	272 kg
Storage temperature (T-T)	-40 - 85 °C	Master (outer) cases per pallet (sea)	60 pc(s)
Operating relative humidity (H-H)	0 - 85%	Products per pallet (sea)	3000 pc(s)
Storage relative humidity (H-H)	0 - 85%	Pallet height (sea)	199 cm
<b>Weight &amp; dimensions</b>		Shipping (inner) case gross weight	4.2 kg
Width	18.4 mm	Harmonized System (HS) code	85369010



0790069390630



790069390630

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.