



# HP Scanjet G3110 Photo Scanner

Brand : HP

Product family: Scanjet

Product code: L2698A



Product name : Scanjet G3110 Photo Scanner

HP Scanjet G3110 Photo Scanner

HP Scanjet G3110 Photo Scanner. Maximum scan size: 216 x 297 mm, Optical scanning resolution: 4800 x 4800 DPI, Input colour depth: 48 bit. Scanner type: Flatbed scanner, Product colour: Grey, White. Sensor type: CCD, Light source: CCFL, Scan file formats: BMP, FPX, GIF, HTM, JPG, PCX, PDF, PNG, RTF, TIFF, TXT. Maximum ISO A-series paper size: A4, Scanning media types supported: Card stock, Envelopes, Photo paper, Plain paper, ISO A-series sizes (A0...A9): A4, A5. Standard interfaces: USB 2.0



Scanning		Operational conditions	
Maximum scan size *	216 x 297 mm	Operating temperature (T-T)	10 - 35 °C
Optical scanning resolution *	4800 x 4800 DPI	Storage temperature (T-T)	-40 - 60 °C
Colour scanning	✓	Operating relative humidity (H-H)	0 - 90%
Input colour depth	48 bit	Storage relative humidity (H-H)	0 - 90%
Film scanning	✓		
Greyscale levels	256		
Flatbed scan speed (b/w, A4)	10 sec/page		
Design		Certificates	
Scanner type *	Flatbed scanner	Electromagnetic compatibility	CE, FCC, ACA, GOST
Product colour *	Grey, White		
Built-in display *	✗	Weight & dimensions	
Performance		Width	455 mm
Sensor type *	CCD	Depth	305 mm
Light source	CCFL	Height	70 mm
Scan file formats	BMP, FPX, GIF, HTM, JPG, PCX, PDF, PNG, RTF, TIFF, TXT	Weight	2.9 kg
Scan to	File, Image	Packaging content	
Paper handling		Drivers included	✓
Scanning media types supported	Card stock, Envelopes, Photo paper, Plain paper	Bundled software	HP Photosmart, HP Image Editor, HP Red-eye Removal, HP Adaptive Lighting
Multi feed detection	✗	Other features	
Maximum ISO A-series paper size *	A4	Network ready	✗
ISO A-series sizes (A0...A9)	A4, A5	Minimum system requirements for Macintosh	Mac OS X v10.4.11; 10.5; 10.6
ISO B-series sizes (B0...B9)	B5	Maximum dimensions (W x D x H)	455 x 305 x 70 mm
Letter	✓	Pallet dimensions (W x D x H)	1200 x 1000 x 2354 mm
Ports & interfaces		Recommended operating temperature range (T-T)	10 - 35 °C
USB port *	✓	TWAIN version	1.9
USB version	2.0	Image scaling/enlargement range	10 - 2400%
Standard interfaces	USB 2.0	Safety	IEC 60950-1, CCC, GOST, BSMI, NOM
Power		Output resolutions	150, 200, 300, 600, 1200, 2400, 4800
Power consumption (typical)	15 W	Maximum scan area (imperial)	21.6 cm (8.5")
AC input frequency	50 - 60 Hz	Pallet dimensions (W x D x H) (imperial)	1219.2 x 1016 x 2341.9 mm (48 x 40 x 92.2")
Input voltage	100-240 V	Product dimensions when open (LxWxD)	45.5 cm (17.9")
Packaging data		Size (imperial)	45.5 cm (17.9")
Package dimensions (WxDxH)	542 x 131 x 443 mm	Stacking number for carton	10
Package dimensions (W x D x H)	542 x 131.1 x 443 mm (21.3 x 5.16 x 17.4")	Stacking number for pallet	2 pc(s)
		Weight (imperial)	2.9 kg (6.39 lbs)

Packaging data		Other features	
Package weight (imperial)	3.74 kg (8.25 lbs)	Dynamic range	3 dB
Package weight	3.74 kg	Pallet gross weight	302 kg
System requirements		Technical details	
Mac compatibility	✓	Sustainability certificates	ENERGY STAR
Minimum storage drive space	4096 MB	Logistics data	
Minimum RAM	1024 MB	Products per pallet	75 pc(s)
Minimum processor	800 MHz	Master (outer) cases per pallet	15 pc(s)
Compatible operating systems	Microsoft Windows 7, Windows Vista, Windows XP (32-bit / 64-bit), Windows XP, Windows 2000 Mac OS X v10.4.11, 10.5, 10.6	Layers per pallet	5 pc(s)
Windows operating systems supported	✓		
USB required	✓		



0883585789016



883585789016



0883585789023



883585789023



0884420149668




884420149668




0885631100387



885631100387

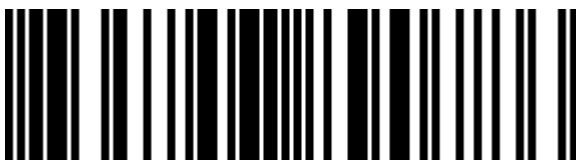

8835857890786

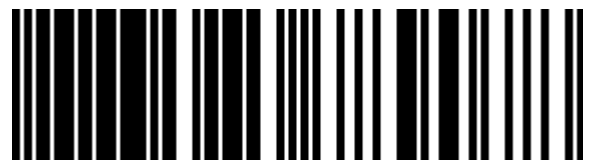

0883585789078




883585789078




0883585789085



883585789085

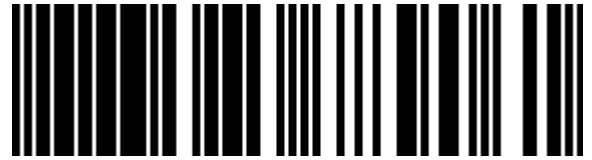

0883585789061




883585789061




0883585789047



883585789047

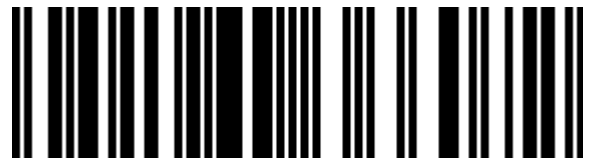

5051964366072

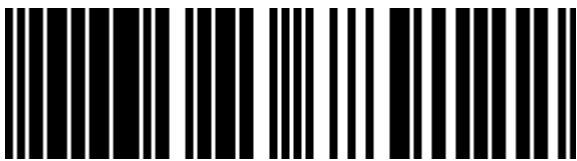

0883585789122




883585789122



0884420381778



884420381778

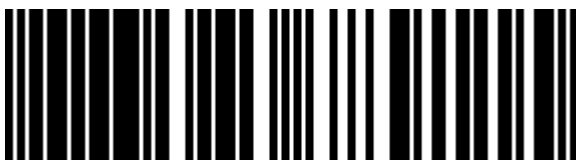

0883585789115



883585789115



0883585789160



883585789160



0883585789146




883585789146



0885631100394




885631100394

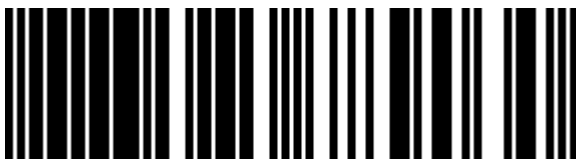

0883585789030



883585789030

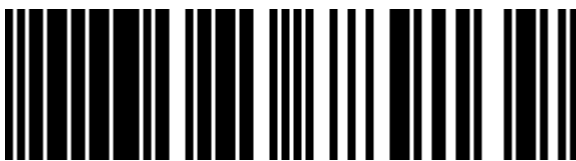

0883585789139



883585789139




0883585789054



883585789054



0883585789092




883585789092



0883585789108



883585789108

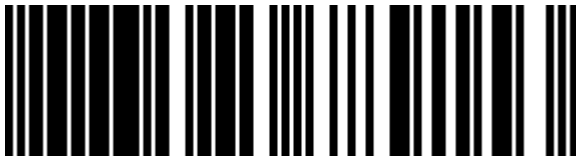

0883585789153



883585789153

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.