

Linksys

## Linksys LGS124 network switch Gigabit Ethernet (10/100/1000) 1U Black



**Brand :** Linksys

**Product code:** LGS124

**Product name :** LGS124

IEEE 802.3/u/x/ab/az, Gigabit Ethernet, 48 Gbps

[Linksys LGS124 network switch Gigabit Ethernet \(10/100/1000\) 1U Black:](#)



### GIGABIT PERFORMANCE

The unmanaged switch offers Gigabit speeds to minimize transfer times and greatly enhance the ability to stream high-bandwidth files to connected devices without interference.

### PLUG & PLAY CONVENIENCE

The Linksys unmanaged switch offers a quick and easy solution to extend your office network with plug & play installation.


### QUALITY OF SERVICE (QoS) TRAFFIC PRIORITIZATION

QoS traffic prioritization provides the ability to give precedence to particular devices or activities to ensure mission critical data throughput is maintained regardless of network congestion. Auto-sensing ports automatically optimize speed for each connected device.

### POWER SAVING FEATURES

Power saving features include auto power-down to disable unused ports, smart power for short cable runs, and a port status switch to control LED lights.

Management features		Design	
Quality of Service (QoS) support	✓	LED indicators	Activity, Link
<b>Ports &amp; interfaces</b>		Certification	FCC Class A, CE
Basic switching RJ-45 Ethernet ports quantity *	24	<b>Power</b>	
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Number of power supply units	1
Gigabit Ethernet (copper) ports quantity	24	AC input voltage	110 - 240 V
<b>Network</b>		AC input frequency	50 - 60 Hz
Networking standards *	IEEE 802.3, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x	Power consumption (typical)	14.16 W
Copper ethernet cabling technology	1000BASE-T, 100BASE-T, 10BASE-T	<b>Power over Ethernet (PoE)</b>	
Auto-sensing	✓	Power over Ethernet (PoE) *	✗
<b>Data transmission</b>		<b>Operational conditions</b>	
Throughput	1.488 Mpps	Operating temperature (T-T)	0 - 50 °C
MAC address table *	8000 entries	Storage temperature (T-T)	-20 - 70 °C
<b>Design</b>		Operating relative humidity (H-H)	10 - 90%
Rack mounting *	✓	Storage relative humidity (H-H)	10 - 90%
Form factor	1U	<b>Weight &amp; dimensions</b>	
Product colour	Black	Width	440 mm
Housing material	Metal	Depth	200 mm
		Height	44 mm
		Weight	2.37 kg
		<b>Packaging data</b>	
		Quick start guide	✓

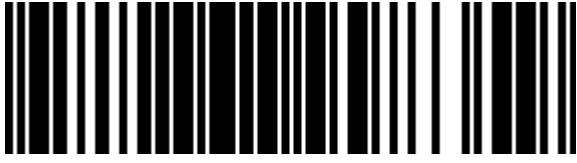

0722868998359



722868998359

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.