



HP LaserJet Color 5550dtn Printer Colour 600 x 600 DPI A3

Brand : HP

Product family: LaserJet

Product code: Q3716A

Product name : Color LaserJet 5550dtn Printer



Color LaserJet 5550dtn 28 ppm A4, 14 ppm A3, 600 x 600 dpi, HP ImageREt 3600, 3 paper trays, HP Jetdirect 620n Fast Ethernet Print Server, Duplex print

HP LaserJet Color 5550dtn Printer Colour 600 x 600 DPI A3:

Create impressive colour documents easily with this simple-to-use, wide-format laser printer. With its proven design, high performance and flexible features the HP Color LaserJet 5550 series printer meets the needs of dynamic workgroups.



- Delivers a perfect blend of brilliant print quality and great performance.
- Powerful wide-format colour performance for versatile workgroups.
- Experience office printing as it's meant to be.

HP LaserJet Color 5550dtn Printer. Print technology: Laser, Colour. Number of print cartridges: 4. Maximum resolution: 600 x 600 DPI. Maximum ISO A-series paper size: A3. Print speed (black, normal quality, A4/US Letter): 27 ppm, Duplex printing. Network ready

Printing		Other features	
Print speed (colour, normal quality, A4/US Letter)	28, 27	Standard media sizes	A3, A4, A5, B4-JIS, B5-JIS
Print speed (black, draft quality, A4/US Letter)	28 ppm	Memory upgrade	0.544 GB
Colour *	✓	Print margin bottom (A4)	5 mm
Print technology *	Laser	Print margin left (A4)	5 mm
Duplex printing *	✓	Print margin right (A4)	5 mm
Maximum resolution *	600 x 600 DPI	Print margin top (A4)	5 mm
Print speed (black, normal quality, A4/US Letter) *	27 ppm	Typefaces	80 internal scalable fonts available to HP PCL and HP Postscript Level 3 Emulation
Print speed (colour, draft quality, A4/US Letter)	28 ppm	Media weights by paper path	Tray 1: up to 200 g/m ² ; Tray 2, 3, 4, 5: up to 120 g/m ²
Print speed (black, normal quality, A3)	14 ppm	Recommended media weight	Tray 1: 60 - 200; Tray 2, 3, 4, 5: 60 - 120
Print speed (colour, normal quality, A3)	14 ppm	Standard output capacity for envelopes	40 sheets
Warm-up time	120 s	Minimum system requirements	Microsoft Windows 2000: 300 MHz Processor with 64 MB of RAM; Windows XP: 233 MHz Processor with 64 MB of RAM; 180 MB free hard disk space for Windows, 1 GHz processor, 512 MB RAM (Windows Vista Ready, check user guide for minimum hard drive space), 160 MB for Mac; Mac OS 9.0, 9.04, 9.1, 9.2, 10.1; CD-ROM drive or Internet connection; dedicated IEEE-1284 parallel port
Time to first page (black, normal)	16 s	Envelope feeder	✗
Features		Printer management	HP Web Jetadmin, HP Embedded Web Server, HP eToolbox
Number of print cartridges *	4	Acoustic power emissions	LwAd: 6.6 B(A) (printing), 4.9 B(A) (powersave)
Input & output capacity		Power requirements	Input voltage 100 to 240 VAC (-10/+ 6%), 50/60 Hz (+/- 2 Hz)
Total input capacity *	1100 sheets	Print quality (colour, best quality)	600 DPI
Total output capacity *	250 sheets	Duplex print options	Automatic (standard)
Paper tray 2 input capacity	500 sheets	Print speed (colour, best quality, A4)	28 ppm
Maximum input capacity	2100 sheets	Print speed (black, best quality, A4)	28 ppm
Maximum output capacity	250 sheets	Colour printing technology	HP ImageREt 3600
Paper handling			
Maximum ISO A-series paper size *	A3		
Paper tray media types *	Envelopes, Glossy paper, Labels, Plain paper, Transparencies		
ISO A-series sizes (A0...A9) *	A3, A4, A5		
JIS B-series sizes (B0...B9)	B4, B5		
Duplex media weight	60 - 120 g/m ²		
Media types supported	Paper (plain, light, intermediate, heavy, extra heavy, glossy, heavy glossy, high gloss images, tough, recycle), envelopes, transparencies, labels, cardstock		

Paper handling		Other features	
Media size (tray 1)	Minimum size 76 x 127 mm, maximum size 306 x 470 mm (maximum printable area 297 x 460 mm).	Paper handling	100-sheet multipurpose tray 1, 500-sheet input tray 2/3, optional 500-sheet input tray 4, 250-sheet output bin
Media weight (tray 1)	Up to 200 g/m ²		
Network			
Network ready	✓ Via HP Jetdirect print servers: TCP/IP, IPX/SPX, AppleTalk, Apple Rendezvous compatible, DLC/LLC, Auto-IP, IP Direct Mode, NDS, Bindery, NCP, NDPS, iPrint, Telnet, SLP, IGMP, BOOTP/DHCP, WINS, SNMP v 1 and v 2c, HTTP; may require software from the NOS vendor or third-party vendor: LPD, FTP Printing, IPP	Electromagnetic compatibility	CISPR 22: 1997/EN 55022: 1998 Class B, EN 61000-3-2:2000, EN 61000-3-3: 1995, EN 55024: 1998, FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 4/GB9254-1998, GB17625.1-2003, EMC Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC, and carries the CE-Marking accordingly
Supported network protocols (IPv4)		Standard input trays	3
		Networking features	HP Jetdirect 620n Fast Ethernet Print Server Via HP Jetdirect print servers
		Print quality (black, best quality)	600 x 600 DPI
Performance		Wireless option type	Optional, enabled with purchase of a hardware accessory
Internal memory *	288 MB	Standard output capacity for transparencies	250 sheets
Maximum internal memory	544 MB		
Built-in processor	✓	Driver updates	Latest drivers for all supported operating systems available at http://support/clj5550 . If no access to the Internet, see support flyer that came in printer box.
Processor model	MIPS RISC	Duplex supported media size	A4, A4-rotated, A3, B4-JIS, B5-JIS
Processor frequency	533 MHz	Media handling	Sheetfed
Power		Memory technology	Memory Enhancement technology (MEt)
Power consumption (PowerSave)	24 W	Control panel	LCD backlit panel display with up to 4 lines of text and animated printer graphics, 3 LED status lights. "Cancel job", "Pause/Resume", "Help" buttons
Power consumption (off)	0.3 W	Maximum paper trays	5
System requirements		Media size (tray 2)	A4, A3, A5, B4-JIS, B5-JIS
Minimum system requirements for Macintosh	Mac OS X v 10.2, v 10.3, v 10.4, v 10.5; 4 MB RAM and 160 MB free hard disk space; AppleTalk, Bonjour or USB connectivity solution	Media type and capacity (tray 2)	sheets: 500
Operational conditions		Media weight (tray 2)	Up to 120 g/m ²
Operating temperature (T-T)	15 - 27 °C	Media weight (tray 3)	Up to 120 g/m ²
Storage temperature (T-T)	0 - 35 °C	Paper handling optional/input	Tray 5: 500-sheet input tray
Operating relative humidity (H-H)	10 - 70%	Paper handling standard/input	100-sheet multi-purpose input tray, 2 x 500-sheet input trays, automatic two-sided printing accessory, printer stand
Storage relative humidity (H-H)	10 - 90%	Paper handling standard/output	250-Sheet Output Bin
Operating temperature (T-T)	63 - 77 °F	Power consumption (active)	623 W
Weight & dimensions			
Maximum dimensions (W x D x H)	630 x 1550 x 833 mm		Regulatory standards: Czech Republic (CSN-IEC 60950-IEC 60825-1), Estonia (EEI-EN60950-IEC 60825-1), EU (CE Mark-Low Voltage Directive 73/23/EEC), Germany (TUV- EN60950-IEC 60825-1), Hungary (MEEI- IEC 60950-IEC 60825-1), Lithuania (LS- IEC 60950-IEC 60825-1), Poland (B Mark- IEC 60950-IEC60825-1), Russia (GOST-R50377), Slovakia (IEC 60950-IEC60825-1), Slovenia (SQI- IEC 60950-EN60825-1), South Africa (IEC 60950-IEC60825-1)
Pallet dimensions (W x D x H)	1010 x 780 x 1109 mm		Management security: SNMP v 3, SSL/TLS (HTTPS), 802.1x authentication; wireless network security: WPA (Wi-Fi Protected Access), WEP encryption (40/64- and 128-bit), 802.1x authentication (EAP-PEAP, LEAP, EAP-TTLS, EAP-TLS, EAP-MD5) with RADIUS servers
Weight	108 kg		Colour tables, formatter firmware, software drivers, 1 x 500-sheet input tray, hard disk, memory
Dimensions (WxDxH)	630 x 718 x 833 mm		
Packaging data			
Package weight	138 kg		
Packaging content			
Bundled software	Print drivers and installation software on CD-ROM (HP PCL 5c, HP PCL 6, HP Postscript Level 3 Emulation)	Safety	
Logistics data			
Pallet gross weight	138 kg		
Master (outer) cases per pallet	50 pc(s)		
Layers per pallet	4 pc(s)		
Products per pallet	1 pc(s)		
Other features		Security management description	
Additional paper trays	500-sheet input tray 4 and feeder		
Print quality (black, draft quality)	600 DPI		
Print quality (black, normal quality)	600 DPI		
Power supply type	110~220V	Upgrade type	

Other features		Other features	
Recommended operating temperature range (T-T)	15 - 25 °C	Downloadable software	Microsoft Windows 2000, XP (32-bit and 64-bit drivers), Server 2003 (32-bit and 64-bit drivers); Apple Macintosh OS 9 and later, Mac OS X v.10.1 and later
I/O ports	One IEEE 1284-C compliant bidirectional parallel, one USB (compatible with USB 1.1 specifications), one jetlink, one 10/100Base-TX network port, two EIO slots	Compatible operating systems	Microsoft Windows 2000, XP Home, XP Professional, Windows Vista Ready, Windows Server 2003 (32/64 bit); Mac OS 9 or higher
Custom media sizes	Tray 1: 76.2 x 127 to 216 x 356 mm; Tray 2, optional Tray 3 and Tray 4: 182 x 210 to 216 x 356 mm	Package dimensions (W x D x H)	977.9 x 797.6 x 1110 mm (38.5 x 31.4 x 43.7")
		Pallet dimensions (W x D x H) (imperial)	1010.9 x 779.8 x 1110 mm (39.8 x 30.7 x 43.7")
		Pallet weight (imperial)	137.7 kg (303.6 lbs)
		Product dimensions when open (LxWxD)	63 cm (24.8")
		Weight (imperial)	246 lb
		Acoustic pressure emissions bystander (active, print, copy or scan)	49 dB(A)
		Duplex binding	✓
		First page out (black&white, A4, ready)	16 s
		First page out (black&white, letter, ready)	16 s
		First page out (black&white, letter, sleep)	41 s
		Media sizes supported (imperial)	Letter, legal, statement, executive, 11 x 17 in, ledger, envelopes (No. 10, Monarch)
		Operating altitude (imperial)	10000 ft
		Package weight (imperial)	137.7 kg (303.6 lbs)
		Print speed (black, best quality, letter)	< 27
		Print speed (colour, best quality, letter)	< 27
		Size (imperial)	63 cm (24.8")
		Recommended media weight (duplex, imperial)	16 to 32 lb
		Package dimensions (WxDxH)	979 x 797 x 1109 mm



0829160127170




829160127170



5711045282683



0829160127255



829160127255



0829160127217



829160127217



0807027554420



807027554420




0829160127149



829160127149



0829160127026



829160127026




0883585575244



883585575244



0829160127033



829160127033



0829160127040



829160127040



0829160127057



829160127057




0829160127064



829160127064




0829160127071




829160127071



0829160127088



829160127088

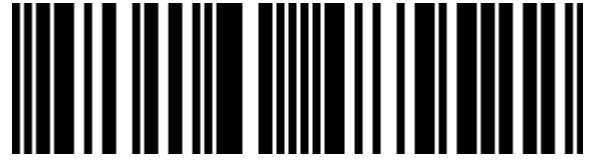

0829160485522



829160485522



0829160127095



829160127095



0829160127101



829160127101




0829160127118



829160127118




0829160127156



829160127156




0829160530529



829160530529



0829160127163



829160127163



0829160582573



829160582573



0829160127187



829160127187




0829160127194



829160127194




0829160127200



829160127200




0829160127224



829160127224



0884420111061



884420111061



0829160127231



829160127231



0829160127248



829160127248



0829160127262



829160127262



0829160127279




829160127279



0884420111054




884420111054

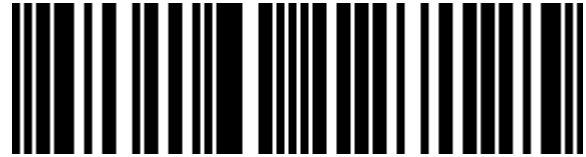

0829160127125



829160127125

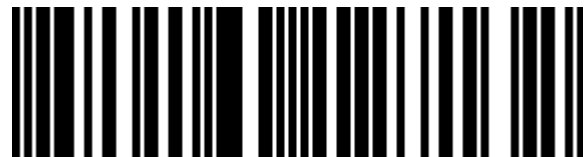

0829160127132



829160127132

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.