



HP LaserJet 9050 Laser A3 600 x 600 DPI 50 ppm

Brand : HP

Product family: LaserJet

Product code: Q3728A

Product name : 9050



HP LaserJet 9050 Laser A3 600 x 600 DPI 50 ppm:

The HP LaserJet 9040/50 MFP boosts the productivity of large workgroups and departments, combining quick, easy printing, copying and colour scanning on up to A3 media, finishing capabilities and digital sending² features with solid reliability and versatile networking. HP LaserJet reliability and simple network management features offer worry-free, self-service operation and seamless integration into your network, with features including HP Jetdirect connectivity and HP Web Jetadmin.

Features

HP LaserJet 9050. Print technology: Laser, Printing: Mono printing, Maximum resolution: 600 x 600 DPI. Copying: Mono copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 600 x 600 DPI. Faxing: Mono faxing. Maximum ISO A-series paper size: A3. Product colour: White



Printing		Paper handling	
Print technology *	Laser	Multi-Purpose Tray media weight	64 - 216 g/m ²
Printing *	Mono printing	Duplex media weight	65 - 199 g/m ²
Duplex printing *	✓	Ports & interfaces	
Maximum resolution *	600 x 600 DPI	Standard interfaces	Parallel
Print speed (black, normal quality, A4/US Letter) *	50 ppm	Parallel ports quantity	1
Print speed (black, normal quality, A3)	25 ppm	Network	
Warm-up time	3 s	Ethernet LAN *	✓
Time to first page (black, normal)	8 s	Performance	
Copying		Maximum internal memory	512 MB
Copying *	Mono copying	Internal storage capacity	40 GB
Maximum copy resolution *	600 x 600 DPI	Card reader integrated	✗
Copy speed (black, normal quality, A4)	50 cpm	Internal memory *	256 MB
Maximum number of copies	999 copies	Processor frequency	533 MHz
Copier resize	25 - 400%	Design	
Maximum copy speed (black, A4)	50 cpm	Product colour *	White
Scanning		Market positioning *	Business
Scanning *	Colour scanning	Touchscreen	✓
Optical scanning resolution *	600 x 600 DPI	Control type	Touch
Maximum scan area	297 x 432 mm	Power	
Scanner type *	Flatbed & ADF scanner	Power consumption (PowerSave)	221 W
Scan to	E-mail	Power consumption (standby)	1070 W
Image formats supported	JPG, TIF	Power consumption (off)	0.9 W
Document formats supported	PDF		
Greyscale levels	256		


Fax		System requirements	
Faxing *	Mono faxing		Windows 2000, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Fax resolution (black)	300 x 300 DPI		
Modem speed	33.6 Kbit/s		
Fax memory	50000 pages		
Fax speed dialing (max numbers)	100	Windows operating systems supported	
Fax broadcasting	100 locations		
Features			
Maximum duty cycle *	300000 pages per month		
Digital sender	✗		
Number of print cartridges *	1		
Printing colours *	Black		Mac OS 8.6, Mac OS 9.0, Mac OS 9.1, Mac OS 9.2, Mac OS X 10.0 Cheetah, Mac OS X 10.1 Puma, Mac OS X 10.2 Jaguar, Mac OS X 10.3 Panther, Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion
Page description languages	PCL 5e, PCL 6, PostScript 3		
Input & output capacity		Mac operating systems supported	
Total number of input trays *	4		
Total input capacity *	3100 sheets		
Total output capacity *	3100 sheets		
Paper input type	Paper tray	Linux operating systems supported	✓
Auto document feeder (ADF)	✓	Minimum RAM	64 MB
Auto document feeder (ADF) input capacity	100 sheets	Minimum storage drive space	180 MB
Standard output capacity for envelopes	10 sheets	Minimum processor	233 MHz
Maximum number of input trays	4	Operational conditions	
Maximum input capacity	3100 sheets	Operating relative humidity (H-H)	10 - 80%
Maximum output capacity	3100 sheets	Recommended operating temperature range (T-T)	10 - 32.5 °C
Paper handling		Storage temperature (T-T)	0 - 35 °C
Maximum ISO A-series paper size *	A3	Operating temperature (T-T)	10 - 32.5 °C
Maximum print size	297 x 420 mm	Storage relative humidity (H-H)	15 - 90%
Paper tray media types *	Card stock, Envelopes, Labels, Plain paper, Recycled paper, Transparencies	Sustainability	
ISO A-series sizes (A0...A9) *	A3, A4, A5	Sustainability certificates	ENERGY STAR
JIS B-series sizes (B0...B9)	B4, B5	Weight & dimensions	
Envelopes sizes	B6, C5, DL	Width	1168.4 mm
Custom media width	148 - 297 mm	Depth	787.4 mm
Custom media length	210 - 432 mm	Height	1193.8 mm
		Weight	143 kg
		Packaging data	
		Package width	977.9 mm
		Package depth	914.4 mm
		Package height	1447.8 mm
		Package weight	181.4 kg
		Other features	
		Networking features	Fast Ethernet
		Acoustic pressure emissions	57 dB
		Network ready	✓
		Print quality (black, normal quality)	600 DPI
		Print margin bottom (A4)	2.9 mm
		Print margin left (A4)	3.2 mm
		Print margin right (A4)	3.7 mm
		Print margin top (A4)	2.1 mm
		Memory upgrade	0.512 GB
		All-in-one functions	Copy, Fax, Print, Scan
		Colour all-in-one functions	Scan
		Colour faxing	✗
		Colour scanning	✓



0829160577821



829160577821

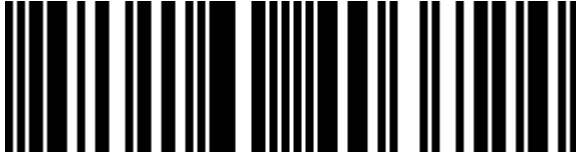

0829160403724



829160403724



0829160403700



829160403700



0829160403793




829160403793



0829160577838



829160577838

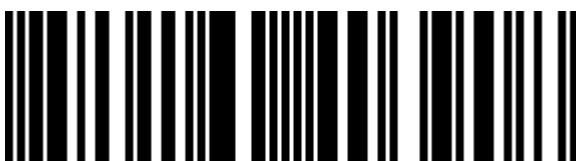

0829160403908




829160403908



0829160403915



829160403915

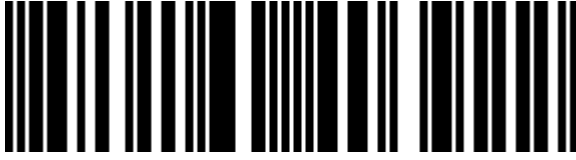

0829160403922




829160403922



0829160403939




829160403939

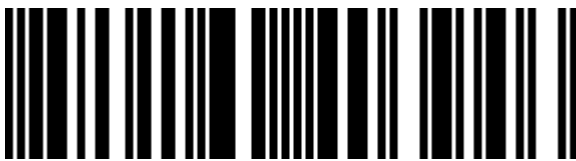

0829160403946




829160403946

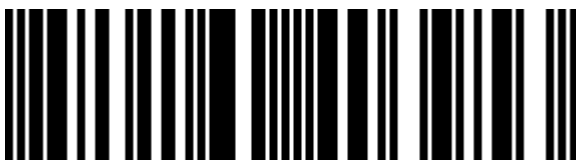

0829160403953



829160403953

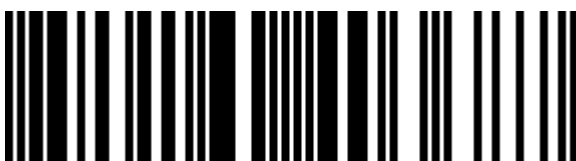

0829160403687




829160403687



0829160403694




829160403694

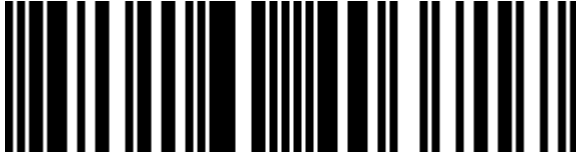

0829160403717




829160403717

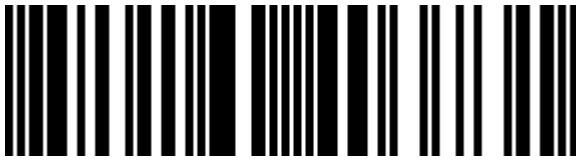

0829160403731




829160403731

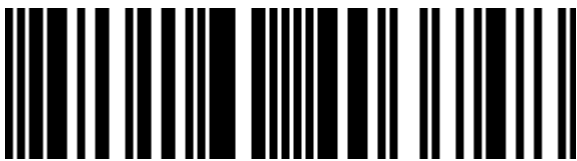

0829160403748




829160403748

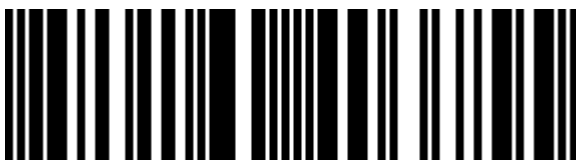

0829160403755



829160403755

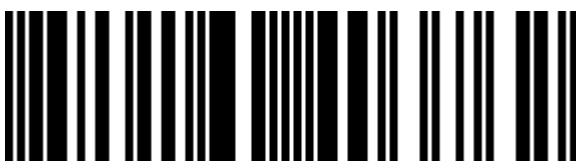

0829160403762



829160403762



0829160403779



829160403779



0829160403786




829160403786



0829160403809




829160403809

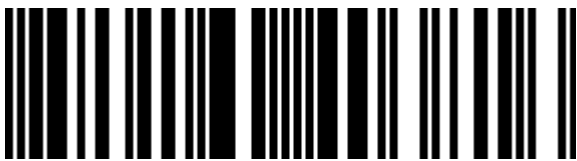

0829160403816




829160403816

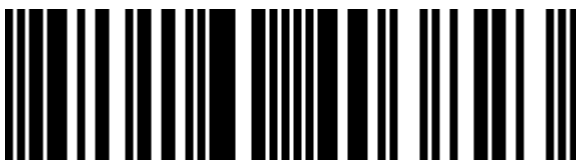

0829160403823



829160403823

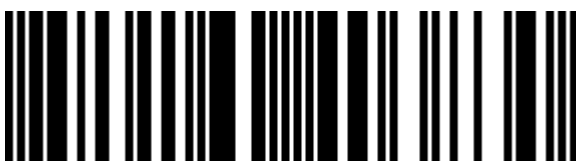

0829160403830



829160403830



0829160403847



829160403847



0829160403854




829160403854



0829160403861




829160403861

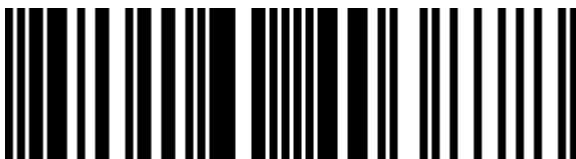

0829160403878



829160403878

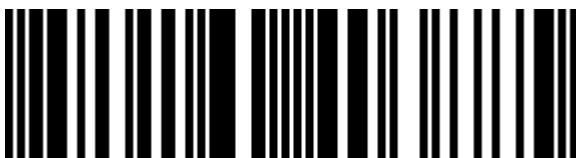

0829160403885



829160403885



0829160403892



829160403892

Disclaimer: The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites. The sites, links and information are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.