



HP LaserJet Color CP6015xh Printer Colour 600 x 1200 DPI

Brand : HP

Product family: LaserJet

Product code: Q3934A

Product name : Color LaserJet CP6015xh Printer

Color LaserJet CP6015xh

HP LaserJet Color CP6015xh Printer. Print technology: Laser, Colour. Number of print cartridges: 4, Maximum duty cycle: 175000 pages per month. Maximum resolution: 600 x 1200 DPI, Print speed (black, normal quality, A4/US Letter): 40 ppm, Duplex printing. Display: LCD. Network ready




Printing		Other features	
Print speed (colour, normal quality, A4/US Letter)	41, 40	Minimum system requirements	Microsoft Windows XP (32-bit and 64-bit), Server 2003 (32-bit and 64-bit), 2000 (32-bit and 64-bit), Windows Vista (32-bit and 64-bit)
Colour *	✓	Envelope feeder	✗
Print technology *	Laser	Printer management	HP Web Jetadmin, HP Embedded Web Server, HP Easy Printer Care
Duplex printing *	✓	Acoustic power emissions	6.9 B(A) (printing at 41 ppm), inaudible (ready)
Maximum resolution *	600 x 1200 DPI	Power requirements	Input voltage 100 to 127 VAC (- 10 /+ 10%), 50/60 Hz (+/- 2 Hz); 220 to 240 VAC (- 10 /+ 10%), 50/60 Hz (+/- 2 Hz)
Print speed (black, normal quality, A4/US Letter) *	40 ppm	Print quality (colour, best quality)	1200 DPI
Print speed (colour, normal quality, A3)	20.5 ppm	Duplex print options	Automatic (standard)
Warm-up time	150 s	Duty cycle letter size (maximum)	175000 pages per month
Time to first page (black, normal)	11 s	Print speed (colour, best quality, A4)	41 ppm
Features		Print speed (black, best quality, A4)	41 ppm
Maximum duty cycle *	175000 pages per month	Paper handling	
Number of print cartridges *	4		
Input & output capacity			
Total input capacity *	2100 sheets	Input: 100-sheet multipurpose tray, 500-sheet input tray 2, 500-sheet tray 3, 500-sheet tray 4 and 500-sheet tray 5 (optional 1 x 500-sheet feeder with cabinet or 3 x 500-sheet feeder); output: 500-sheet face-down output bin (optional 2000-sheet Booklet Maker, optional 1600-sheet Stapler/stacker)	
Total output capacity *	500 sheets		
Maximum input capacity	2100 sheets		
Paper handling			
Maximum print size	312 x 911 mm		
Paper tray media types *	Envelopes, Glossy paper, Labels, Plain paper, Recycled paper, Transparencies		

Paper handling		Other features	
Non-ISO print media sizes	Executive, Legal, Letter		CISPR 22: 1997/EN 55022: 1998 Class B, EN 61000-3-2:2000, EN 61000-3-3: 1995, EN 55024: 1998, FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 4/GB9254-1998, GB17625.1-2003, EMC Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC, and carries the CE-Marking accordingly
Duplex media weight	60 - 220 g/m ²	Electromagnetic compatibility	
Media types supported	Paper (extra heavy, glossy, heavy, heavy glossy, high gloss images, intermediate, light, plain, recycle, tough), envelopes, labels, cardstock, transparencies	Standard input trays	5
Media size (tray 1)	A3, A4, A4-R, A5, envelope (No. 10, DL, C5, B5, Monarch), B4 (JIS), B5 (JIS), executive (JIS), double postcard (JIS), A6, B6, 99 x 140 mm to 320 x 457 mm, Banner: 99 to 320 mm x up to 915 mm	Networking features	Via HP Jetdirect internal Fast Ethernet, Gigabit Ethernet, 802.11b wireless HP Jetdirect Fast Ethernet embedded print server
Media weight (tray 1)	60 to 220 g/m ²	Print quality (black, best quality)	1200 x 600 DPI
Network		Standard output capacity for transparencies	500 sheets
Network ready	✓	Driver updates	UNIX drivers are available at http://go/unixmodelscripts , Linux drivers are available at http://go/linuxprinting , and latest printer information and drivers are available at http://support/cljcp6015
Supported network protocols (IPv4)	IPv4/IPv6: Apple Bonjour Compatible (Mac OS 10.2.4 and later), SNMPv1/v2c/v3, HTTP, HTTPS, FTP, Port 9100, LPD, IPP, Secure-IPP, WS Discovery, IPSec/Firewall; IPv6: DHCPv6, MLDv1, ICMPv6; IPv4: Auto-IP, SLP, TFTP, Telnet, IGMPv2, BOOTP/DHCP, WINS, IP Direct Mode, WS Print; Other: IPX/SPX, AppleTalk, Netware NDS, Bindery, NDPS, iPrint	Duplex supported media size	A3, SRA3, A4, B4 (JIS), B5 (JIS)
Performance		Media handling	Sheetfed
Internal memory *	512 MB	Memory technology	Memory Enhancement technology (MET)
Maximum internal memory	512 MB		LCD control panel display with 4 lines of text and capable of showing graphic animations; 3 status lights; Attention light; Data light; and Ready light. Help (appears as a question mark), Select (appears as a checkmark), Up arrow, Down arrow, Back arrow buttons; Numeric 10-key pad for pin printing and other numeric values
Processor model	PMC	Control panel	
Processor frequency	835 MHz		
Design		Maximum paper trays	5
Display	LCD	Media size (tray 2)	A3, A4, A5, B4 (JIS), B5 (JIS), 148 x 210 mm to 297 x 432 mm
System requirements		Media type and capacity (tray 2)	sheets: 500
Minimum system requirements for Macintosh	Mac OS X v10.2 or higher; PowerPC processor or Intel Core processor	Media weight (tray 2)	60 to 220 g/m ²
Operational conditions		Media weight (tray 3)	60 to 220 g/m ²
Operating temperature (T-T)	10 - 30 °C	Paper handling optional/input	1 x 500 sheet feeder with cabinet or 3 x 500 sheet feeder
Storage temperature (T-T)	0 - 35 °C	Paper handling standard/input	100-sheet multipurpose tray, 500-sheet input tray 2, 500-sheet tray 3, 500-sheet tray 4 and 500-sheet tray 5
Operating relative humidity (H-H)	10 - 80%	Paper handling standard/output	500-sheet face-down output bin
Storage relative humidity (H-H)	5 - 95%		
Operating temperature (T-T)	50 - 86 °F		
Sustainability			
Sustainability certificates	Blue Angel		
Weight & dimensions			
Maximum dimensions (W x D x H)	983 x 1079.5 x 580 mm		
Pallet dimensions (W x D x H)	935 x 800 x 1210 mm		
Weight	119.6 kg		
Dimensions (WxDxH)	704 x 635 x 972.8 mm		
Packaging data			
Package weight	150.8 kg		
Packaging content		Safety	
Bundled software	Print drivers and installation software on CD-ROM, HP PCL 6, HP Postscript Level 3 emulation (HP PCL 5c on web only)		Argentina (TÜV S Mark-Rs.92/98/Ds.1009/98), Australia (AS/NZ 3260), Canada (cUL-CAN/CSA C22.2 No.60950-00), China (GB4943), Czech Republic (CSN-IEC 60950-IEC 60825-1), Estonia (EEI-EN60950-IEC 60825-1), EU (CE Mark-Low Voltage Directive 73/23/EEC), Germany (TÜV-EN60950-IEC 60825-1), Hungary (MEEI- IEC 60950-IEC 60825-1), Japan Radio Law, Lithuania (LS- IEC 60950-IEC 60825-1), Mexico (NOM NYCE-NOM 019 SCFI), Poland (B Mark- IEC 60950-IEC60825-1), (Russia (GOST- R50377), Slovakia (IEC 60950-IEC60825-1), Slovenia (SQI- IEC 60950-EN60825-1), South Africa (IEC 60950-IEC60825-1), USA (UL-UL 60950, FDA-21 CFR Chapter 1 Subchapter J for lasers); Class 1 Laser/LED Product
Logistics data			
Pallet gross weight	119.6 kg		
Master (outer) cases per pallet	1 pc(s)		
Layers per pallet	1 pc(s)		
Products per pallet	1 pc(s)		

Other features		Other features	
Print quality (black, normal quality)	1200 DPI		Advanced Security: Management security: SNMPv3, SSL/TLS (HTTPS), 802.1X Authentication (EAP-PEAP, EAP-TLS), IPSec/Firewall with Kerberos, Certificate, and PreShared Key Authentication
Power supply type	110~220V	Security management description	
Recommended operating temperature range (T-T)	17 - 25 °C	Upgrade type	Memory; finishing devices include stapler/stacker and booklet maker
Mac compatibility	✓		Up to 41 ppm A4 in mono and colour with duplexing at speed make even the longest jobs print quickly. Improved gloss, advanced media sensing and multiple imaging modes for best results on various media. A powerful 835MHz processor lets you print complex jobs with a faster return to the application.
I/O ports	2 host USB 2.0-like ports for third party connections, 1 Hi-Speed USB device port (compatible with USB 2.0 specifications), 2 EIO slots, 1 HP Jetdirect Gigabit Ethernet Print server, 1 Jetlink, 1 accessory port for Kensington Lock	Technical features	
Custom media sizes	Tray 1: 99 x 140 mm to 320 x 457 mm plus banner printing (99 x 320 mm to up to 915 mm), Tray 2: 148 x 210 to 297 x 432 mm; Tray 3,4 & 5: 148 x 210 mm to 305 x 457 mm	Downloadable software	Microsoft Windows Vista, 2000, XP (32-bit and 64-bit drivers), Server 2003 (32-bit and 64-bit drivers); Macintosh OS X V10.2.8 and later
Standard media sizes	A3, A4, A5, A6, B4 (JIS), B5, B5 (JIS), B6, C5, DL, double postcard (JIS), Executive (JIS), Banner	Compatible operating systems	Microsoft Windows 2000, XP Home, XP Professional, Server 2003 (32/64 bit), Server 2008; Windows Vista; Mac OS X v10.2 or higher
Print margin bottom (A4)	2 mm	Package dimensions (W x D x H)	935.2 x 800.1 x 1210.1 mm (36.8 x 31.5 x 47.6")
Print margin left (A4)	2 mm	Pallet dimensions (W x D x H) (imperial)	935.2 x 800.1 x 1210.1 mm (36.8 x 31.5 x 47.6")
Print margin right (A4)	2 mm	Pallet weight (imperial)	119.6 kg (263.6 lbs)
Print margin top (A4)	2 mm	Product dimensions when open (LxWxD)	98.3 cm (38.7")
Typefaces	93 HP fonts (plus Greek, Hebrew, Cyrillic, Arabic)	Weight (imperial)	263.6 lb
Media weights by paper path	Tray 1, 2, 3, 4, 5: 60 to 220 g/m ²	Acoustic pressure emissions bystander (active, print, copy or scan)	54 dB(A)
Recommended media weight	60 - 220 g/m ²	Duplex binding	✓
Standard output capacity for envelopes	10 sheets	First page out (black&white, A4, ready)	11 s
		First page out (black&white, letter, ready)	11 s
		First page out (black&white, letter, sleep)	132 s
		Media sizes supported (imperial)	Letter, legal, executive, 11 x 17 in, ledger, 12 x 18 in, banner 12.6 x 36 in, envelopes (No. 10, Monarch), statement
		Operating altitude (imperial)	Up to 8000 ft
		Package weight (imperial)	151 kg (332.9 lbs)
		Print speed (black, best quality, letter)	< 40
		Print speed (colour, best quality, letter)	< 40
		Size (imperial)	70.4 cm (27.7")
		Standard input capacity for envelopes	10 sheets
		Acoustic power emissions (ready)	Inaudible
		Acoustic pressure emissions bystander (ready)	Inaudible
		Automatic paper sensor	✓
		Maximum input capacity (tray 1)	100 sheets
		SureSupply connection type	Direct and Network
		SureSupply supported	✓
		Recommended media weight (duplex, imperial)	16 to 58 lb bond
		UNSPSC-code	43212110
		Package dimensions (WxDxH)	935 x 800 x 1210 mm



0883585363513




883585363513




0883585363711




883585363711

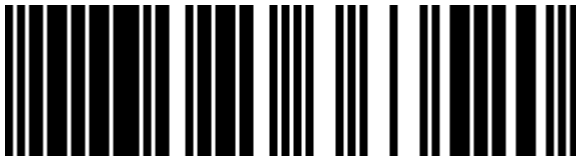


0883585363520




883585363520

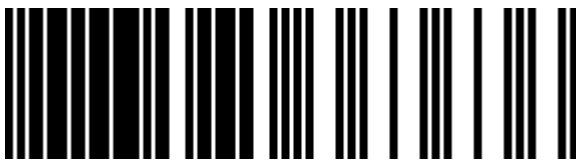

0883585363636



883585363636

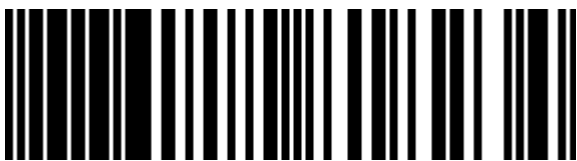

0886112818234



886112818234




0884962829974



884962829974



0883585363667




883585363667




0883585363698




883585363698

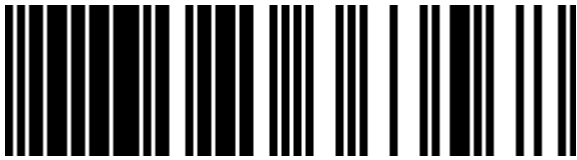


0883585363568




883585363568

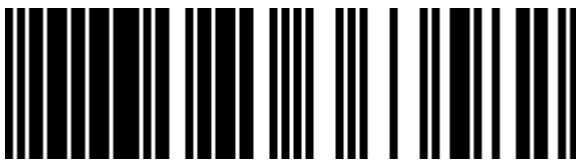

0883585363582



883585363582

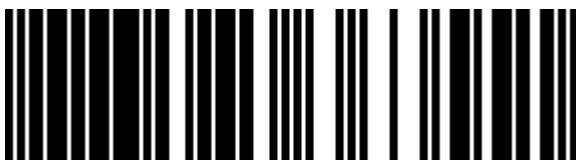

0883585363551



883585363551



0883585363599



883585363599



0883585363605




883585363605




0883585363612




883585363612

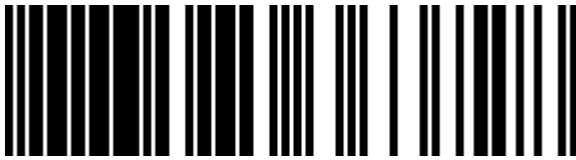

0883585363728




883585363728

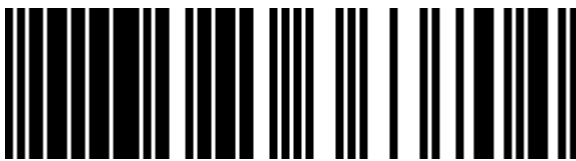

0883585363704



883585363704

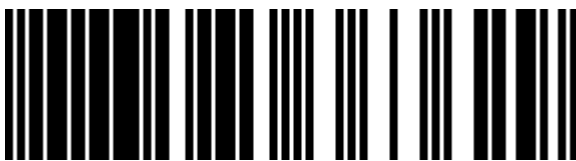

0883585363629



883585363629




0883585363735



883585363735



0883585363575




883585363575




0883585363544




883585363544

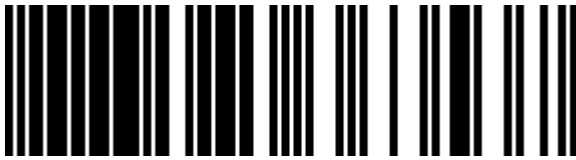

0883585363537



883585363537

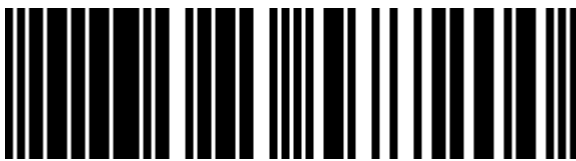

0883585577200



883585577200



0883585363650



883585363650




0883585363643



883585363643




0883585363681




883585363681



0883585363674



883585363674

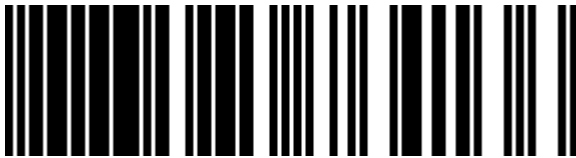

0883585764136



883585764136



0883585384778



883585384778

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.