



HP LaserJet 4350dtn Printer 1200 x 1200 DPI

Brand : HP

Product family: LaserJet

Product code: Q5409A

Product name : LaserJet 4350dtn Printer



Achieve maximum productivity with HP's powerful print solution—up to 52 ppm. This simple, high-performance printer includes standard networking, extra input tray, and two-sided printing, plus expandable options perfectly suited for large work groups.

HP LaserJet 4350dtn Printer 1200 x 1200 DPI:

Boost a large workgroup's productivity with the HP LaserJet 4350 Printer series. Enjoy breakthrough print speeds of up to 52 ppm, a first page out in under 8 seconds plus advanced performance features like a 460 MHz processor, expandable memory, industry-leading internal networking* and HP Smart Printing Technology** in HP printing supplies. Easy to use and manage with an Embedded Web Server and Web Jetadmin and a choice of paper handling and finishing options to meet document creation needs.



ABU - United Kingdom - UK English localization

Printing		Other features	
Print speed (black, draft quality, A4/US Letter)	52, 55	Print margin bottom (A4)	5 mm
Colour *	✗	Print margin left (A4)	5 mm
Duplex printing *	✓	Print margin right (A4)	5 mm
Maximum resolution *	1200 x 1200 DPI	Print margin top (A4)	5 mm
Print speed (black, normal quality, A4/US Letter) *	52 ppm	Typefaces	80
Warm-up time	60 s	Media weights by paper path	60 - 200 g/m2
Time to first page (black, normal)	8 s		
Features		Minimum system requirements	Microsoft Windows 2000: 133 MHz processor, 64 MB RAM, CD-ROM drive; Windows XP: 233 MHz processor, 64 MB RAM, CD-ROM drive; Windows Server 2003: 550 MHz processor, 128 MB RAM (standard edition), 220 MB of free hard disk space for Windows, 1 GHz proces
Maximum duty cycle *	250000 pages per month	Envelope feeder	Yes, 75
Number of print cartridges *	1	Printer management	HP Web Jetadmin, HP LaserJet Utility, HP Embedded Web Server, HP LaserJet Toolbox
Page description languages *	PDF 1.3	Acoustic power emissions	7.1 B(A)
Input & output capacity		Acoustic pressure emissions	64 dB
Total input capacity *	1100 sheets	Power requirements	220 - 240 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz); 100 - 127 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz)
Total output capacity *	300 sheets	Duplex print options	Automatic (standard)
Maximum input capacity	3100 sheets	Print speed (black, best quality, A4)	52 ppm
Maximum output capacity	800 sheets	Paper handling	Base/n:100-sheet multipurpose tray, 1 x 500-sheet input tray, straight-through paper path, optional: 500-sheet or 1500-sheet tray (up to a maximum of 3,100 sheets), duplexer, 500-sheet stacker, stapler/stacker (up to 15 pages stapler/up to 500-sheet stack
Paper handling			
Maximum print size	201.5 x 288.5 mm		
Duplex media weight	60 - 120 g/m ²		
Media types supported	Paper (plain, preprinted, letterhead, prepunched, bond, recycled, color, card stock, rough, cut-sheet, recycled), envelopes, transparencies, labels		
Media size (tray 1)	A4, A5, B5 (JIS), Executive (JIS), 16k (195 x 270mm), envelopes (C5, DL, B5), 76 x 216 to 127 x 356 mm		
Media weight (tray 1)	60 - 200 g/m ²		
Network			
Network ready	✗	Electromagnetic compatibility	CISPR 22: 1997/EN 55022: 1998 Class B, EN 61000-3-2: 2000, EN 61000-3-3: 1995, EN 55024: 1998, FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 4/GB9254-1998, GB17625.1-2003, EMC Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC, and carries t
		Standard input trays	3
		Networking features	Ethernet, Fast Ethernet, Gigabit Ethernet

Network		Other features	
Supported network protocols (IPv4)	Supported via an HP Jetdirect print server: TCP/IP (IP Direct mode; may require software from the NOS vendor or third party vendor: LPD, FTP, IPP), IPX/SPX, DLC/LLC, AppleTalk, Auto-IP, Apple Rendezvous compatible, NDS, Bindery, NCP, Telnet, SLP, IGMP, BOOTP/DHCP, WINS, SNMP (v 1, 2c, 3), HTTP	Print quality (black, best quality)	1200 x 1200 DPI
		Wireless technology	IEEE 802.11b
		Driver updates	Most recent printer drivers and software for all supported operating systems available at http://www.hp.com/support/lj4350 ; if no access to the Internet, see support flyer that came in printer box
		Duplex supported media size	A4, A5, Letter, Legal, Executive, B5
		Media handling	Sheetfed
		Memory technology	Double Data Rate memory technology
		Control panel	Intuitive operation and easy to understand messaging, expanded control panel for context-based problem resolution, 4 x 20 graphical display with help features. Messages can be displayed in 20 languages.
		Maximum paper trays	5
		Media size (tray 2)	A4, Letter, Legal, Executive, B5, A5, 148 x 216 - 210 x 356 mm
		Media type and capacity (tray 2)	500
		Media weight (tray 2)	60 - 120 g/m ²
		Media weight (tray 3)	60 - 120 g/m ²
		Paper handling optional/input	500-sheet or 1500-sheet input tray (up to 5 trays for maximum 3100-sheet input capacity), 75-envelope feeder
		Paper handling standard/input	100-sheet multipurpose tray, two 500-sheet input trays, automatic duplex unit
		Paper handling standard/output	300-sheet output capacity (250-sheet face down, 50-sheet face up)
		Power consumption (active)	790 W
		Safety	Argentina (TUV S Mark-Rs.92/98/Ds.1009/98), Australia (AS/NZ 3260), Canada (cUL-CAN/CSA C22.2 No.60950-00), China (GB4943), Czech Republic (CSN-IEC 60950-IEC 60825-1), Estonia (EEI-EN60950-IEC 60825-1), EU (CE Mark-Low Voltage Directive 73/23/EEC), German
		Management security: SNMP v 3, SSL/TLS (HTTPS), 802.1x authentication (with 620n and 625n EIO print servers); wireless network security: WPA (Wi-Fi Protected Access), WEP encryption (40-/64- and 128-bit), 802.1x authentication (EAP-PEAP, LEAP, EAP-TTLS, EAP-TLS, EAP-MD5) with RADIUS servers	
		Printer firmware and networking firmware can be remotely upgraded	
		1 year on-site warranty. Optional HP Care Pack services available.	
		CompactFlash support enables added functionality	
		Microsoft Windows Installer, HP PCL 6, HP PCL 5e, HP PostScript Level 3 emulation, HP Web Jetadmin, Macintosh Installer, Macintosh PostScript, PostScript Printer Description (PPD) files, IBM drivers, Model scripts, OS/2 PCL 5 or PCL 6 printer driver, OS/2 PS printer driver, UNIX model scripts, Linux drivers, HP OpenVMS drivers	
		Downloadable software	
Performance			
Internal memory *	96 MB		
Maximum internal memory	512 MB		
Built-in processor	✓		
Processor model	MIPS 20KC		
Processor frequency	460 MHz		
Power			
Power consumption (PowerSave)	13 W		
Power consumption (off)	0.3 W		
System requirements			
Minimum system requirements for Macintosh	160 MB free hard disk space, Mac OS 9.x and Mac OS X v 10.1 and later, CD-ROM drive, USB port or IEEE 1284-B compliant parallel port		
Operational conditions			
Operating temperature (T-T)	15 - 32.5 °C		
Storage temperature (T-T)	0 - 35 °C		
Operating relative humidity (H-H)	10 - 80%		
Storage relative humidity (H-H)	10 - 90%		
Sustainability			
Sustainability certificates	ENERGY STAR		
Weight & dimensions			
Maximum dimensions (W x D x H)	412 x 1045 x 670 mm		
Pallet dimensions (W x D x H)	1200 x 800 x 1821 mm		
Weight	32.2 kg		
Dimensions (WxDxH)	418 x 533 x 498 mm		
Packaging data			
Package weight	37.5 kg		
Packaging content			
Bundled software	Print drivers and installation software on CD-ROM (HP PCL 6, HP PCL 5e, PS, PPDs, HP LaserJet Utility, HP LaserJet Toolbox, Macintosh software)		
Logistics data			
Pallet gross weight	244 kg		
Products per pallet	6 pc(s)		
Other features			
Additional paper trays	Optional 500-sheet paper tray (standard on LJ4350tn/dtn/dtnsl), 1500-sheet high-capacity tray		
Print quality (black, draft quality)	600 DPI		
Print quality (black, normal quality)	1200 DPI		
Recommended operating temperature range (T-T)	10 - 32 °C		
Mac compatibility	✓		
I/O ports	1 x IEEE 1284-B 2 x EIO 1 x USB 2.0		
Custom media sizes	76 x 216 - 127 x 356 mm; 148 x 216 - 210 x 356 mm		
Standard media sizes	A4, Letter, Legal, Executive, B5, A5, envelopes (C5, DL, B5)		

Other features		Other features	
Memory upgrade	0.512 GB	Compatible operating systems	OS/2, UNIX, Linux, HP OpenVMS Microsoft Windows 98, Me, NT 4.0, 2000, XP, Server 2003; Apple Mac OS 9.x and later, OS X 10.1 +
		Package dimensions (W x D x H)	720.1 x 600.2 x 557 mm (28.4 x 23.6 x 21.9")
		Pallet dimensions (W x D x H) (imperial)	1201.4 x 800.1 x 1821.2 mm (47.3 x 31.5 x 71.7")
		Pallet weight (imperial)	243.6 kg (537 lbs)
		Product dimensions when open (LxWxD)	41.1 cm (16.2")
		Weight (imperial)	65.5 lb
		Acoustic pressure emissions bystander (active, print, copy or scan)	57 dB(A)
		Duplex binding	✘
		First page out (black&white, A4, ready)	8 s
		First page out (black&white, letter, ready)	8 s
		Media sizes supported (imperial)	Letter, legal, executive, statement, envelopes (No. 10, Monarch)
		Operating altitude (imperial)	10000 ft
		Package weight (imperial)	38 kg (83.7 lbs)
		Print speed (black, best quality, letter)	Up to 55 ppm
		Size (imperial)	41.9 cm (16.5")
		Standard input capacity for envelopes	10 sheets
		Recommended media weight (duplex, imperial)	16 to 32 lb
		UNSPSC-code	43212105
		Package dimensions (WxDxH)	720 x 600 x 557 mm



0829160416755



829160416755



0829160416564




829160416564



0829160416533




829160416533

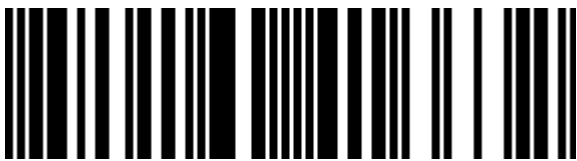

0829160416632




829160416632

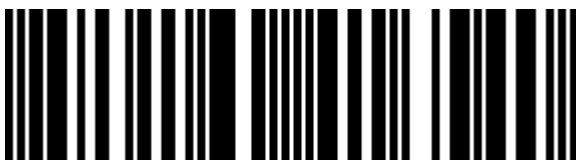

0829160416540



829160416540

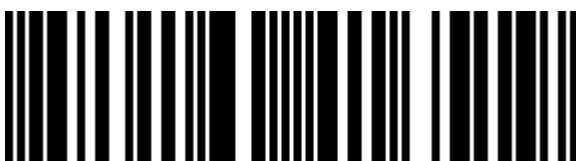

0829160416519




829160416519



0829160416595



829160416595

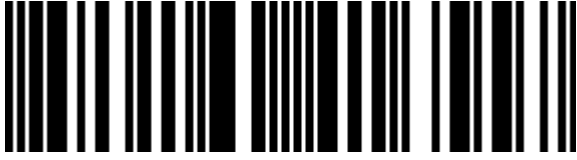

0829160416557




829160416557



0829160416700




829160416700

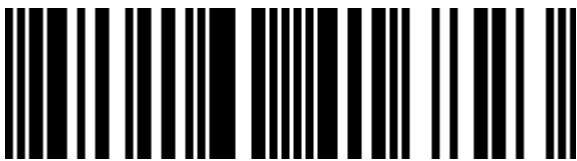

0829160416823




829160416823

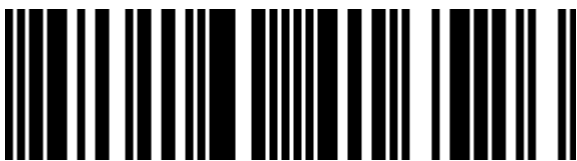

0829160416526



829160416526

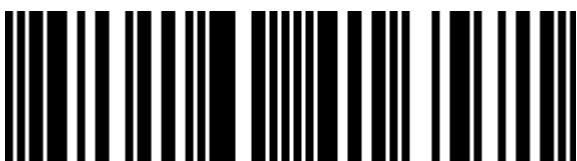

0829160416571




829160416571



0829160416588



829160416588

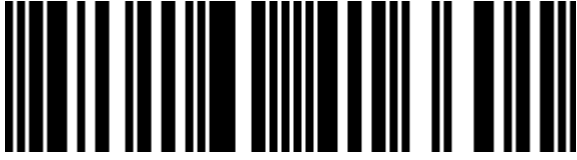

0829160416601




829160416601



0829160416618




829160416618

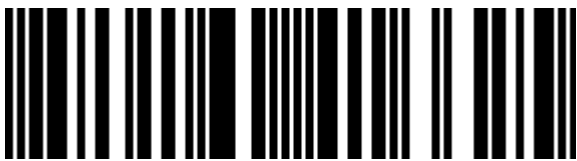

0829160416625




829160416625

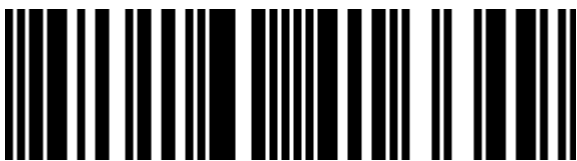

0829160416649



829160416649

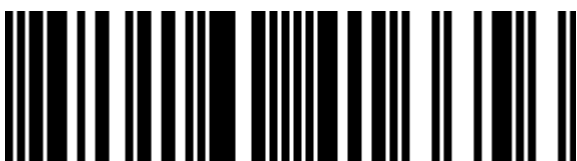

0829160416656




829160416656



0829160416663



829160416663

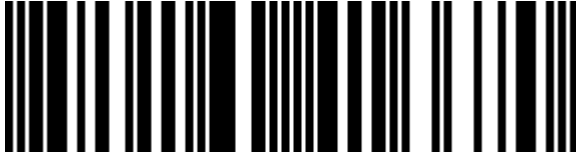

0829160416670




829160416670



0829160416687




829160416687

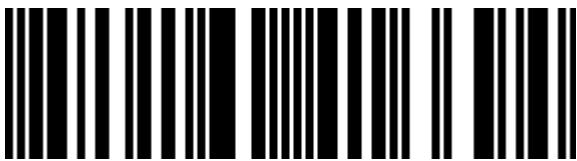

0829160416694




829160416694

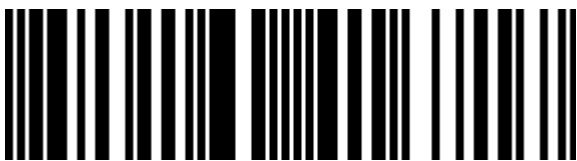

0829160416717



829160416717

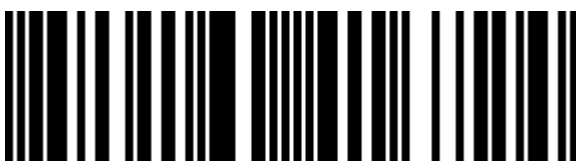

0829160416724




829160416724



0829160416731



829160416731

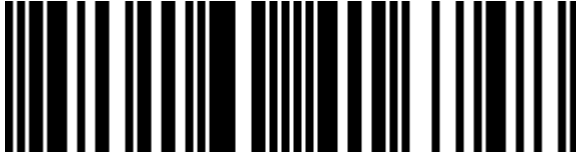

0829160416748



829160416748



0829160416762




829160416762



0882780287938




882780287938

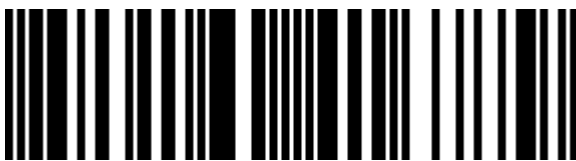

0829160416779



829160416779

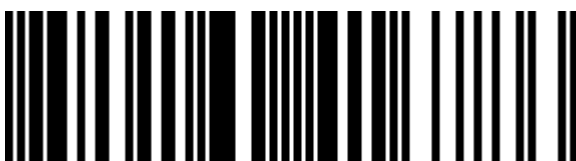

0829160416786



829160416786



0829160416793



829160416793



0829160416809



829160416809



0829160416816



829160416816

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.