



HP LaserJet Color 4700dn Printer Colour 600 x 600 DPI A4 Wi-Fi

Brand : HP

Product family: LaserJet

Product code: Q7493A

Product name : Color LaserJet 4700dn Printer

Color LaserJet 4700dn 30 ppm, 600 x 600 dpi, HP ImageREt 3600, Duplex

HP LaserJet Color 4700dn Printer Colour 600 x 600 DPI A4 Wi-Fi:

HP's top-of-the-line Color LaserJet delivers solid performance with the best print quality and brilliant colour at speed, plus a broad range of paper support. Workgroups achieve more, with print speeds up to 30 ppm, full speed two-sided printing[p1] and up to 2,600-sheet input capacity[p2]. Create impressive business and marketing materials using Imageret technology which ensures professional quality output, high-impact colour, crisp detail, realistic images and excellent photo quality.

HP LaserJet Color 4700dn Printer. Print technology: Laser, Colour. Number of print cartridges: 4, Maximum duty cycle: 100000 pages per month. Maximum resolution: 600 x 600 DPI. Maximum ISO A-series paper size: A4. Print speed (black, normal quality, A4/US Letter): 30 ppm, Duplex printing. Network ready, Wi-Fi. Product colour: Black, Grey, White



Printing		Other features	
Print speed (colour, normal quality, A4/US Letter)	30, 31	Input capacity for envelopes (primary tray)	20 sheets
Colour *	✓	Custom media sizes	Multipurpose tray: 76 x 127 to 216 x 356 mm; 500-sheet input trays: 148 x 210 to 216 x 356 mm
Print technology *	Laser	Standard media sizes	Multipurpose tray: 3 x 5 to 8.5 x 14 in; 500-sheet input trays: 5.8 x 8.3 to 8.5 x 14 in
Duplex printing *	✓	Memory upgrade	16K, Dpostcard (JIS)
Maximum resolution *	600 x 600 DPI	Print margin bottom (A4)	5 mm
Print speed (black, normal quality, A4/US Letter) *	30 ppm	Print margin left (A4)	5 mm
Warm-up time	126 s	Print margin right (A4)	5 mm
Time to first page (black, normal)	10 s	Print margin top (A4)	5 mm
Time to first page (colour, normal)	10 s	Typefaces	93 internal TrueType fonts scalable in HP PCL and HP postscript level 3 emulation; additional font solutions available via Flash memory
Features		Recommended media weight	Tray 1: 60 - 220; Tray 2, 3, 4, 5, 6: 60 - 120
Maximum duty cycle *	100000 pages per month		
Number of print cartridges *	4		
Input & output capacity			
Total input capacity *	600 sheets		
Total output capacity *	500 sheets		
Maximum input capacity	2600 sheets		
Maximum output capacity	750 sheets		
Paper handling			
Maximum ISO A-series paper size *	A4		
Paper tray media types *	Envelopes, Glossy paper, Labels, Plain paper, Recycled paper, Transparencies		
ISO A-series sizes (A0...A9) *	A4, A5		

Paper handling		Other features	
Non-ISO print media sizes	Executive		Microsoft Windows 7 ready. For more information go to http://go/windows7 . Some features may not be available. Windows Vista: 1 GHz processor, 512 MB RAM (check User's Guide for minimum hard drive space); Windows XP: 233 MHz processor, 64 MB RAM;
JIS B-series sizes (B0...B9)	B5		Windows Server 2003 (standard edition): 550 MHz processor, 128 MB RAM; Windows 2000: 133 MHz processor, 64 MB RAM; 220 MB of available hard disk space (for all systems), CD-ROM drive or Internet connection, IEEE 1284-compliant bidirectional parallel port, USB 1.1 or USB 2.0 port
Envelopes sizes	B5, C5, DL		
Duplex media weight	60 - 120 g/m ²		
Media types supported	Multipurpose tray: paper (plain, glossy, colored, preprinted, letterhead, recycled, HP tough and high-gloss laser), envelopes, transparencies, labels, cardstock; 500-sheet input trays: paper (plain, glossy, colored, preprinted, letterhead, recycled, HP tough and high-gloss laser), transparencies, labels	Minimum system requirements	
Media size (tray 1)	A4, A5, B5 (JIS), executive (JIS), 16K, Dpostcard (JIS), envelopes (DL, C5, B5), 76 x 127 to 216 x 356 mm	Envelope feeder	✗
Media weight (tray 1)	60 - 220 g/m ²	Printer management	HP Embedded Web Server, HP Web Jetadmin, HP Easy Printer Care Software, HP LaserJet Utility
Network		Acoustic power emissions	6.7 B(A)
Network ready	✓	Acoustic pressure emissions	50 dB
Wi-Fi *	✓	Power requirements	100 - 127 VAC (+/- 10%), 50/60 Hz (+/-2 Hz); 220 - 240 VAC (+/-10%), 50/60 Hz (+/-2 Hz)
Ethernet LAN *	✓	Print quality (colour, best quality)	600 DPI
Supported network protocols (IPv4)	TCP/IP (IP Direct Mode; may require software from the NOS vendor or third-party vendor: LPD, FTP, IPP), IPX/SPX, DLC/LLC, AppleTalk, Auto-IP, Apple Rendezvous-compatible, NDS, Bindery, NCP, Telnet, SLP, IGMP, BOOTP/DHCP, WINS, SNMP v 1, 2c and 3, HTTP (with standard HP Jetdirect Embedded Fast Ethernet Print Server)	Duplex print options	Automatic (standard)
		Print speed (colour, best quality, A4)	30 ppm
		Print speed (black, best quality, A4)	30 ppm
		Colour printing technology	HP ImageREt 3600
Performance		Paper handling	100-sheet multipurpose tray 1, 500-sheet tray 2, up to four optional 500-sheet paper trays, optional stand, 500 sheet face-down output bin, optional 750-sheet stapler/stacker
Internal memory *	288 MB		
Maximum internal memory	512 MB		
Card reader integrated	✓		
Built-in processor	✓		
Processor model	MIPS RISC		
Processor frequency	533 MHz	Electromagnetic compatibility	EMC: CISPR 22: 1993/A1, A2; EN 55022: 1994/A1, A2 Class B; EN 61000-3-2: 2000; EN 61000-3-3: 1995/A1; EN 55024: 1998/A1, A2; FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 4/GB9254-1998, GB17625.1-1998; EMC Directive 89/336/EEC, the Low Voltage Directive 73/23/EEC and carries the CE-Marking accordingly
Design			
Product colour *	Black, Grey, White		
Power		Standard input trays	2
Power consumption (printing) *	567 W		HP Jetdirect Fast Ethernet embedded print server Fast Ethernet (standard); Gigabit, 802.11g wireless, Bluetooth wireless (optional)
Power consumption (PowerSave)	17 W	Networking features	
Power consumption (off)	0.3 W	Print quality (black, best quality)	600 x 600 DPI
System requirements		Wireless option type	Optional, enabled with purchase of a hardware accessory
Minimum system requirements for Macintosh	Mac OS X v 10.2.8, 10.3, 10.4, 10.5, 10.6; 160 MB available hard disk space; CD-ROM drive; USB port	Standard output capacity for transparencies	100 sheets
Operational conditions		Driver updates	Current HP printer drivers and software can be obtained from the HP Customer Care Web site: http://support/cij4700 .
Operating temperature (T-T)	10 - 30 °C	Duplex supported media size	A4, B5, B5 (JIS)
Storage temperature (T-T)	0 - 35 °C	Media handling	Sheetfed
Operating relative humidity (H-H)	10 - 80%	Memory technology	Memory Enhancement technology (MEt)
Storage relative humidity (H-H)	10 - 85%		7 front-panel buttons (Menu, Select, Stop, Back/Exit, Help, Up arrow, Down arrow), 4-line control panel display, 3 LED status lights (Attention, Data, Ready), enhanced help with animated graphics
Non-operating altitude	9144	Control panel	
Operating temperature (T-T)	62.6 - 77 °F	Maximum paper trays	6
Sustainability			
Sustainability certificates	ENERGY STAR		
Weight & dimensions			
Maximum dimensions (W x D x H)	521 x 950 x 582 mm		
Width	521 mm		
Depth	598 mm		

Weight & dimensions		Other features	
Height	628.6 mm	Media size (tray 2)	A4, A5, B5 (JIS), executive (JIS), 16K, 148 x 210 to 216 x 356 mm
Pallet dimensions (W x D x H)	813 x 661 x 853 mm	Media type and capacity (tray 2)	500
Weight	49.2 kg	Media weight (tray 2)	60 - 120 g/m ²
Dimensions (WxDxH)	521 x 598 x 628.6 mm	Media weight (tray 3)	60 - 120 g/m ²
Packaging data		Paper handling optional/input	Up to four optional 500-sheet paper trays, optional stand
Package width	813 mm	Paper handling standard/input	100-sheet multipurpose tray, 500-sheet tray, duplexer
Package depth	661 mm	Paper handling standard/output	500-sheet face-down output bin
Package height	853 mm		
Package weight	66.5 kg		
Packaging content			
Bundled software	Print drivers and installation software on CD-ROM: HP PCL 5c, HP PCL 6, HP postscript level 3 emulation, HP LaserJet utility, Macintosh software, PostScript Printer Description files		
Logistics data			
Pallet gross weight	67.8 kg	Safety	
Products per pallet	1 pc(s)		
Other features			
Print quality (black, normal quality)	600 DPI		
Recommended operating temperature range (T-T)	17 - 25 °C		
Mac compatibility	✓		
I/O ports	1x USB, 1x parallel, 2x EIO		
		Security management description	Argentina (TUV S Mark-Rs.92/98/Ds.1009/98), Australia (AS/NZ 3260), Canada (cUL-CAN/CSA C22.2 No.60950-1-03), China (GB4943), Czech Republic (CSN-IEC 60950-1, IEC 60825-1), Estonia (EEI-EN60950-1, IEC 60825-1), EU (CE Mark-Low Voltage Directive 73/23/EEC), Germany (TUV-EN60950-1, IEC 60825-1), Hungary (MEEI-IEC 60950-1, IEC 60825-1), Lithuania (LS-IEC 60950-1, IEC 60825-1), Mexico (NOM NYCE-NOM 019 SCFI), Russia (GOST-R50377), Slovakia (IEC 60950-1, IEC60825-1), Slovenia (SQI-IEC 60950-1, EN60825-1), South Africa (IEC 60950-1, IEC60825-1), USA (UL-UL 60950-1; FDA-21 CFR Chapter 1 Subchapter J for lasers); Class 1 Laser/LED Product
		Upgrade type	Management security: SNMP v3, SSL/TLS (HTTPS); optional network security: IPsec, 802.1x authentication; wireless network security: WPA (Wi-Fi Protected Access), WEP encryption (40/64- and 128-bit), 802.1x authentication (EAP-PEAP, LEAP, EAP-TTLS, EAP-TLS, EAP-MD5) with RADIUS servers
		Downloadable software	Color tables, formatter firmware, software drivers
		Compatible operating systems	Download HP Universal Print Driver Series for Windows 1.0 from http://go/mpd4w or http://go/universal_driver
		Package dimensions (W x D x H)	Microsoft Windows 2000, XP Home, XP Professional, XP Professional x64; Certified f/ Windows Vista; Windows Server 2003; Mac OS 9.x; Mac OS X v 10.1
		Pallet dimensions (W x D x H) (imperial)	813.1 x 660.9 x 852.9 mm (32 x 26 x 33.6")
		Pallet weight (imperial)	812.8 x 660.4 x 853.4 mm (32 x 26 x 33.6")
		Weight (imperial)	67.8 kg (149.5 lbs)
		Acoustic pressure emissions bystander (active, print, copy or scan)	107.8 lb
		Duplex binding	50 dB(A)
		First page out (black&white, A4, ready)	✓
		First page out (black&white, letter, ready)	10 s
		First page out (black&white, letter, sleep)	10 s
		Media sizes supported (imperial)	16.5 s
		Operating altitude (imperial)	Letter, legal, statement, executive, envelopes (No. 10, Monarch)
		Package weight (imperial)	7500 ft
			67.8 kg (149.5 lbs)

Other features

Print speed (black, best quality, letter)	< 31
Print speed (colour, best quality, letter)	< 31
Size (imperial)	52.1 cm (20.5")
Acoustic power emissions (ready)	77 dB
Acoustic pressure emissions bystander (ready)	31 dB
SureSupply connection type	Direct and Network
SureSupply supported	✓
Recommended media weight (duplex, imperial)	16 to 32 lb
Package dimensions (WxDxH)	813 x 661 x 853 mm



0829160846248



829160846248



0829160846149



829160846149



0829160962894



829160962894



0829160846231



829160846231



0829160846019



829160846019



0829160846156



829160846156



8291608462174




0829160846217



829160846217



0882780211018



882780211018



0829160846033



829160846033



0829160846170



829160846170



0829160846163



829160846163



0829160846200



829160846200



0829160846194



829160846194



0829160846187



829160846187



0829160846026



829160846026



0829160846071



829160846071



0829160846088



829160846088



0829160846095



829160846095



0829160846064



829160846064



0829160846101



829160846101



0829160846224




829160846224



0829160846279



829160846279

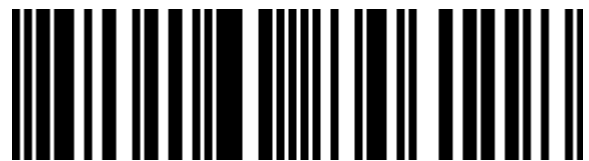

0829160846118



829160846118




0829160846125



829160846125




0829160846255



829160846255



0884420110989



884420110989



0829160846132



829160846132



0829160846262



829160846262



0829160846057




829160846057



0829160846040



829160846040

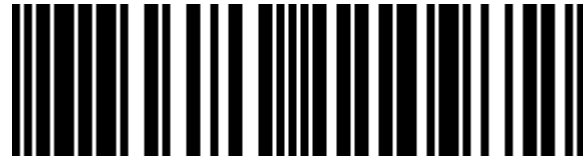

0884420110972



884420110972

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.