



HP LaserJet P3005n Printer 1200 x 1200 DPI

Brand : HP

Product family: LaserJet

Product code: Q7814A

Product name : LaserJet P3005n Printer

Enable productivity with fast, flexible monochrome HP LaserJet printing. Accomplish more with speeds of up to 33 ppm. Enjoy easy connectivity, integrated full-featured networking, paper handling options and best print quality with true 1200 dpi.

HP LaserJet P3005n Printer 1200 x 1200 DPI:

Count on solid performance with the reliable HP LaserJet P3005 Printer series that's built for productivity. Get more done with a fast first page out in 9.5 seconds even from Powersave mode, and speeds of up to 33 ppm. HP print cartridge technology [p1] works with the printing system to deliver professional quality business documents with true 1200 dpi at full engine speed. Easy connectivity and integrated full-featured networking [p2] mean you can share the printer without interruption.

ABU - United Kingdom - UK English localization

HP LaserJet P3005n Printer. Number of print cartridges: 1, Maximum duty cycle: 100000 pages per month. Maximum resolution: 1200 x 1200 DPI, Print speed (black, normal quality, A4/US Letter): 33 ppm. Network ready



Printing		Other features	
Colour *	✗	Standard output capacity for envelopes	10 sheets
Maximum resolution *	1200 x 1200 DPI		Microsoft Windows 2000, XP Home, XP Professional: 1 GHz processor, 512 MB RAM (Windows Vista™, check user guide for minimum hard drive space); 333 MHz processor, 64 MB RAM; Server 2003: 550 MHz processor, 128 MB RAM; 200 MB of available hard disk space
Print speed (black, normal quality, A4/US Letter) *	33 ppm	Minimum system requirements	
Time to first page (black, normal)	9.5 s	Envelope feeder	✗
Economical printing	✓	Printer management	HP Web Jetadmin, HP LaserJet Utility, HP Embedded Web Server, Easy Printer Care
Features		Acoustic power emissions	6.5 B(A)
Maximum duty cycle *	100000 pages per month	Acoustic pressure emissions	51 dB
Number of print cartridges *	1	Power requirements	100 - 127V / 220 - 240V, 50/60 Hz (+/- 2 Hz)
Input & output capacity		Duplex print options	Manual (driver support provided)
Total input capacity *	600 sheets	Print speed (black, best quality, A4)	33 ppm
Total output capacity *	250 sheets		CISPR 22: 1993+A1+A2/EN 55022: 1994+A1+A2 Class B, EN 61000-3-2: 2000, EN 61000-3-3: 1995+A1, EN 55024: 1998+A1+A2, FCC Title 47 CFR, Part 15 Class B (US), ICES-003, Issue 4 (Canada), GB9254-1998, GB17625.1-2003, EMC Directive 89/336/EEC with CE Marking (
Maximum input capacity	1100 sheets	Electromagnetic compatibility	
Maximum output capacity	250 sheets	Standard input trays	2
Paper handling		Networking features	Ethernet, Fast Ethernet
Maximum print size	207.4 x 347.1 mm	Print quality (black, best quality)	1200 x 1200 DPI
Media types supported	Paper (bond, colour, letterhead, plain, preprinted, prepunched, recycled, rough), envelopes, labels, cardstock, transparencies, user-defined	Wireless option type	Optional, enable via I/O ports with purchase of wireless adapter
Media size (tray 1)	A4, A5, B5 (JIS), envelopes, letter, legal, executive, 76 x 127 - 216 x 356 mm	Standard output capacity for transparencies	75 sheets
Media weight (tray 1)	60 - 200 g/m ²	Driver updates	Most recent printer drivers and software for all supported operating systems available at http://www.hp.com/support/LJP3005
Network		Media handling	Sheetfed
Network ready	✓		
Supported network protocols (IPv4)	TCP/IP, IPX/SPX, AppleTalk, DLC/LLC, IP Direct Mode, LPD2, FTP Printing (may require software from the NOS or third-party vendor), IPP2, Netware NDS, Bindery, NDPS, iPrint, Telnet, SLP, IGMP, BOOTP/DHCP, WINS, SNMP, HTTP, Auto-IP, Apple Bonjour Compatible (Mac OS X 10.2.4 and higher)		

Performance		Other features	
Internal memory *	80 MB	Memory technology	Memory Enhancement technology (MET)
Maximum internal memory	320 MB		
Built-in processor	✓		
Processor model	Motorola ColdFire V5		
Processor frequency	400 MHz	Control panel	Graphical display with up to 2 lines of text; Help button to provide information about the message on the display; Back button to back up in menus or exit menus; Pause/Resume button to pause and resume printing; Up Arrow button to navigate to previous ite
Power			
Power consumption (PowerSave)	9 W	Maximum paper trays	3
Power consumption (off)	0.2 W		
System requirements		Media size (tray 2)	A4, A5, B5 (JIS), letter, legal, executive
Minimum system requirements for Macintosh	Mac OS X v10.2.8, 10.3.9, 10.4.3; 200 MB available hard disk space; USB (compatible with USB 2.0 specifications) port or IEEE 1284-B compliant parallel port; CD-ROM drive		
Operational conditions		Media type and capacity (tray 2)	500
Operating temperature (T-T)	15 - 32.5 °C		
Storage temperature (T-T)	-20 - 40 °C	Media weight (tray 2)	60 - 120 g/m ²
Operating relative humidity (H-H)	10 - 80%		
Storage relative humidity (H-H)	10 - 90%	Media weight (tray 3)	60 - 120 g/m ²
Weight & dimensions		Paper handling optional/input	Optional third 500-sheet paper tray
Maximum dimensions (W x D x H)	425 x 780 x 309 mm	Paper handling standard/input	100-sheet multi-purpose tray, 500-sheet input tray
Pallet dimensions (W x D x H)	1200 x 1000 x 2300 mm	Paper handling standard/output	250-sheet output bin, 100-sheet rear output bin
Weight	16.2 kg	Power consumption (active)	600 W
Dimensions (WxDxH)	425 x 410 x 310 mm	Safety	IEC 60950 (International), EN 60950 (EU), IEC 60825-1+A1+A2, UL/cUL Listed (US/Canada), GS License (Europe), EN 60825-1+A11+A2 Class 1, 21 CFR Ch. 1/SubCh. J (Class 1 Laser/LED Device) GB4943-2001, Low Voltage Directive 73/23/EEC with CE Marking (Europe)
Packaging data			
Package weight	20.3 kg	Security management description	Advanced security: SNMPv3, SSL/TLS (HTTPS), 802.1X Authentication (EAP-PEAP, EAP-TLS), IPsec (requires Jetdirect 635n)
Packaging content			
Bundled software	Print drivers and installation software on CD-ROM; Microsoft Windows Installer; Macintosh Installer; HP PCL 5e, HP PCL 6 print drivers for Windows 2000, XP Home, XP Professional; HP postscript level 3 emulation for Windows 2000, XP Home, XP Professional	Downloadable software	Windows Installer, HP PCL 5e driver, HP PCL 6 driver, HP postscript level 3 emulation driver, HP Web Jetadmin, Macintosh installer, Macintosh postscript driver, PostScript Printer Description (PPD) files, IBM drivers, OS/2 PCL 5 or PCL 6 printer driver, OS/2 PS printer driver, UNIX model scripts, Linux drivers, HP OpenVMS drivers
Logistics data			
Pallet gross weight	428.5 kg	Compatible operating systems	OS/2, UNIX, Linux, HP OpenVMS Windows 98 SE, 2000, Me, XP Home, XP Professional, Server 2003; Mac OS v10.2.8, 10.3.9, 10.4.3
Products per pallet	20 pc(s)		
Other features		Package dimensions (W x D x H)	600.2 x 496.1 x 430 mm (23.6 x 19.5 x 16.9")
Additional paper trays	Optional third 500-sheet paper tray		
Print quality (black, draft quality)	600 DPI	Pallet dimensions (W x D x H) (imperial)	1201.4 x 1000.8 x 2301.2 mm (47.3 x 39.4 x 90.6")
Standard input capacity for transparencies	75	Pallet weight (imperial)	427.6 kg (942.7 lbs)
Print quality (black, normal quality)	600 DPI	Product dimensions when open (LxWxD)	42.4 cm (16.7")
Recommended operating temperature range (T-T)	15 - 32.5 °C	Weight (imperial)	Without toner cartridge 35.7 lb
Mac compatibility	✓	Acoustic pressure emissions bystander (active, print, copy or scan)	51 dB(A)
I/O ports	1 x USB 2.0 1 x EIO	Duplex binding	✗
Custom media sizes	76 x 127 - 216 x 356 mm	First page out (black&white, A4, ready)	9.5 s
Standard media sizes	A4, A5, B5 (JIS), letter, legal, executive	First page out (black&white, letter, ready)	9.5 s
Print margin bottom (A4)	5 mm	First page out (black&white, letter, sleep)	9.5 s
Print margin left (A4)	5 mm	Media sizes supported (imperial)	Letter, legal, executive, 8.5 x 13 in, envelopes
Print margin right (A4)	5 mm	Operating altitude (imperial)	10000 ft
Print margin top (A4)	5 mm	Package weight (imperial)	20.2 kg (44.6 lbs)
Typefaces	103		
Media weights by paper path	60 - 200 g/m ² ; 60 - 120 g/m ²		

Other features

Print speed (black, best quality, letter)	Up to 35 ppm
Size (imperial)	42.4 cm (16.7")
Standard input capacity for envelopes	10 sheets
Acoustic power emissions (ready)	Inaudible
Acoustic pressure emissions bystander (ready)	Inaudible
Maximum input capacity (tray 1)	100 sheets
SureSupply connection type	Direct and Network
SureSupply supported	✓
Typical electricity consumption (TEC) number	2.642 kWh/Week
UNSPSC-code	43212105
Package dimensions (WxDxH)	600 x 500 x 430 mm



0882780567009



882780567009



0882780566880



882780566880



0882780566910



882780566910



0882780566965



882780566965



0882780566996



882780566996



0883585486847



883585486847



0882780567887



882780567887




0882780567894



882780567894



0882780566804



882780566804



0882780566811



882780566811



0882780566828



882780566828



0882780566835



882780566835



0882780566859



882780566859



0882780566842



882780566842



0882780566866



882780566866



0882780566873



882780566873



0882780566897



882780566897



0882780566903



882780566903



0882780566927




882780566927



0882780566934



882780566934

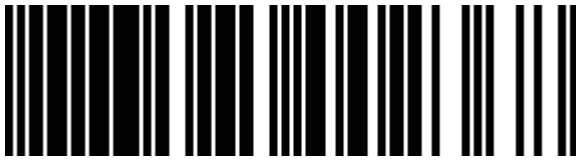

0883585002368



883585002368



0882780566941



882780566941



0882780566958



882780566958



0882780980877



882780980877



0882780566972



882780566972



0882780566989



882780566989



0882780567016



882780567016



0882780567023



882780567023



0882780567030



882780567030



0882780567047



882780567047



0882780567054



882780567054



0882780567863



882780567863



0882780567870



882780567870



0884420197911



884420197911



0883585491247



883585491247

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.