



HP LaserJet Color 2605dn Printer Colour 600 x 600 DPI

Brand : HP

Product family: LaserJet

Product code: Q7822A

Product name : Color LaserJet 2605dn Printer

Color LaserJet 2605dn

HP LaserJet Color 2605dn Printer. Print technology: Laser, Colour. Number of print cartridges: 4, Maximum duty cycle: 35000 pages per month. Maximum resolution: 600 x 600 DPI, Print speed (black, normal quality, A4/US Letter): 12 ppm. Network ready



Printing		Other features	
Print speed (colour, normal quality, A4/US Letter)	10 ppm	Recommended media weight	60 - 105 g/m ²
Print speed (black, draft quality, A4/US Letter)	12 ppm	Standard output capacity for envelopes	10 sheets
Colour *	✓	Minimum system requirements	CD-ROM
Print technology *	Laser	Envelope feeder	✗
Maximum resolution *	600 x 600 DPI	Printer management	Toolbox, HP Web JetAdmin, embedded Web server
Print speed (black, normal quality, A4/US Letter) *	12 ppm	Acoustic power emissions	6.1 B(A)
Print speed (colour, draft quality, A4/US Letter)	10 ppm	Acoustic pressure emissions	47 dB
Time to first page (black, normal)	20 s	Power requirements	110 - 240V; 60/60Hz
Time to first page (colour, normal)	20 s	Print quality (colour, best quality)	600 DPI
Economical printing	✓	Duplex print options	Auto (Standard)
Features		Print speed (colour, full-page colour, normal quality, A4)	10 ppm
Maximum duty cycle *	35000 pages per month	Print speed (colour, best quality, A4)	10 ppm
Number of print cartridges *	4	Print speed (black, best quality, A4)	12 ppm
Input & output capacity		Colour printing technology	Laser
Total input capacity *	250 sheets	Paper handling	Single-sheet priority feed slot, 250-sheet input tray, 125-sheet face-down output bin
Total output capacity *	125 sheets		CISPR 22:1993 +A1 +A2/EN 55022:1994 +A1 +A2 Class B, EN 61000-3-2:2000, EN 61000-3-3:1995+A1, EN 55024:1998+A1 +A2 FCC Title 47 CFR, Part 15 Class B (USA), ICES-003, Issue 4, (Canada), GB9254-1998, EMC Directive 89/336/EEC with CE
Maximum input capacity	500 sheets	Electromagnetic compatibility	
Maximum output capacity	125 sheets	Standard input trays	2
Paper handling			
Maximum print size	207 x 347 mm		
Paper tray media types *	Bond paper, Envelopes, Glossy paper, Labels, Plain paper, Transparencies		
Duplex media weight	60 - 105 g/m ²		

Paper handling		Other features	
Media types supported	Paper (bond, brochure, color, glossy, letterhead, photo, plain, preprinted, prepunched, recycled, rough), transparencies, labels, envelopes, cardstock	Networking features	10/100Base-TX Ethernet/Fast Ethernet
Media size (tray 1)	A4, A5, B5 (ISO, JIS), 76 x 127 to 216 x 356 mm	Print quality (black, best quality)	600 x 600 DPI
Media weight (tray 1)	60 - 176 g/m ²	Standard output capacity for transparencies	50 sheets
Network		Driver updates	http://www.hp.com/support/CLJ2605
Network ready	✓	Duplex supported media size	A4
Supported network protocols (IPv4)	TCP/IP (IP Direct Mode, LPD, SLP, Bonjour, BOOTP/DHCP/AutoIP, WINS, SNMP v1, HTTP)	Media handling	Sheetfed
Performance		Memory technology	Memory Enhancement technology (MET)
Internal memory *	64 MB	Control panel	2-line, 16-character front panel display, 4 buttons (Cancel job, Left arrow, Right arrow, Select); 2 LEDs (Attention, Ready)
Maximum internal memory	320 MB	Maximum paper trays	3
Built-in processor	✓	Media size (tray 2)	A4, A5, B5 (ISO, JIS), 76 x 127 to 216 x 356 mm
Processor model	Freescale Coldfire V5e	Media type and capacity (tray 2)	Sheets: 250
Processor frequency	300 MHz	Media weight (tray 2)	60 - 176 g/m ²
Power		Media weight (tray 3)	60 - 163 g/m ²
Power consumption (printing) *	255 W	Paper handling optional/input	250-sheet input tray
Power consumption (standby)	18 W	Paper handling standard/input	Single-sheet priority feed slot, 250-sheet input tray
Power consumption (PowerSave)	1 W	Paper handling standard/output	125-sheet face-down output bin
Power consumption (off)	0.01 W	Power consumption (active)	255 W
System requirements			IEC 60950-1, EN 60950-1 (EU), IEC 60825-1+A1+A2, UL/cUL Listed (US/Canada), GS License (Europe), EN 60825-1+A11+A2 Class 1, 21 CFR Ch. 1/SubCh. J (Class 1 Laser/LED Device) GB4943-2001, Low Voltage Directive 73/23/EEC with CE
Minimum system requirements for Macintosh	G3, 150 MB, CD-ROM, USB	Safety	
Operational conditions		Security management description	Password-protected network embedded Web server
Operating temperature (T-T)	15 - 32.5 °C	Upgrade type	Memory upgradeable to 320 MB; 250-sheet tray, only one additional tray may be added
Storage temperature (T-T)	-20 - 40 °C	Downloadable software	HP Universal Print Driver Windows CD image Mac CD Image Web JetAdmin
Operating relative humidity (H-H)	10 - 80%	Compatible operating systems	Windows 98SE/ME/2000/XP/2003 Mac OS X v 10.2 +
Storage relative humidity (H-H)	0 - 90%	Package dimensions (W x D x H)	597.9 x 523 x 497.8 mm (23.5 x 20.6 x 19.6")
Sustainability		Pallet dimensions (W x D x H) (imperial)	1198.9 x 1000.8 x 2250.4 mm (47.2 x 39.4 x 88.6")
Sustainability certificates	ENERGY STAR	Pallet weight (imperial)	397.3 kg (876 lbs)
Weight & dimensions		Product dimensions when open (LxWxD)	40.9 cm (16.1")
Maximum dimensions (W x D x H)	407 x 453 x 415 mm	Weight (imperial)	43.8 lb
Pallet dimensions (W x D x H)	1200 x 1000 x 2250 mm	Acoustic pressure emissions bystander (active, print, copy or scan)	47 dB(A)
Weight	19.9 kg	Duplex binding	✓
Dimensions (WxDxH)	407 x 453 x 395 mm	First page out (black&white, A4, ready)	20 s
Packaging data		First page out (black&white, letter, ready)	20 s
Package weight	23.6 kg	Media sizes supported (imperial)	Letter, legal, executive, envelopes (No 10, Monarch)
Packaging content		Operating altitude (imperial)	10000 ft
Bundled software	Toolbox HP Photosmart Premier	Package weight (imperial)	23.6 kg (52 lbs)
Logistics data		Print speed (black, best quality, letter)	Up to 12 ppm
Pallet gross weight	398.2 kg	Print speed (colour, best quality, letter)	Up to 10 ppm
Products per pallet	16 pc(s)	Size (imperial)	40.9 cm (16.1")
Other features			
Print quality (black, draft quality)	600 DPI		
Print quality (black, normal quality)	600 DPI		
Non-operating relative humidity (non-condensing)	0 - 90%		
Recommended operating temperature range (T-T)	20 - 27 °C		
Mac compatibility	✓		
I/O ports	1x USB 1x RJ-45		
Custom media sizes	(76 x 127) - (216 x 356) mm		
Standard media sizes	A4, A5, B5 (ISO, JIS)		
Memory upgrade	✓		

Other features		Other features	
Print margin bottom (A4)	3.5 mm	Standard input capacity for envelopes	10 sheets
Print margin left (A4)	3.5 mm	Acoustic power emissions (ready)	46 dB
Print margin right (A4)	3.5 mm	Acoustic pressure emissions bystander (ready)	32 dB
Print margin top (A4)	3.5 mm	Maximum input capacity (tray 1)	1 sheets
Typefaces	80	SureSupply connection type	Direct and Network
Media weights by paper path	Tray 1, 2: 60 to 176 g/m2 (up to 200 g/m2 with HP laser cover papers, up to 220 g/m2 with HP laser glossy photo papers); optional 250-sheet input tray: 60 to 163 g/m2	SureSupply supported	✓
		Recommended media weight (duplex, imperial)	16 to 28 lb
		UNSPSC-code	43212105
		Package dimensions (WxDxH)	598 x 523 x 498 mm



0882780302839



882780302839



0882780302532




882780302532



8827803025250



0882780302525



882780302525



0882780302419



882780302419




0882780302433



882780302433




0882780302457



882780302457




0882780302549



882780302549



0882780302471



882780302471



0882780302488



882780302488



0882780302495



882780302495




0882780302501



882780302501




0882780393097



882780393097




0882780302518



882780302518



0882780302556



882780302556



0882780302563



882780302563



0882780302570



882780302570




0882780302587



882780302587




0882780393103



882780393103



0882780302860



882780302860



0883585595747



883585595747



0882780393080



882780393080



0882780302365



882780302365




0882780302372




882780302372




0882780302389




882780302389

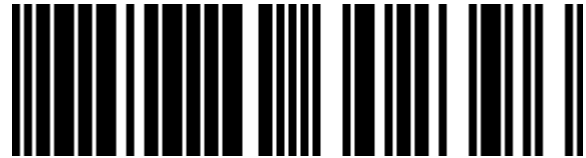

0882780302396



882780302396

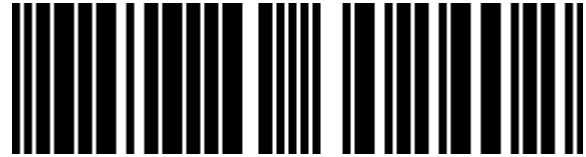

0882780302402



882780302402



0882780302426



882780302426



0882780302440



882780302440



0882780302464



882780302464

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.