



HP LaserJet M5035x 1200 x 1200 DPI 35 ppm

Brand : HP

Product family: LaserJet

Product code: Q7830A

Product name : M5035x

LaserJet M5035x MFP

HP LaserJet M5035x. Printing: Mono printing, Maximum resolution: 1200 x 1200 DPI. Copying: Mono copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 600 x 600 DPI. Faxing: Colour faxing



Printing		Packaging data	
Printing *	Mono printing	Package width	900 mm
Duplex printing *	✓	Package depth	900 mm
Maximum resolution *	1200 x 1200 DPI	Package height	1418 mm
Print speed (black, normal quality, A4/US Letter) *	35 ppm	Package weight	100 kg
Print speed (black, draft quality, A4/US Letter)	35 ppm	Logistics data	
Print speed (black, normal quality, A3)	18 ppm	Pallet gross weight	100 g
Warm-up time	158 s	Products per pallet	1 pc(s)
Time to first page (black, normal)	10 s	Other features	
Print speed (black, best quality, A4)	35 ppm	Standard input trays	4
Print speed (black, best quality, letter)	Up to 35 ppm	I/O ports	1 Hi-Speed USB 2.0; 1 LAN; 1 EIO; 1 FIH; 1 Host USB 2.0; 1 Analog Fax
Copying		Networking features	Via HP Jetdirect embedded networking, HP Jetdirect internal print servers, HP Jetdirect external print servers, HP wireless print servers, and HP connectivity cards
Copying *	Mono copying	Dimensions (WxDxH)	743 x 743 x 997 mm
Maximum copy resolution *	600 x 600 DPI	Acoustic power emissions	6.6 B(A) (printing at 35 ppm)
Time to first copy (letter)	12 sec	Copier smart software features	Up to A3 capable copying on the glass and through the automatic document feeder, 50 page ADF, duplexing (optional), reduce/enlarge, contrast adjustments, mixed originals support, stapling on xs bundle
Maximum number of copies	1000 copies	Duplex print options	Automatic (standard)
Copy resolution (black graphics)	Up to 600 x 600 dpi		
Left metric copy margin	5 mm		
Right metric copy margin	5 mm		
Top metric copy margin	6 mm		

Copying		Other features	
Copier settings	Sides, staple collate, image adjustment, reduce/enlarge, paper selection, content orientation, output bin, pages per sheet, booklet format, optimize text/picture, original size, job build, edge to edge	Media weights by paper path	Tray 1: 60 to 199 g/m ² ; Additional input trays and output finishing devices: 60 to 120 g/m ² ; Automatic document feeder: 60 to 120 g/m ²
Bottom copy margin	6 mm	Network ready	✓
Maximum copy speed (black, A4)	35 cpm	Pallet dimensions (W x D x H)	900 x 900 x 1418 mm
Copy speed (black, best, letter)	Up to 35 cpm	Power requirements	Input voltage 220 to 240 VAC (+/- 10%), 50 Hz (+/- 2 Hz), 6 amp
Scanning		Power supply type	110/200V
Scanning *	Colour scanning	Print quality (black, draft quality)	600 DPI
Optical scanning resolution *	600 x 600 DPI	Printer management	HP Web Jetadmin; HP Easy Printer Care Software (neither is shipped in box)
Scanner type *	Flatbed scanner	Standard media sizes	A4, B4, B5, A5, A3
Input colour depth	30 bit	Typefaces	80 scalable TrueType fonts
Greyscale levels	256	Modem type	33.6 Kbps
Scan input modes	Front-panel scan, copy, fax, e-mail, ADF	Media types supported	Paper (plain, photo, banner), envelopes, labels, cards (index, greeting), transparencies, letter, pre-punched, recycled
Scanner features	Colour scanning of up to A3-size documents, 50-page ADF	Minimum system requirements for Macintosh	Mac OS 10.2 and higher, 128 MB RAM, 25 MB available hard disk space, network or USB port
Scan speed (black, normal quality)	Up to 35 ppm	Print quality (black, best quality)	1200 x 1200 DPI
Scan speed (colour, normal quality)	Up to 23 ppm	Print quality (black, normal quality)	600 DPI
Minimum scan size	27.9 x 43.2 cm	Maximum dimensions (W x D x H)	743 x 743 x 1183 mm
Fax		Print margin bottom (A4)	2 mm
Faxing *	Colour faxing	Print margin left (A4)	2 mm
Modem speed	33.6 Kbit/s	Print margin right (A4)	2 mm
Auto-redialing	✓	Print margin top (A4)	2 mm
Fax speed dialing (max numbers)	100	Printer smart software features	Up to A3 capable printing, full HP LaserJet printing functionality, HP ProRes 1200 at full engine speed, duplexing available, Instant-on Technology, HP Smart printing technology
Fax forwarding	✓	Standard output capacity for transparencies	200 sheets
Fax broadcasting	100 locations	Driver updates	The latest software and drivers are available for the HP LaserJet M5035 MFP from the HP Website at http://support/ljm5035mfp
Fax delayed sending	✗	Duplex supported media size	A3, A4 (L), A5, B4, B5
Auto reduction	✓	Scan file formats	JPG, PDF, TIFF
Distinctive ring	✗	Image scaling/enlargement range	25 - 400%
Features		Memory upgrade	0.512 GB
Maximum duty cycle *	200000 pages per month	Memory technology	Memory Enhancement technology (MEt)
Digital sender	✗	Control panel	4 job control buttons, 13 button numeric keypad, touch screen graphical display, 3 status lights, 1 display contrast knob
Number of print cartridges *	1		
Page description languages	PCL 5, PCL 6, PDF 1.4		
All-In-One-multitasking	✓		
HP segment	Enterprise		
Input & output capacity			
Total input capacity *	1100 sheets		
Total output capacity *	250 sheets		
Maximum input capacity for envelopes	Up to 10 envelopes		
Standard output capacity for envelopes	25 sheets		
Maximum input capacity	2100 sheets		
Maximum output capacity	250 sheets		
Paper handling			
Maximum print size	307.9 x 465.9 mm		
Auto Document Feeder (ADF) media weight	60 to 120		
Duplex media weight	60 - 120 g/m ²		
Envelope feeder	✗		
Media weight (tray 1)	60 to 199 g/m ²		
Media handling	Sheetfed		
Maximum paper trays	6		
Paper handling optional/input	Optional 3x 500-sheet paper trays		
Paper handling standard/input	Two 250-sheet input trays standard, 100-sheet multi-purpose tray, 500-sheet input tray		

Paper handling		Other features	
Paper handling standard/output	250-Sheet Output Bin		Argentina (TÜV S Mark-Rs.92/98/Ds.1009/98), Australia (AS/NZ 3260), Canada (cUL-CAN/CSA C22.2 No.60950-1-03), China (GB4943), Czech Republic (CSN-IEC 60950-1; IEC 60825-1), Estonia (EEI-EN60950-1; IEC 60825-1), EU (CE Mark-Low Voltage Directive 73/23/EEC), Germany (TÜV-EN60950-1; IEC 60825-1), Hungary (MEEI-IEC 60950-1; IEC 60825-1), Lithuania (LS-IEC 60950-1; IEC 60825-1), (Russia (GOST-R50377), Slovakia (IEC 60950-1; IEC60825-1), Slovenia (SQI- IEC 60950-1; EN60825-1), South Africa (IEC 60950-1; IEC60825-1), US (UL-UL 60950-1; FDA-21 CFR Chapter 1 Subchapter J for lasers), Class 1 Laser/LED Product
Media type and capacity (tray 2)	Sheets: 250 100-sheet multi-purpose tray, two 250-sheet input trays, 500-sheet input tray with storage cabinet, 50-sheet two-sided reversing Automatic Document Feeder (ADF), automatic two-sided printing, 250-sheet output bin		
Paper handling			
Network		Safety	
Supported network protocols (IPv4)	IPv6: DHCPv6, HTTP, HTTPS, Port 9100, LPD, IIP, Secure IIP, MLDv6, ICMPv6; IPv4: FTP, IPP, Secure IPP, Auto-IP, Apple Bonjour compatible, Telnet, SLP, IGVpV2, BOOTP/DHCP, WINS, SNMPv1/v2c/v3, TFTP, HTTP, HTTPS, Port9100, LPD; Other: IPX/SPX, DLC, LLC, Apple		
Performance		Upgrade type	
Internal storage capacity	40 GB		Add additional input capacity with three 500 sheet trays with stand; DSS for additional digital sending capabilities
Internal memory *	256 MB		
Built-in processor	✓		
Processor family	MIPS	Auto document feeder: supported media types and capacity	Sheets: 50
Processor frequency	460 MHz	Media weight (tray 2)	60 to 120 g/m ²
Minimum system requirements	133 MHz processor or higher, 64 MB RAM, 40 MB available hard disk space, USB or network port connection	Media weight (tray 3)	60 to 120 g/m ²
		Media size (tray 2)	A4, B4, B5, LTR, LGL, EXE, A5, 215.9 x 330.2 mm
Design		Compatible operating systems	
Market positioning *	Business		Microsoft Windows 2000, XP Home, XP Professional, XP Professional x64, Server 2003; Windows Vista supported soon (visit /go/windowsvista for more information); Mac OS X v 10.2 or higher
Operational conditions		Downloadable software	
Operating relative humidity (H-H)	20 - 80%		Printing system, PCL 6 driver only, PCL 5 driver only, PS driver only, WJA applet, UPD PCL 5, UPD PS, HP Easy Printer Care Software, PC fax driver
Recommended operating temperature range (T-T)	15 - 35 °C		
Storage temperature (T-T)	13 - 38 °C		
Operating temperature (T-T)	15 - 35 °C		
Storage relative humidity (H-H)	20 - 80%		
Operating temperature (T-T)	50 - 99 °F	Functions	Print, copy, send-to email/network folder, fax
Operating altitude (imperial)	10000 ft	Maximum scan area (imperial)	27.9 cm (11")
Sustainability		Package dimensions (W x D x H)	
Sustainability certificates	ENERGY STAR		899.9 x 899.9 x 1418.1 mm (35.4 x 35.4 x 55.8")
Weight & dimensions		Pallet dimensions (W x D x H) (imperial)	
Width	743 mm		899.2 x 899.2 x 1417.3 mm (35.4 x 35.4 x 55.8")
Depth	743 mm	Pallet weight (imperial)	100 kg (220.5 lbs)
Height	997 mm	Weight (imperial)	192 lb
Weight	93 kg	Size (imperial)	90 cm (35.4")
		Standard input capacity for envelopes	10 sheets
		Acoustic power emissions (active, print, copy or scan)	71 dB
		Acoustic power emissions (ready)	Inaudible
		Acoustic pressure emissions bystander (active, print, copy or scan)	56 dB(A) 51 dB(A)
		Acoustic pressure emissions bystander (ready)	Inaudible
		Auto fax reduction supported	✓
		Copier scaling (Auto Document Feeder)	25 to 400%
		Dimension note (imperial)	base configuration
		Dimension note (metric)	base configuration
		Duplex binding	✗
		First page out (black&white, A4, ready)	8 s

Other features

First page out (black&white, letter, ready)	8 s
First page out (black&white, letter, sleep)	18 s
Junk barrier supported	✓
Maximum input capacity (tray 1)	100 sheets
Maximum scan area (ADF) (imperial)	279.4 x 431.8 mm (11 x 17")
Maximum scan area (ADF)	297 x 432 mm
Media sizes supported (imperial)	Executive, letter, legal, ledger
Minimum scan area (Auto Document Feeder)	137.2 x 431.8 mm (5.4 x 17")
Minimum scan area (ADF)	138 x 210 mm
Minimum scan area	279.4 x 431.8 mm (11 x 17")
Package weight (imperial)	100 kg (220.5 lbs)
SureSupply connection type	Direct and Network
SureSupply supported	✓
Typical electricity consumption (TEC) number	5.975 kWh/Week
Wireless option type	Optional, enabled with purchase of a hardware accessory
Recommended media weight (duplex, imperial)	16 to 32 lb
UNSPSC-code	43212110
Security management description	Private print, HP Secure Storage Erase, network authentication (LDAP SMTP), HP Jetdirect (802.1x) for wired networks, SNMPv3 and HTTPS, and Secure IPP (IPP-S) and IPsec
All-in-one functions	Fax, Scan
Colour all-in-one functions	Fax, Scan, No
Package dimensions (WxDxH)	900 x 900 x 1418 mm
Media size (tray 1)	67.2 x 127 mm postcards, A5, A4, A3, B4, B5, EXE, LTR, LGL, LGR, 76 x 127 mm to 312 x 469.9 mm
Electromagnetic compatibility	CISPR 22:1993/EN 55022:1994 Class A, EN 61000-3-2:2000, EN 61000-3-3:1995, EN 55024:1998, FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 4/GB9254-1998, GB17625.1-2003, EMC Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC, and carries the CE-Marking accordingly



0882780574670



882780574670




0882780574205



882780574205



0882780574595



882780574595



0882780574823



882780574823



0882780574779



882780574779



0882780574786



882780574786



0882780574762



882780574762



0882780574830



882780574830



8849628303146



0887758172773



887758172773



0882780574601



882780574601




0882780574618



882780574618




0882780574625



882780574625




0882780574632



882780574632



0882780957442



882780957442



0882780574649



882780574649



0882780574656



882780574656




0882780574663



882780574663




0882780574687



882780574687




0882780574694



882780574694



0882780574700



882780574700



0882780574717



882780574717



0882780574724



882780574724




0882780574731



882780574731




0882780574748



882780574748




0882780574755



882780574755



0882780574793



882780574793



0882780574809



882780574809



0882780574816



882780574816




0882780574847



882780574847




0882780574854



882780574854



0882780574861




882780574861



0887111951335



887111951335

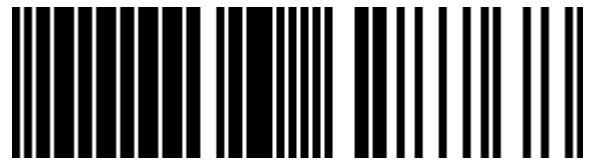

0888793628768



888793628768



0882780574878



882780574878



0882780574885



882780574885



0887111951694



887111951694

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 08-JAN-2024. Prints or copies of Information are only valid on the printed Publication date