



HP LaserJet M5035xs 1200 x 1200 DPI 35 ppm

Brand : HP

Product family: LaserJet

Product code: Q7831A

Product name : M5035xs

LaserJet M5035xs MFP

HP LaserJet M5035xs. Printing: Mono printing, Maximum resolution: 1200 x 1200 DPI. Copying: Mono copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 600 x 600 DPI. Faxing: Colour faxing



Printing		Logistics data	
Printing *	Mono printing	Master (outer) cases per pallet	48 pc(s)
Duplex printing *	✓	Layers per pallet	3 pc(s)
Maximum resolution *	1200 x 1200 DPI	Products per pallet	1 pc(s)
Print speed (black, normal quality, A4/US Letter) *	35 ppm	Other features	
Print speed (black, draft quality, A4/US Letter)	35 ppm	Standard input trays	6
Print speed (black, normal quality, A3)	18 ppm	I/O ports	1 Hi-Speed USB 2.0; 1 LAN; 1 EIO; 1 FIH; 1 Host USB 2.0; 1 Analog Fax
Warm-up time	158 s	Networking features	Via HP Jetdirect embedded networking, HP Jetdirect internal print servers, HP Jetdirect external print servers, HP wireless print servers, and HP connectivity cards
Time to first page (black, normal)	10 s	Dimensions (WxDxH)	743 x 743 x 1183 mm
Print speed (black, best quality, A4)	35 ppm	Acoustic power emissions	6.6 B(A) (printing at 35 ppm)
Print speed (black, best quality, letter)	Up to 35 ppm	Copier smart software features	Up to A3 capable copying on the glass and through the automatic document feeder, 50 page ADF, duplexing (optional), reduce/enlarge, contrast adjustments, mixed originals support, stapling on xs bundle
Copying		Duplex print options	Automatic (standard)
Copying *	Mono copying	Media weights by paper path	Tray 1: 60 to 199 g/m ² ; Additional input trays and output finishing devices: 60 to 120 g/m ² ; Automatic document feeder: 60 to 120 g/m ²
Maximum copy resolution *	600 x 600 DPI	Network ready	✓
Time to first copy (letter)	12 sec		
Maximum number of copies	1000 copies		
Copy resolution (black graphics)	Up to 600 x 600 dpi		
Left metric copy margin	5 mm		
Right metric copy margin	5 mm		
Top metric copy margin	6 mm		

Copying		Other features	
Copier settings	Sides, staple collate, image adjustment, reduce/enlarge, paper selection, content orientation, output bin, pages per sheet, booklet format, optimize text/picture, original size, job build, edge to edge	Pallet dimensions (W x D x H)	900 x 900 x 1567 mm
Bottom copy margin	6 mm	Power requirements	Input voltage 220 to 240 VAC (+/- 10%), 50 Hz (+/- 2 Hz), 6 amp
Maximum copy speed (black, A4)	35 cpm	Power supply type	110/200V
Copy speed (black, best, letter)	Up to 35 cpm	Print quality (black, draft quality)	600 DPI
Scanning		Printer management	HP Web Jetadmin; HP Easy Printer Care Software (neither is shipped in box)
Scanning *	Colour scanning	Standard media sizes	A4, B4, B5, A5, A3
Optical scanning resolution *	600 x 600 DPI	Typefaces	80 scalable TrueType fonts
Scanner type *	Flatbed scanner	Modem type	33.6 Kbps
Input colour depth	30 bit	Media types supported	Paper (plain, photo, banner), envelopes, labels, cards (index, greeting), transparencies, letter, pre-punched, recycled
Greyscale levels	256	Minimum system requirements for Macintosh	Mac OS 10.2 and higher, 128 MB RAM, 25 MB available hard disk space, network or USB port
Scan input modes	Front-panel scan, copy, fax, e-mail, ADF	Print quality (black, best quality)	1200 x 1200 DPI
Scanner features	Colour scanning of up to A3-size documents, 50-page ADF	Print quality (black, normal quality)	600 DPI
Scan speed (black, normal quality)	Up to 35 ppm	Maximum dimensions (W x D x H)	743 x 743 x 1183 mm
Scan speed (colour, normal quality)	Up to 23 ppm	Print margin bottom (A4)	2 mm
Minimum scan size	27.9 x 43.2 cm	Print margin left (A4)	2 mm
Fax		Print margin right (A4)	2 mm
Faxing *	Colour faxing	Print margin top (A4)	2 mm
Modem speed	33.6 Kbit/s	Printer smart software features	Up to A3 capable printing, full HP LaserJet printing functionality, HP ProRes 1200 at full engine speed, duplexing available, Instant-on Technology, HP Smart printing technology
Auto-redialing	✓	Standard output capacity for transparencies	200 sheets
Fax speed dialing (max numbers)	100	Driver updates	The latest software and drivers are available for the HP LaserJet M5035 MFP from the HP Website at http://support/ljm5035mfp
Fax forwarding	✓	Duplex supported media size	A3, A4 (L), A5, B4, B5
Fax broadcasting	100 locations	Scan file formats	JPG, PDF, TIFF
Fax delayed sending	✗	Image scaling/enlargement range	25 - 400%
Auto reduction	✓	Memory upgrade	0.512 GB
Distinctive ring	✗	Memory technology	Memory Enhancement technology (MEt)
Features		Control panel	4 job control buttons, 13 button numeric keypad, touch screen graphical display, 3 status lights, 1 display contrast knob
Maximum duty cycle *	200000 pages per month	Argentina (TÜV S Mark-Rs.92/98/Ds.1009/98), Australia (AS/NZ 3260), Canada (cUL-CAN/CSA C22.2 No.60950-1-03), China (GB4943), Czech Republic (CSN-IEC 60950-1; IEC 60825-1), Estonia (EEI-EN60950-1; IEC 60825-1), EU (CE Mark-Low Voltage Directive 73/23/EEC), Germany (TÜV-EN60950-1; IEC 60825-1), Hungary (MEEI-IEC 60950-1; IEC 60825-1), Lithuania (LS-IEC 60950-1; IEC 60825-1), (Russia (GOST-R50377), Slovakia (IEC 60950-1; IEC60825-1), Slovenia (SQI- IEC 60950-1; EN60825-1), South Africa (IEC 60950-1; IEC60825-1), US (UL-UL 60950-1; FDA-21 CFR Chapter 1 Subchapter J for lasers), Class 1 Laser/LED Product	
Digital sender	✗	Upgrade type	DSS for additional sending capabilities
Number of print cartridges *	1		
Page description languages	PCL 5, PCL 6, PDF 1.4		
All-In-One-multitasking	✓		
Input & output capacity			
Total input capacity *	2100 sheets		
Maximum input capacity for envelopes	Up to 10 envelopes		
Standard output capacity for envelopes	25 sheets		
Maximum input capacity	2100 sheets		
Maximum output capacity	750 sheets		
Paper handling			
Maximum print size	307.9 x 465.9 mm		
Auto Document Feeder (ADF) media weight	60 to 120	Safety	
Duplex media weight	60 - 120 g/m ²		
Envelope feeder	✗		
Media weight (tray 1)	60 to 199 g/m ²		
Media handling	Sheetfed		
Maximum paper trays	6		
Paper handling standard/input	Two 250-sheet input trays standard, 100-sheet multi-purpose tray, three 500-sheet input trays		
Paper handling standard/output	250-sheet output bin, 30-sheet automatic stapler/stacker with 500-sheet output bin		
Media type and capacity (tray 2)	Sheets: 250		

Paper handling		Other features	
Paper handling	100-sheet multi-purpose tray, two 250-sheet input trays, three 500-sheet input trays, 50-sheet two-sided reversing Automatic Document Feeder (ADF), automatic two-sided printing, 250-sheet output bin, 30-sheet automatic stapler/stacker with 500-sheet output bin	Auto document feeder: supported media types and capacity Media weight (tray 2) Media weight (tray 3) Media size (tray 2)	Sheets: 50 60 to 120 g/m ² 60 to 120 g/m ² A4, B4, B5, LTR, LGL, EXE, A5, 215.9 x 330.2 mm
Network		Compatible operating systems	Microsoft Windows 2000, XP Home, XP Professional, XP Professional x64, Server 2003; Windows Vista supported soon (visit /go/windowsvista for more information); Mac OS X v 10.2 or higher
Supported network protocols (IPv4)	IPv6: DHCPv6, HTTP, HTTPS, Port 9100, LPD, IIP, Secure IIP, MLDv6, ICMPv6; IPv4: FTP, IPP, Secure IPP, Auto-IP, Apple Bonjour compatible, Telnet, SLP, IGVPv2, BOOTP/DHCP, WINS, SNMPv1/v2c/v3, TFTP, HTTP, HTTPS, Port9100, LPD; Other: IPX/SPX, DLC, LLC, Apple	Downloadable software	Printing system, PCL 6 driver only, PCL 5 driver only, PS driver only, WJA applet, UPD PCL 5, UPD PS, HP Easy Printer Care Software, PC fax driver
Performance		Functions	Print, copy, send-to email/network folder, fax, advanced paper handling (stapler/stacker)
Internal storage capacity	40 GB	Maximum scan area (imperial)	27.9 cm (11")
Internal memory *	256 MB	Package dimensions (W x D x H)	899.9 x 899.9 x 1566.9 mm (35.4 x 35.4 x 61.7")
Built-in processor	✓	Pallet dimensions (W x D x H) (imperial)	899.2 x 899.2 x 1567.2 mm (35.4 x 35.4 x 61.7")
Processor family	MIPS	Pallet weight (imperial)	104.3 kg (230 lbs)
Processor frequency	460 MHz	Weight (imperial)	213 lb
Minimum system requirements	133 MHz processor or higher, 64 MB RAM, 40 MB available hard disk space, USB or network port connection	Size (imperial)	90 cm (35.4")
Design		Standard input capacity for envelopes	10 sheets
Market positioning *	Business	Acoustic power emissions (active, print, copy or scan)	71 dB
Operational conditions		Acoustic power emissions (ready)	Inaudible
Operating relative humidity (H-H)	20 - 80%	Acoustic pressure emissions bystander (active, print, copy or scan)	56 dB(A) 51 dB(A)
Recommended operating temperature range (T-T)	15 - 35 °C	Acoustic pressure emissions bystander (ready)	Inaudible
Storage temperature (T-T)	13 - 38 °C	Auto fax reduction supported	✓
Operating temperature (T-T)	15 - 35 °C	Copier scaling (Auto Document Feeder)	25 to 400%
Storage relative humidity (H-H)	20 - 80%	Dimension note (imperial)	base configuration
Operating temperature (T-T)	50 - 99 °F	Dimension note (metric)	base configuration
Operating altitude (imperial)	10000 ft	Duplex binding	✗
Sustainability		First page out (black&white, A4, ready)	8 s
Sustainability certificates	ENERGY STAR	First page out (black&white, letter, ready)	8 s
Weight & dimensions		First page out (black&white, letter, sleep)	18 s
Weight	97 kg	Junk barrier supported	✓
Packaging data		Maximum input capacity (tray 1)	100 sheets
Package weight	104.3 kg	Maximum scan area (ADF) (imperial)	279.4 x 431.8 mm (11 x 17")
Logistics data		Maximum scan area (ADF)	297 x 432 mm
Pallet gross weight	104.3 kg	Media sizes supported (imperial)	Executive, letter, legal, ledger
		Minimum scan area (Auto Document Feeder)	137.2 x 431.8 mm (5.4 x 17")
		Minimum scan area (ADF)	138 x 210 mm
		Minimum scan area	279.4 x 431.8 mm (11 x 17")
		Package weight (imperial)	104.3 kg (230 lbs)
		SureSupply connection type	Direct and Network
		SureSupply supported	✓
		Typical electricity consumption (TEC) number	5.975 kWh/Week
		Wireless option type	Optional, enabled with purchase of a hardware accessory

Other features

Recommended media weight (duplex, imperial)	16 to 32 lb
UNSPSC-code	43212110
Security management description	Private print, HP Secure Storage Erase, network authentication (LDAP SMTP), HP Jetdirect (802.1x) for wired networks, SNMPv3 and HTTPS, and Secure IPP (IPP-S) and IPsec
All-in-one functions	Fax, Scan
Colour all-in-one functions	Fax, Scan, No
Package dimensions (WxDxH)	900 x 900 x 1567 mm
Media size (tray 1)	67.2 x 127 mm postcards, A5, A4, A3, B4, B5, EXE, LTR, LGL, LGR, 76 x 127 mm to 312 x 469.9 mm
Electromagnetic compatibility	CISPR 22:1993/EN 55022:1994 Class A, EN 61000-3-2:2000, EN 61000-3-3:1995, EN 55024:1998, FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 4/GB9254-1998, GB17625.1-2003, EMC Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC, and carries the CE-Marking accordingly



8827805750730




0882780575073



882780575073



0882780574977



882780574977



0882780574212



882780574212



0882780574892



882780574892




0882780575158



882780575158




0882780574984



882780574984




0882780575080



882780575080



0882780575097



882780575097



0882780575103



882780575103



0882780575202




882780575202



0882780575165




882780575165

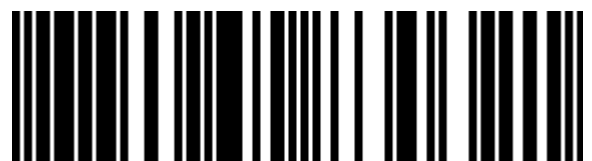

0884962830321




884962830321

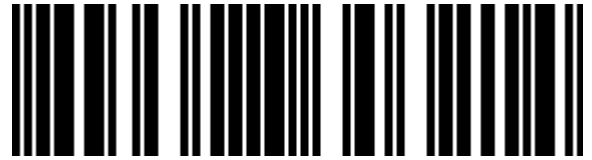

8849628303214



0882780575035



882780575035



0882780574946



882780574946



0884420111214



884420111214



0882780574915



882780574915



0882780574922



882780574922



0882780574939



882780574939




0882780574953



882780574953



0882780574960



882780574960



0884420111221



884420111221



0882780574991



882780574991



0882780575004



882780575004



0882780575011



882780575011




0882780575028



882780575028



0882780575042



882780575042



0882780575059



882780575059



0882780575066



882780575066



0882780575110



882780575110



0882780575127



882780575127




0882780575134



882780575134



0882780575141



882780575141



0882780575172



882780575172



0882780575189



882780575189



0882780575196



882780575196



0882780575219




882780575219



0887111951342



887111951342

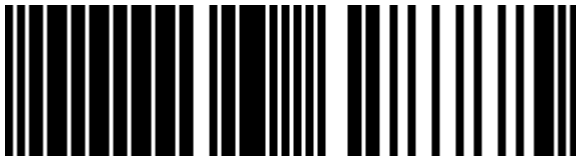

0888793628775



888793628775



0887111951700



887111951700



0887758172780



887758172780



0882780574908



882780574908

Disclaimer. The information published here (the 'Information') is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided 'AS IS' and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites. Sites and/or information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.