



HP DeskJet F380 Thermal inkjet A4 4800 x 1200 DPI 7 ppm

Brand : HP

Product family: DeskJet

Product code: Q8134A

Product name : F380



Enjoy the convenience of home printing, scanning and copying with this easy-to-use all-in-one. Print vibrant photos with optional 6-ink colour [p1] and laser-quality text documents. Get professional-quality photo reprints at the touch of a button.

HP DeskJet F380 Thermal inkjet A4 4800 x 1200 DPI 7 ppm:

Print, scan and copy with this ultra-compact, reliable all-in-one. Enjoy the convenience of colour copying without a PC and the ability to produce photo reprints at the touch of a button. Print and copy at up to 20 ppm black and 14 ppm colour, and get vibrant photos with optional 6-ink colour [p1] in a variety of sizes, plus crisp laser-quality text documents. Scan photos and documents and easily remove red eye from photos with HP Photosmart Real Life technologies.

UUS - Western European region localization



Printing		Operational conditions	
Print technology *	Thermal inkjet	Operating relative humidity (H-H)	15 - 85%
Printing *	Colour printing	Recommended operating temperature range (T-T)	15 - 32 °C
Duplex printing *	✗	Storage temperature (T-T)	-40 - 60 °C
Maximum resolution *	4800 x 1200 DPI	Operating temperature (T-T)	5 - 40 °C
Print speed (black, normal quality, A4/US Letter) *	7 ppm	Storage relative humidity (H-H)	20 - 80%
Print speed (colour, normal quality, A4/US Letter)	2.9 ppm	Weight & dimensions	
Print speed (black, draft quality, A4/US Letter)	20 ppm	Width	426 mm
Print speed (colour, draft quality, A4/US Letter)	14 ppm	Depth	388 mm
Print speed (black, fast normal quality, A4)	7 ppm	Height	170 mm
Print speed (colour, fast normal quality, A4)	4.5 ppm	Weight	4.7 kg
Print speed (black, fast normal quality, letter)	Up to 7 ppm	Packaging data	
Print speed (colour, draft quality, letter)	Up to 14 ppm	Package width	468.4 mm
Print speed (colour, fast normal, letter)	Up to 4.5 ppm	Package depth	235 mm
		Package height	304 mm
		Package weight	5.9 kg
Copying		Packaging content	
Duplex copying *	✗	Bundled software	HP Photosmart Essential, HP Photosmart Express
Copying *	Colour copying	Logistics data	
Maximum copy resolution *	600	Pallet gross weight	496 kg
Copy speed (black, normal quality, A4)	3.9 cpm	Master (outer) cases per pallet	10 pc(s)
Copy speed (colour, normal quality, A4)	2.9 cpm	Layers per pallet	8 pc(s)
Copy speed (colour, draft, A4)	14 cpm	Products per pallet	80 pc(s)
Copy speed (colour, normal, US Letter)	3.9 cpm	Other features	
Maximum number of copies	9 copies	Standard input trays	1
Copy resolution (black graphics)	Up to 600 dpi	I/O ports	1 USB 2.0
Copy resolution (colour text and graphics)	600 DPI	Dimensions (WxDxH)	426 x 388 x 170 mm
Copier settings	Stand-alone copying: fit to page, 100% (with software: photo-size choices and reduce/enlarge)	Acoustic power emissions	Colour printing: 5.6 B(A); black-and-white printing, normal: 6.2 B(A); idle: 3.3 B(A)
		Acoustic pressure emissions	48 dB
		Compatible ink types, supplies	Dye-based (colour), pigment-based (black)
		Custom media sizes	77 x 127 - 216 x 356 mm
		Duplex print options	None (not supported)

Copying		Other features	
Maximum copy speed (black, A4)	20 cpm	Media weights by paper path	75 - 90 g/m ²
Maximum copy speed (colour, A4)	14 cpm	Network ready	✗
Copy speed (black, concept, A4)	20 cpm	Pallet dimensions (W x D x H)	1219 x 1016 x 2553 mm
Scanning		Power requirements	100 - 240 VAC, 50 - 60 Hz
Duplex scanning *	✗	Print quality (black, draft quality)	300 DPI
Scanning *	Colour scanning	Print quality (colour, best quality)	4800 DPI
Optical scanning resolution *	1200 x 2400 DPI	Standard media sizes	DL 110 x 220 mm, C6 114 x 162 mm
Scanner type *	Flatbed scanner	Typefaces	8 TrueType
Scan technology	CIS	Media types supported	Paper (inkjet, photo, plain), envelopes, labels, cards, transparencies, iron-on transfers, HP premium media
Input colour depth	48 bit	Minimum system requirements for Macintosh	Mac OS X v10.3.9, 10.4; G3 128 MB RAM 400 MB USB QuickTime 7.0.3 CD-ROM SVGA 800 x 600
Greyscale levels	256	Print quality (black, best quality)	1200
TWAIN version	1.1	Print quality (black, normal quality)	600 DPI
Scan input modes	Front-panel scan, HP Director, TWAIN	Maximum dimensions (W x D x H)	426 x 482 x 384 mm
Fax		Standard output capacity for transparencies	15 sheets
Duplex faxing	✗	Image scaling/enlargement range	50 - 200%
Faxing *	✗	Print head	2 (1 each black, tri-color)
Features		Safety	IEC 60950-1: 2001; EN 60950-1: 2001; IEC 60825-1 Edition 1.2: 2001/EN 60825-1+A11+A2+A1: 2002 Class 1 (Laser/Led); UL 60950-1: 2003, CAN/CSA-22.2 No. 60950-01-03; NOM 019-SFCI-1993, AS/NZS 60950: 2000, GB4943: 2001
Maximum duty cycle *	1000 pages per month	Technical features	Designed for easy set-up and intuitive, affordable operation. Print and copy up to 20 ppm in black, up to 14 ppm in colour. Scan at 1200 x 2400 dpi optical resolution, 48-bit colour. Organise, enhance, remove red eye, sharpen and crop your photos with HP Photosmart Essential Software. HP Photosmart Share included for easy photo sharing without large attachments* - friends and family simply choose which photos to download. Print borderless 10 x 15 cm snapshots with tear-off tab or in all sizes up to A4 with borders. Standalone copying without having to switch on the PC. Start HP Photosmart Express by clicking on PC desktop icon to share, save and print photos. Photo quality colour printing at up to 4800-optimised dpi or optional 6-ink colour*.
Digital sender	✗	Compatible operating systems	Windows 98, 98 SE, 2000, Me, XP Home, XP Professional; Mac OS X v10.3.9, 10.4
Number of print cartridges *	2	PictBridge	✗
Page description languages	LIDIL	Automatic paper sensor	✗
All-In-One-multitasking	✓	Dimensions with trays up	426 x 260 x 170 mm
Input & output capacity		A6 Card	✓
Total input capacity *	100 sheets	Functions	Color printing, color copying, color scanning, black-and-white printing, black-and-white copying, black-and-white scanning
Total output capacity *	50 sheets	Maximum scan area (imperial)	21.6 cm (8.5")
Standard input capacity for cards	Up to 20 cards	Package dimensions (W x D x H)	467.4 x 234.9 x 304.8 mm (18.4 x 9.25 x 12")
Standard input capacity for transparencies	15	Pallet dimensions (W x D x H) (imperial)	1219.2 x 1016 x 2540 mm (48 x 40 x 100")
Maximum input capacity for envelopes	10	Pallet weight (imperial)	496.7 kg (1095 lbs)
Maximum input capacity for labels	Up to 20 sheets	Weight (imperial)	10.3 lb
Maximum input capacity for transparencies	20 sheets		
Maximum input capacity for 10 x 15 cm photographs	20 sheets		
Standard output capacity for envelopes	10 sheets		
Standard output capacity for cards	10		
Maximum input capacity	100 sheets		
Maximum output capacity	50 sheets		
Paper handling			
Maximum ISO A-series paper size *	A4		
Paper tray media types *	Envelopes, Iron-On Transfers, Labels, Photo paper, Plain paper, Transparencies		
ISO A-series sizes (A0...A9) *	A4, A5, A6		
ISO B-series sizes (B0...B9)	B5		
Envelope feeder	✗		
Recommended media weight	75 - 90 g/m ²		
Maximum input capacity for cards	20		
Media handling	Sheetfed		
Maximum paper trays	1		
Paper handling optional/input	None		
Paper handling standard/input	100-sheet		
Paper handling standard/output	50-sheet		
Ports & interfaces			
Standard interfaces	USB 2.0		
Direct printing *	✗		
USB port	✓		

Network		Other features	
Wi-Fi *	✗	Product dimensions when open (LxWxD)	42.6 cm (16.8")
Ethernet LAN *	✗	Size (imperial)	42.6 cm (16.8")
Performance		Standard input capacity for envelopes	10 sheets
Internal memory *	32 MB	Acoustic power emissions (active, print, copy or scan)	56/62/33 dB
Minimum system requirements	Intel Pentium II, Celeron, or compatible processor (Pentium III or higher recommended); 128 MB RAM (Windows 2000, XP Home, XP Professional; 256 MB or higher recommended); 475 MB available hard disk space; SVGA 800 x 600 monitor with 16-bit colour; Windows 2000 (SP3 or higher), Me, XP Home, XP Professional; Internet Explorer 5.01 (SP2 or higher); CD-ROM drive; available USB port and USB cable for direct connection; Adobe Acrobat Reader 5 or higher recommended; Internet access recommended	Acoustic pressure emissions bystander (active, print, copy or scan)	44 dB(A) (color copy); 48 dB(A) (black-and-white copy); 21 dB(A) (idle)
		Camera phone	✗
		Exifprint supported	Yes, Version 2.2
		Maximum input capacity (photo paper)	20 sheets
		Maximum output capacity (photo paper)	15 sheets
		Maximum output capacity for labels	10 sheets
		Maximum output capacity for transparencies	15 sheets
		Maximum print length (imperial)	14 in
		Media sizes supported (imperial)	Letter, legal, executive, cards, A4
Design		Package weight (imperial)	5.9 kg (13 lbs)
Product colour *	Grey, White	Page yield identifier	DJF300
Market positioning *	Home & office	Photo proofsheets supported	✗
Power		Print speed (colour, draft quality, 10 x 15 photo)	As fast as 44 sec
Power consumption (average operating)	80 W	Print speed (colour, normal quality, 10 x 15 photo)	As fast as 81 sec As fast as 120 sec
System requirements		Printer features	Color printing, color scanning, color copying
Windows operating systems supported	Windows 2000, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	Recommended media weight (imperial)	20 to 24 lb
Mac operating systems supported	Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard	Standard input capacity for legal	100 sheets
Minimum RAM	128 MB	Standard output capacity for labels	10 sheets
Minimum storage drive space	475 MB	Standard output capacity for legal	50 sheets
Minimum processor	Intel Pentium II / Celeron	SureSupply supported	✓
		Video action printing supported	✗
		Vivera inks supported	✗
		All-in-one functions	Scan
		Colour all-in-one functions	Copy, Print, Scan
		Package dimensions (WxDxH)	468.4 x 235 x 304 mm
		Media size (tray 1)	A4, A5, B5 (JIS), C6, DL, Hagaki
		Electromagnetic compatibility	CISPR 22: 1993+A1: 1995+A2: 1996/EN 55022: 1994+A1: 1995+A2: 1997 Class B; CISPR 24: 1997+A1+A2/EN 55024: 1998+A1: 2001+A2: 2003; IEC 61000-3-2: 2000/EN 61000-3-2: 2000; IEC 61000-3-3/A1: 2001/EN 61000-3-3/A1: 2001; CNS13438: 1998, VCCI-2; FCC Part 15-Class B/ICES-003, Issue 4; GB9254: 1998



0882780416178



882780416178



0882780416093




882780416093



0882780416031



882780416031

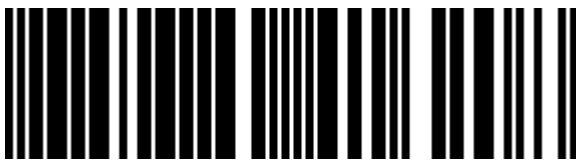

0882780416208



882780416208



0882780416277



882780416277



0882780416215



882780416215



0882780416185



882780416185



0882780416109



882780416109



0882780416116



882780416116



0882780416123



882780416123



0882780416130



882780416130



0882780416062



882780416062



0882780416154



882780416154



0882780416222



882780416222



0882780416192



882780416192



0882780416147



882780416147



0882780416048




882780416048



0882780416055



882780416055

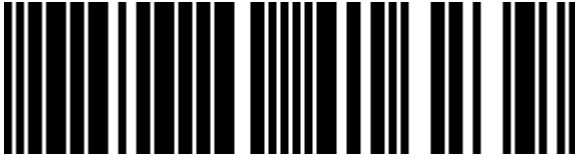

0882780416239



882780416239



0882780416246



882780416246



0882780416253



882780416253



0882780832022



882780832022



0882780416079



882780416079



0882780416260



882780416260



0882780416086



882780416086



0883585011643



883585011643



0882780416161



882780416161



0882780680432



882780680432



0883585275229



883585275229



0882780416024



882780416024

Disclaimer. The information published here (the 'Information') is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided 'AS IS' and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites. Links to 3rd party information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.