



TP-Link TL-SG1210P network switch Unmanaged Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) Grey

Brand : TP-Link

Product code: TL-SG1210P

Product name : TL-SG1210P



- 9 10/100/1000Mbps RJ45 ports, 1 Gigabit SFP port
- With 8 PoE+ ports, transfers data and power on one single cable
- Working with IEEE 802.3af/at compliant PDs, expands home and office network
- 802.1p/DSCP QoS enable smooth latency-sensitive traffic
- High PoE power budget with up to 30W for each PoE port and 63W for all PoE ports
- Easy to use, with no configuration and installation needed

9x 10/100/1000, 1x 1G SFP, PoE+, 63 W PoE budget ports, 209 x 126 x 26 mm

TP-Link TL-SG1210P. Switch type: Unmanaged. Basic switching RJ-45 Ethernet ports type: Gigabit Ethernet (10/100/1000), Basic switching RJ-45 Ethernet ports quantity: 9. MAC address table: 4000 entries, Switching capacity: 20 Gbit/s. Networking standards: IEEE 802.1p, IEEE 802.3af, IEEE 802.3at, IEEE 802.3x. DC input voltage: 53.5 V. Power over Ethernet (PoE). Wall mountable



Management features		Design	
Switch type *	Unmanaged	LED indicators	✓
Quality of Service (QoS) support	✓	Wall mountable	✓
Ports & interfaces		Certification	CE, FCC, RoHS
Basic switching RJ-45 Ethernet ports quantity *	9	Performance	
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Fanless	✓
Gigabit Ethernet (copper) ports quantity	9	Power	
SFP module slots quantity	1	Power supply included *	✗
Network		DC input voltage	53.5 V
Networking standards *	IEEE 802.1p, IEEE 802.3af, IEEE 802.3at, IEEE 802.3x	Input current	1.31 A
10G support *	✗	Power consumption (typical)	7.11 W
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Power consumption (max)	78.13 W
Auto MDI/MDI-X	✓	Power over Ethernet (PoE)	
Auto-negotiation	✓	Power over Ethernet (PoE) *	✓
MAC address auto-learning supported	✓	Power over Ethernet plus (PoE+) ports quantity	8
MAC address auto-aging supported	✓	Total Power over Ethernet (PoE) budget	63 W
Optical fiber		Operational conditions	
Fiber ethernet cabling technology	1000BASE-X	Operating temperature (T-T)	0 - 50 °C
Fiber type	Single-mode	Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)		Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)		Storage relative humidity (H-H)	5 - 90%
Data transmission		Heat dissipation	266.42 BTU/h
Switching capacity *	20 Gbit/s	Weight & dimensions	
MAC address table *	4000 entries	Width	209 mm
Store-and-forward	✓	Depth	126 mm
Height		Height	26 mm
Security		Packaging data	
IGMP snooping	✓	Cables included	AC
		Quick start guide	✓

Design


Product colour	Grey
Housing material	Metal

Packaging data

User guide	✓
Manual	✓

Logistics data

Harmonized System (HS) code	85176990
-----------------------------	----------

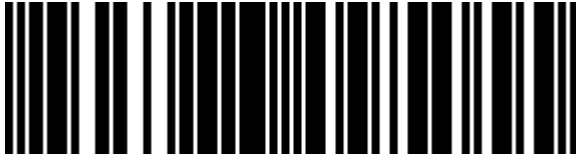

0845973095055



845973095055

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.